District I
1625 N. French Dr., Hobbs, NM 88240
District II
1301 W. Grand Avenue, Artesia, NM 88210
District III
1000 Rio Brazos Road, Aztec, NM 87410
District IV
1220 S. St. Francis Dr., Santa Fe, NM 87505

## State of New Mexico Energy Minerals and Natural Resources Department Oil Conservation Division 1220 South St. Francis Dr. Santa Fe, NM 87505

For temporary pits, closed-loop systems, and below-grade tanks, submit to the appropriate NMOCD District Office.

For permanent pits and exceptions submit to the Santa Fe Environmental Bureau office and provide a copy to the appropriate NMOCD District Office.

2983	Pit, Closed-Loop System Proposed Alternative Method Per			
,	Type of action:  Permit of a pit, closed-loop syste Closure of a pit, closed-loop syste Modification to an existing perm Closure plan only submitted for a below-grade tank, or proposed alternative method	em, below-grade tank, or propo it	sed alternative method	
Instruc	tions: Please submit one application (Form C-144) per indivi	dual pit, closed-loop system, below	y-grade tank or alternative request	
Please be advised environment. Nor	that approval of this request does not relieve the operator of liability r does approval relieve the operator of its responsibility to comply w	y should operations result in pollution with any other applicable government	n of surface water, ground water or the al authority's rules, regulations or ordinanc	es.
1.				
Operator:	Williams Operating Co, LLC	OGRID #:	120782	
Address:	PO Box 640 / 721 S Main Aztec, NM 8741	0		

Operator: Williams Operating Co, LLC	_ OGRID #:	120782
Address: PO Box 640 / 721 S Main Aztec, NM 87410		
Facility or well name: Cox Canyon #004C		
API Number:3004533170 OCD Permit Number:		
U/L or Qtr/Qtr J Section 21 Township 32N Range	11W County:	San Juan
Center of Proposed Design: Latitude36.967662 Longitude _	-107.990953	NAD: □1927 ⊠ 1983
Surface Owner: X Federal X State Private Tribal Trust or Indian Allotment		
2.		
☑ <u>Pit</u> : Subsection F or G of 19.15.17.11 NMAC		
Temporary: 🛛 Drilling 🔲 Workover		
☐ Permanent ☐ Emergency ☐ Cavitation ☐ P&A	•	!
☐ Lined ☐ Unlined Liner type: Thickness20mil ☐ LLDPE ☐ HDPE ☐ P	VC Other	
☐ String-Reinforced		
Liner Seams: ☐ Welded ☒ Factory ☐ Other Volume: _	20,000 bbl Dimensio	ons: L <u>140'</u> x W <u>70'</u> x D <u>12'</u>
3.		
Closed-loop System: Subsection H of 19.15.17.11 NMAC		
Type of Operation: P&A Drilling a new well Workover or Drilling (Applies t intent)	o activities which require pr	for approval of a permit or notice of
☐ Drying Pad ☐ Above Ground Steel Tanks ☐ Haul-off Bins ☐ Other		128293037
☐ Lined ☐ Unlined Liner type: Thicknessmil ☐ LLDPE ☐ HDP	E 🔲 PVC 🗌 Other	2621
Liner Seams:	,	A STORIVED &
4.		
Below-grade tank: Subsection I of 19.15.17.11 NMAC		OCT 2001 DIST. 3 00 OIL CONS. DIV. DIST. DIV. DIS
Volume:bbl Type of fluid:	,	S OIL CONS. DIV. D.
Tank Construction material:		Egio, CIVI
Secondary containment with leak detection  Visible sidewalls, liner, 6-inch lift an	d automatic overflow shut-o	off 02/191814181
☐ Visible sidewalls and liner ☐ Visible sidewalls only ☐ Other		
Liner type: Thicknessmil		
5.		
Alternative Method:		
Submittal of an exception request is required. Exceptions must be submitted to the Santa	Fe Environmental Bureau o	trice for consideration of approval.

Fencing: Subsection D of 19.15.17.11 NMAC (Applies to permanent pits, temporary pits, and below-grade tanks)  Chain link, six feet in height, two strands of barbed wire at top (Required if located within 1000 feet of a permanent residence, school, institution or church)  Four foot height, four strands of barbed wire evenly spaced between one and four feet  Alternate. Please specifyBLM Specifications	hospital,
7.  Netting: Subsection E of 19.15.17.11 NMAC (Applies to permanent pits and permanent open top tanks)  Screen Netting Other  Monthly inspections (If netting or screening is not physically feasible)	
8.  Signs: Subsection C of 19.15.17.11 NMAC  ☐ 12"x 24", 2" lettering, providing Operator's name, site location, and emergency telephone numbers  ☑ Signed in compliance with 19.15.3.103 NMAC	
9.  Administrative Approvals and Exceptions:  Justifications and/or demonstrations of equivalency are required. Please refer to 19.15.17 NMAC for guidance.  Please check a box if one or more of the following is requested, if not leave blank:  Administrative approval(s): Requests must be submitted to the appropriate division district or the Santa Fe Environmental Bureau of consideration of approval.  Exception(s): Requests must be submitted to the Santa Fe Environmental Bureau office for consideration of approval.	office for
Siting Criteria (regarding permitting): 19.15.17.10 NMAC Instructions: The applicant must demonstrate compliance for each siting criteria below in the application. Recommendations of accep material are provided below. Requests regarding changes to certain siting criteria may require administrative approval from the approp office or may be considered an exception which must be submitted to the Santa Fe Environmental Bureau office for consideration of applicant must attach justification for request. Please refer to 19.15.17.10 NMAC for guidance. Siting criteria does not apply to dryi above-grade tanks associated with a closed-loop system.	priate district pproval.
Ground water is less than 50 feet below the bottom of the temporary pit, permanent pit, or below-grade tank.  - NM Office of the State Engineer - iWATERS database search; USGS; Data obtained from nearby wells	☐ Yes ⊠ No
Within 300 feet of a continuously flowing watercourse, or 200 feet of any other significant watercourse or lakebed, sinkhole, or playa lake (measured from the ordinary high-water mark).  - Topographic map; Visual inspection (certification) of the proposed site	☐ Yes ☑ No
Within 300 feet from a permanent residence, school, hospital, institution, or church in existence at the time of initial application.  (Applies to temporary, emergency, or cavitation pits and below-grade tanks)  - Visual inspection (certification) of the proposed site; Aerial photo; Satellite image	☐ Yes ☑ No ☐ NA
Within 1000 feet from a permanent residence, school, hospital, institution, or church in existence at the time of initial application.  (Applies to permanent pits)  - Visual inspection (certification) of the proposed site; Aerial photo; Satellite image	☐ Yes ☐ No ☑ NA
Within 500 horizontal feet of a private, domestic fresh water well or spring that less than five households use for domestic or stock watering purposes, or within 1000 horizontal feet of any other fresh water well or spring, in existence at the time of initial application.  - NM Office of the State Engineer - iWATERS database search; Visual inspection (certification) of the proposed site	☐ Yes ⊠ No
Within incorporated municipal boundaries or within a defined municipal fresh water well field covered under a municipal ordinance adopted pursuant to NMSA 1978, Section 3-27-3, as amended.  - Written confirmation or verification from the municipality; Written approval obtained from the municipality	☐ Yes ⊠ No
Within 500 feet of a wetland.  - US Fish and Wildlife Wetland Identification map; Topographic map; Visual inspection (certification) of the proposed site	☐ Yes ☒ No
Within the area overlying a subsurface mine.  - Written confirmation or verification or map from the NM EMNRD-Mining and Mineral Division	☐ Yes ⊠ No
Within an unstable area.  - Engineering measures incorporated into the design; NM Bureau of Geology & Mineral Resources; USGS; NM Geological Society; Topographic map	☐ Yes ⊠ No
Within a 100-year floodplain FEMA map	☐ Yes ☒ No

C-144 Page 2 of 17 Cox Canyon #4C

Temporary Pits, Emergency Pits, and Below-grade Tanks Permit Application Attachment Checklist: Subsection B of 19.15.17.9 NMAC Instructions: Each of the following items must be attached to the application. Please indicate, by a check mark in the box, that the documents are
attached.  ☐ Hydrogeologic Report (Below-grade Tanks) - based upon the requirements of Paragraph (4) of Subsection B of 19.15.17.9 NMAC ☐ Hydrogeologic Data (Temporary and Emergency Pits) - based upon the requirements of Paragraph (2) of Subsection B of 19.15.17.9 NMAC ☐ Siting Criteria Compliance Demonstrations - based upon the appropriate requirements of 19.15.17.10 NMAC ☐ Design Plan - based upon the appropriate requirements of 19.15.17.12 NMAC ☐ Operating and Maintenance Plan - based upon the appropriate requirements of 19.15.17.12 NMAC
Closure Plan (Please complete Boxes 14 through 18, if applicable) - based upon the appropriate requirements of Subsection C of 19.15.17.9 NMAC and 19.15.17.13 NMAC
Previously Approved Design (attach copy of design) API Number: or Permit Number:
Closed-loop Systems Permit Application Attachment Checklist: Subsection B of 19.15.17.9 NMAC  Instructions: Each of the following items must be attached to the application. Please indicate, by a check mark in the box, that the documents are attached.  Geologic and Hydrogeologic Data (only for on-site closure) - based upon the requirements of Paragraph (3) of Subsection B of 19.15.17.9  Siting Criteria Compliance Demonstrations (only for on-site closure) - based upon the appropriate requirements of 19.15.17.10 NMAC  Design Plan - based upon the appropriate requirements of 19.15.17.11 NMAC  Operating and Maintenance Plan - based upon the appropriate requirements of 19.15.17.12 NMAC  Closure Plan (Please complete Boxes 14 through 18, if applicable) - based upon the appropriate requirements of Subsection C of 19.15.17.9 NMAC and 19.15.17.13 NMAC
Previously Approved Design (attach copy of design) API Number:
Previously Approved Operating and Maintenance Plan API Number:(Applies only to closed-loop system that use
above ground steel tanks or haul-off bins and propose to implement waste removal for closure)
Permanent Pits Permit Application Checklist: Subsection B of 19.15.17.9 NMAC Instructions: Each of the following items must be attached to the application. Please indicate, by a check mark in the box, that the documents are attached.
Hydrogeologic Report - based upon the requirements of Paragraph (1) of Subsection B of 19.15.17.9 NMAC Siting Criteria Compliance Demonstrations - based upon the appropriate requirements of 19.15.17.10 NMAC Climatological Factors Assessment Certified Engineering Design Plans - based upon the appropriate requirements of 19.15.17.11 NMAC Dike Protection and Structural Integrity Design - based upon the appropriate requirements of 19.15.17.11 NMAC Leak Detection Design - based upon the appropriate requirements of 19.15.17.11 NMAC Liner Specifications and Compatibility Assessment - based upon the appropriate requirements of 19.15.17.11 NMAC Quality Control/Quality Assurance Construction and Installation Plan
<ul> <li>□ Operating and Maintenance Plan - based upon the appropriate requirements of 19.15.17.12 NMAC</li> <li>□ Freeboard and Overtopping Prevention Plan - based upon the appropriate requirements of 19.15.17.11 NMAC</li> <li>□ Nuisance or Hazardous Odors, including H₂S, Prevention Plan</li> <li>□ Emergency Response Plan</li> <li>□ Oil Field Waste Stream Characterization</li> <li>□ Monitoring and Inspection Plan</li> <li>□ Erosion Control Plan</li> <li>□ Closure Plan - based upon the appropriate requirements of Subsection C of 19.15.17.9 NMAC and 19.15.17.13 NMAC</li> </ul>
14. Proposed Closure: 19.15.17.13 NMAC
Instructions: Please complete the applicable boxes, Boxes 14 through 18, in regards to the proposed closure plan.
Type: Drilling Workover Emergency Cavitation P&A Permanent Pit Below-grade Tank Closed-loop System Alternative Proposed Closure Method: Waste Excavation and Removal Waste Removal (Closed-loop systems only)
<ul> <li>Waste Removal (Closed-100p systems only)</li> <li>✓ On-site Closure Method (Only for temporary pits and closed-loop systems)</li> <li>✓ In-place Burial ☐ On-site Trench Burial</li> <li>✓ Alternative Closure Method (Exceptions must be submitted to the Santa Fe Environmental Bureau for consideration)</li> </ul>
Waste Excavation and Removal Closure Plan Checklist: (19.15.17.13 NMAC) Instructions: Each of the following items must be attached to the closure plan. Please indicate, by a check mark in the box, that the documents are attached.  Protocols and Procedures - based upon the appropriate requirements of 19.15.17.13 NMAC  Confirmation Sampling Plan (if applicable) - based upon the appropriate requirements of Subsection F of 19.15.17.13 NMAC  Disposal Facility Name and Permit Number (for liquids, drilling fluids and drill cuttings)  Soil Backfill and Cover Design Specifications - based upon the appropriate requirements of Subsection H of 19.15.17.13 NMAC  Re-vegetation Plan - based upon the appropriate requirements of Subsection G of 19.15.17.13 NMAC

C-144 Page 3 of 17 Cox Canyon #4C

16. Waste Removal Closure For Closed-loop Systems That Utilize Above Ground Steel Tanks or Haul-off Bins Only: (19.15.17.13. Instructions: Please indentify the facility or facilities for the disposal of liquids, drilling fluids and drill cuttings. Use attachment if facilities are required.						
Disposal Facility Name: Disposal Facility Permit Number:						
Disposal Facility Name: Disposal Facility Permit Number:						
Will any of the proposed closed-loop system operations and associated activities occur on or in areas that <i>will not</i> be used for future ser   Yes (If yes, please provide the information below)  No						
Required for impacted areas which will not be used for future service and operations:  Soil Backfill and Cover Design Specifications based upon the appropriate requirements of Subsection H of 19.15.17.13 NMAC Re-vegetation Plan - based upon the appropriate requirements of Subsection I of 19.15.17.13 NMAC Site Reclamation Plan - based upon the appropriate requirements of Subsection G of 19.15.17.13 NMAC	.c					
Siting Criteria (regarding on-site closure methods only): 19.15.17.10 NMAC  Instructions: Each siting criteria requires a demonstration of compliance in the closure plan. Recommendations of acceptable sou provided below. Requests regarding changes to certain siting criteria may require administrative approval from the appropriate distributed to the Santa Fe Environmental Bureau office for consideration of approval. Just demonstrations of equivalency are required. Please refer to 19.15.17.10 NMAC for guidance.	trict office or may be					
Ground water is less than 50 feet below the bottom of the buried waste.  - NM Office of the State Engineer - iWATERS database search; USGS; Data obtained from nearby wells	☐ Yes ⊠ No ☐ NA					
Ground water is between 50 and 100 feet below the bottom of the buried waste - NM Office of the State Engineer - iWATERS database search; USGS; Data obtained from nearby wells	☐ Yes ⊠ No ☐ NA					
Ground water is more than 100 feet below the bottom of the buried waste.  - NM Office of the State Engineer - iWATERS database search; USGS; Data obtained from nearby wells	☐ Yes ☐ No ☐ NA					
Within 300 feet of a continuously flowing watercourse, or 200 feet of any other significant watercourse or lakebed, sinkhole, or playa lake (measured from the ordinary high-water mark).  - Topographic map; Visual inspection (certification) of the proposed site	☐ Yes ⊠ No					
Within 300 feet from a permanent residence, school, hospital, institution, or church in existence at the time of initial application.  - Visual inspection (certification) of the proposed site; Aerial photo; Satellite image	☐ Yes ⊠ No					
Within 500 horizontal feet of a private, domestic fresh water well or spring that less than five households use for domestic or stock watering purposes, or within 1000 horizontal feet of any other fresh water well or spring, in existence at the time of initial application.  - NM Office of the State Engineer - iWATERS database; Visual inspection (certification) of the proposed site	☐ Yes ☑ No					
Within incorporated municipal boundaries or within a defined municipal fresh water well field covered under a municipal ordinance adopted pursuant to NMSA 1978, Section 3-27-3, as amended.  - Written confirmation or verification from the municipality; Written approval obtained from the municipality	☐ Yes ☑ No					
Within 500 feet of a wetland.  - US Fish and Wildlife Wetland Identification map; Topographic map; Visual inspection (certification) of the proposed site	☐ Yes ⊠ No					
Within the area overlying a subsurface mine Written confirmation or verification or map from the NM EMNRD-Mining and Mineral Division	☐ Yes ☒ No					
<ul> <li>Within an unstable area.</li> <li>Engineering measures incorporated into the design; NM Bureau of Geology &amp; Mineral Resources; USGS; NM Geological Society; Topographic map</li> </ul>	☐ Yes ☑ No					
Within a 100-year floodplain FEMA map	☐ Yes ⊠ No					
On-Site Closure Plan Checklist: (19.15.17.13 NMAC) Instructions: Each of the following items must be attached to the closure plans a check mark in the box, that the documents are attached.  Siting Criteria Compliance Demonstrations - based upon the appropriate requirements of 19.15.17.10 NMAC  Proof of Surface Owner Notice - based upon the appropriate requirements of Subsection F of 19.15.17.13 NMAC  Construction/Design Plan of Burial Trench (if applicable) based upon the appropriate requirements of 19.15.17.11 NMAC  Construction/Design Plan of Temporary Pit (for in-place burial of a drying pad) - based upon the appropriate requirements of 19.  Protocols and Procedures - based upon the appropriate requirements of 19.15.17.13 NMAC  Confirmation Sampling Plan (if applicable) - based upon the appropriate requirements of Subsection F of 19.15.17.13 NMAC  Waste Material Sampling Plan - based upon the appropriate requirements of Subsection F of 19.15.17.13 NMAC  Disposal Facility Name and Permit Number (for liquids, drilling fluids and drill cuttings or in case on-site closure standards cann Soil Cover Design - based upon the appropriate requirements of Subsection H of 19.15.17.13 NMAC	15.17.11 NMAC					
Re-vegetation Plan - based upon the appropriate requirements of Subsection I of 19.15.17.13 NMAC  Site Reclamation Plan - based upon the appropriate requirements of Subsection G of 19.15.17.13 NMAC						

C-144 Page 4 of 17 Cox Canyon #4C

Operator Application Certification:  I hereby certify that the information submitted with this application is true, accu	rate and complete to the best of my knowledge and belief
Name (Print): Michael K. Lane	Title: Sr. EH & S Specialist
Signature:	Date: 10/9/08
e-mail address: <u>myke.lane@williams.com</u>	Telephone: <u>505-634-4219</u>
OCD Approval: Permit Application (including closure plan) Closure F	Plan (only) OCD Conditions (see attachment)
OCD Representative Signature: Brandon Jamel	Approval Date:
Title: Enviro/spec	OCD Permit Number:
21. <u>Closure Report (required within 60 days of closure completion)</u> : Subsection Instructions: Operators are required to obtain an approved closure plan prior The closure report is required to be submitted to the division within 60 days of section of the form until an approved closure plan has been obtained and the c	to implementing any closure activities and submitting the closure report. the completion of the closure activities. Please do not complete this losure activities have been completed.
	Closure Completion Date:
Closure Method:  Waste Excavation and Removal On-Site Closure Method Altern If different from approved plan, please explain.	ative Closure Method
23. Closure Report Regarding Waste Removal Closure For Closed-loop Systems Instructions: Please indentify the facility or facilities for where the liquids, dri two facilities were utilized.	s That Utilize Above Ground Steel Tanks or Haul-off Bins Only: lling fluids and drill cuttings were disposed. Use attachment if more than
Disposal Facility Name:	Disposal Facility Permit Number:
Disposal Facility Name:	Disposal Facility Permit Number:
Were the closed-loop system operations and associated activities performed on one of the items below. It is not seen that the items below. It is not seen that the items below.	r in areas that will not be used for future service and operations?
Required for impacted areas which will not be used for future service and operat  Site Reclamation (Photo Documentation)  Soil Backfilling and Cover Installation  Re-vegetation Application Rates and Seeding Technique	ions:
24.	
Closure Report Attachment Checklist: Instructions: Each of the following it mark in the box, that the documents are attached.	ems must be attached to the closure report. Please indicate, by a check
☐ Proof of Closure Notice (surface owner and division)	
☐ Proof of Deed Notice (required for on-site closure) ☐ Plot Plan (for on-site closures and temporary pits)	
☐ Confirmation Sampling Analytical Results (if applicable)	
☐ Waste Material Sampling Analytical Results (required for on-site closure) ☐ Disposal Facility Name and Permit Number	
Soil Backfilling and Cover Installation	
☐ Re-vegetation Application Rates and Seeding Technique	
Site Reclamation (Photo Documentation) On-site Closure Location: Latitude Longi	tude NAD: □1927 □ 1983
25.	
Operator Closure Certification:  I hereby certify that the information and attachments submitted with this closure	
belief. I also certify that the closure complies with all applicable closure requirer  Name (Print):	
Signature:	
e-mail address:	Telephone:

C-144 Page 5 of 17 Cox Canyon #4C

District I PO Box 1980, Hobbs, NM 88241-1980

State of New Mexico Energy, Minerals & Natural Resources Department

Form C-102 Revised February 21, 1994
Instructions on back
Submit to Appropriate District Office
State Lease - 4 Copies
Fee Lease - 3 Copies

District II PO Drawer DD, Artesia, NM B8211-0719 District III 1000 Rio Brazos Rd., Aztec, NM 87410

OIL CONSERVATION DIVISION PO Box 2088 Santa Fe, NM 87504-2088

District IV PO Box 2088, Santa Fe, NM 87504-2088

AMENDED REPORT


## WELL LOCATION AND ACREAGE DEDICATION PLAT


'API Number	*Pool Code 72319	Pool Name : BLANCO MESAVERDE		
'Property Code		operty Name CANYON UNIT	Well Number 4C	
'0GAID No. 120782		erator Name RODUCTION COMPANY	*Elevation 6581	

<sup>10</sup> Surface Location Frmt from the North/South Lin 21 35N 11W 1685 SOUTH 1730 EAST SAN JUAN

<sup>11</sup>Bottom Hole Location If Different From Surface UL or lot no. Section <sup>12</sup> Dedicated Acres Jount or Infall Consolidation Code S Order No 320.0 Acres - (E/2)

NO ALLOWABLE WILL BE ASSIGNED TO THIS COMPLETION UNTIL ALL INTERESTS HAVE BEEN CONSOLIDATED OR A NON-STANDARD UNIT HAS BEEN APPROVED BY THE DIVISION

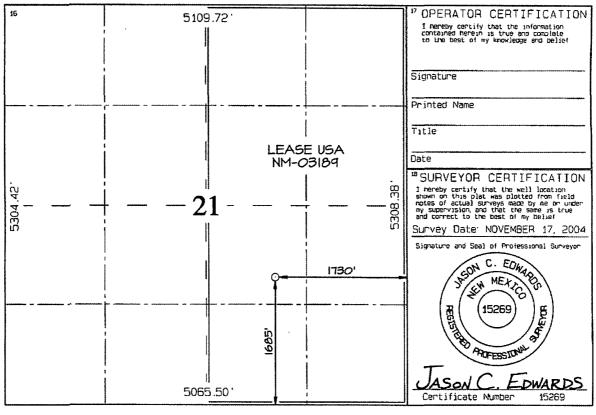

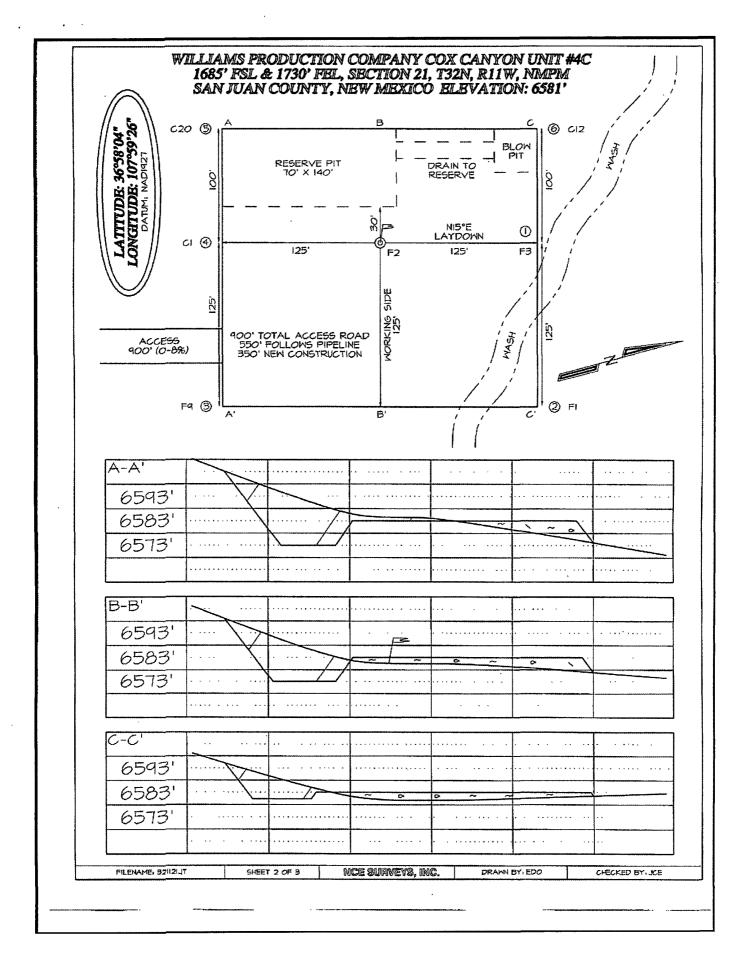

## Hydrogeological Report Williams Production Company, LLC Cox Canyon #4C Regional Hydrological Context

## **Referenced Well Location:**

The referenced well and pit is located on Bureau of Land Management (Farmington Field Office) land in San Juan County, New Mexico. This site is positioned in the northeastern portion of the San Juan Basin, an asymmetrical syncline that extends from northwestern New Mexico into southwestern Colorado (Carson National Forest DEIS, 2007). Elevation of the referenced well is approximately 6581 feet MSL.

## **General Regional Groundwater Description:**

As a portion of the San Juan Basin, this region is underlain by sandstone aquifers of the Colorado Plateau. The primary aquifer of potential concern at this location is the Unita-Animas Aquifer, composed primarily of Lower Tertiary rocks in the San Juan Basin. The aquifer consists of the San Jose Formation; the underlying Animas formation and its lateral equivalent, the Nacimiento formation; and the Ojo Alamo Sandstone. The thickness of the Unita-Animas aquifer generally increases toward the central part of the basin. In the northeastern part of the San Juan Basin, the maximum thickness of the aquifer is approximately 3500 feet (USGS, 2001). This aquifer contains fresh to moderately saline water.

Groundwater generally flows toward the San Juan River and it tributaries, where it becomes alluvial groundwater or is discharged to stream flow. Additional information regarding the Hydrogeologic setting can be found in the provided references.

### **Site Specific Information:**

Surface Hydrology: The pit is located in mid elevations on an eastern slope. There are no

drainages within 300 feet of the pit.

1st Water Bearing Formation:San Jose, TertiaryFormation Thickness:Approximately 300 ft.Underlying Formation:Nacimiento, Tertiary

**Depth to Groundwater:** Depth to groundwater is estimated at greater than 100 feet bgs. There are

no iWATERS wells with available water depth information within one mile of the pit. However, cathodic data associated with Cox Canyon 4A (approximately 1200 feet from the pit), 11 (approximately 1500 feet from

the pit), 14 (approximately 1500 feet from the pit), and 5-21

(approximately 1500 feet form the pit) shows a depth to moisture between

220 and 240 feet (see Siting Criteria Map I for details).

## **References:**

Allen, Erin. Undated. Colorado Plateau Aquifers.

http://academic.emporia.edu/schulmem/hydro/TERM%20PROJECTS/2007/Allen/Aquifer.html.

New Mexico Energy, Minerals and Natural Resources Department, Division of Mining and Minerals. Database. 2008. Internet accessed October 2008.

New Mexico Office of the State Engineer. October 2008. iWaters database. Internet accessed August 2008.

New Mexico WQCC. 2005. State of New Mexico Water Quality Act and the Water Control Commission Regulations.

United States Department of Agriculture, Forest Service. 2008. Final Environmental Impact Statement for Surface Management of Gas Leasing and Development. Jicarilla Ranger District, Carson National Forest, Rio Arriba County, New Mexico.

United States Department of the Interior. Bureau of Land Management. 2003. Final Farmington Resource Management Plan and Final Environmental Impact Statement. Farmington Field Office, Farmington, New Mexico.


United States Geological Survey. 2001. Groundwater Atlas of the United States: Arizona, Colorado, New Mexico and Utah. USGS Publication HA 730-C; http://capp.water.usgs.gov.

## New Mexico Office of the State Engineer POD Reports and Downloads


To	ownship:	32N Rang	ge: 11W	Sections:		***************************************			
· NAD	027 X:	Y:		Zone:	Í	Search I	Radius:		
County:	<b>[</b> -	Basin:			<b>X</b>	Number:		Suffix:	
Owner Name: (F	rirst)		(Last)	OFFICE AND	o No	n-Domes	tic O	Domestic (	All
,	POD / Su	rface Data R	ReportAvg I	Depth to Wa	ter ReportWa	ter Colu	nn Report		
	POD / Su	rface Data R	ReportAvg I	Depth to Wa	ter ReportWa	ter Colui	nn Report		
•	POD / Su	rface Data R	ReportAvg I	Depth to Wa	ter ReportWa	nter Colui	nn Report		
	POD / Su	rface Data R	ReportAvg I	Depth to Wa	ter ReportWa	iter Colui	nn Report		
	POD / Su	rface Data R		·					ang salah salah digunas salah sa
	POD / Su	rface Data R		·	ter ReportWa			un de monte de contra en	and the Market Control of the Contro
	n (de combañ (1804) de seus é sus é un des déceden	accond State and Commence	WATE	R COLUMN	REPORT 0				
	(quarter	s are 1=	WATEI	R COLUMN	REPORT 0		008	Depth	Water
	(quarter	accond State and Commence	WATEI	R COLUMN	REPORT 0			Depth	Water
(in feet)	(quarter	s are 1=	WATEI NW 2=NE ggest to	R COLUMN	REPORT 0		008	Depth Water	
(in feet) POD Number	(quarter	s are 1= s are bi	WATEI NW 2=NE ggest to	R COLUMN 3=SW 4=S Smalles	REPORT 0	9/18/20	Depth	-	Column
(in feet) POD Number SJ 01360	(quarter (quarter Tws	s are 1= s are bi Rng Sec	WATEI NW 2=NE ggest to	R COLUMN 3=SW 4=S Smalles	REPORT 0	9/18/20	DO8 Depth Well	Water	Column 25
(in feet) POD Number SJ 01360 SJ 01327	(quarter (quarter Tws 32N	s are 1= s are bi Rng Sec 11W 19	WATER NW 2=NE ggest to	R COLUMN 3=SW 4=S Smalles	REPORT 0	9/18/20	Depth Well 180	Water 155	Column 25
(in feet) POD Number SJ 01360 SJ 01327 SJ 00021	(quarter (quarter Tws 32N 32N	s are 1= s are bi Rng Sec 11W 19 11W 23	WATER NW 2=NE ggest to qqq 2 2 2 2 3	R COLUMN 3=SW 4=S Smalles	REPORT 0	9/18/20	Depth Well 180 90	Water 155	Column 25
	(quarter (quarter Tws 32N 32N 32N 32N	s are 1= s are bi Rng Sec 11W 19 11W 23 11W 23	WATER NW 2=NE ggest to q q q 2 2 2 2 3 3	R COLUMN 3=SW 4=8 5 smalles	REPORT 0	9/18/20	Depth Well 180 90 585	Water 155	Water Column 25 40

Record Count: 6

# Siting Criteria Map I Water Wells, Cathodic Wells, & Springs Williams Exploration and Production Company Cox Canyon 4C T32N, R11W, Section 21, NMPM San Juan County, New Mexico

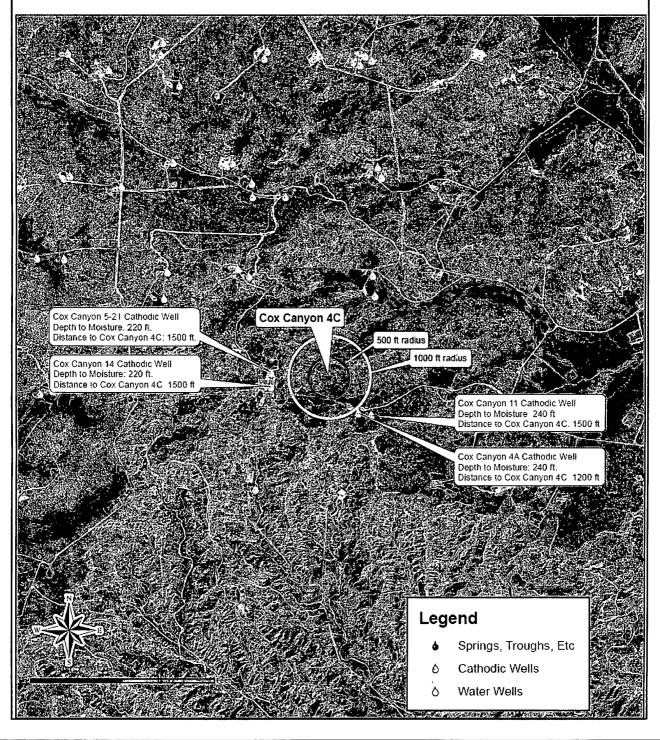

# Siting Criteria Map II Topographic Features Williams Exploration and Production Company Cox Canyon #4C T32N, R11W, Section 21, NMPM San Juan County, New Mexico

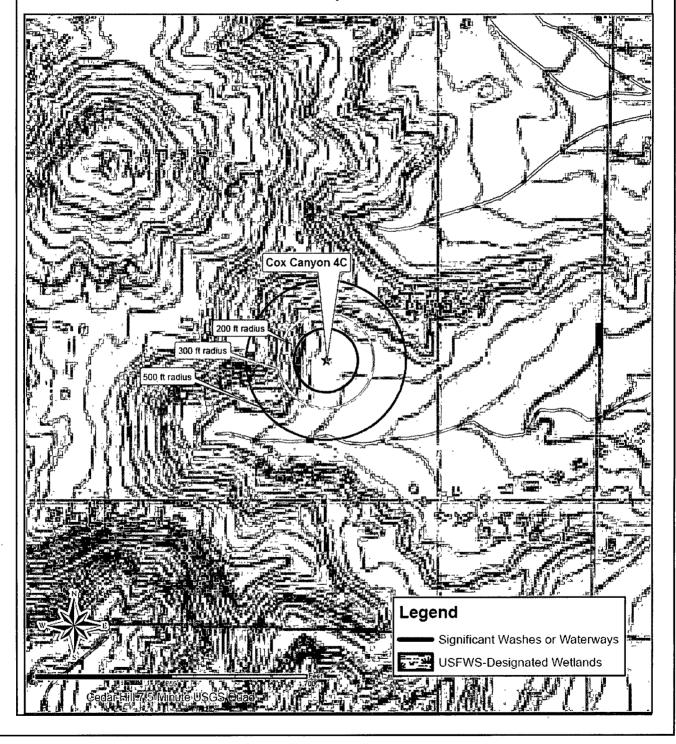


### FEMA Map - 100-Year Floodplain:


According to FEMA maps, this location is not within a 100-year floodplain (see attached FEMA map).


## **Siting Criteria Compliance Demonstrations:**

The Cox Canyon #4C pit is not located in an unstable area. The location is not situated over a mine or a steep slope (see attached New Mexico Mines, Mills, and Quarries Map). Excavated pit material will not be located within 300 feet of a continuously flowing water course; within 200 feet of any other significant water course, lakebed, sinkhole, or playa lake; or within 500 feet of any reported riparian areas or wetlands (see Siting Criteria Map II). The pit is not within 500 feet of any private, domestic fresh water well or spring or within 1000 feet of any other fresh water well or spring (see Siting Criteria Map I). The pit will not be within any incorporated municipal boundaries or defined municipal freshwater well field covered under a municipal ordinance adopted pursuant to NMSA 1978, Section 3-27-3, as amended. The location of the pit is not within 300 feet of any permanent residence, school, hospital, institution, or church.

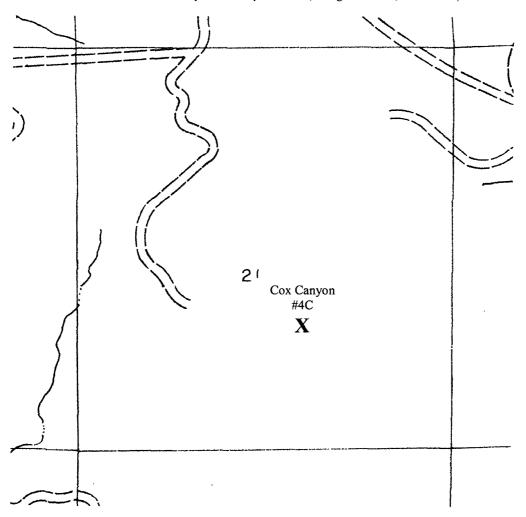

## **MMQonline Public Version**

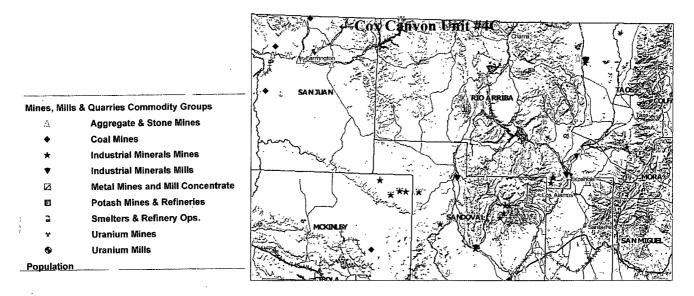





## Williams Production Co., LLC San Juan Basin: New Mexico Assets

Temporary Pit Maintenance & Operating Plan Drilling/Completion and Workover

In accordance with Rule 19.15.17 NMAC, the following plan describes the general operations and maintenance (O&M)of temporary pits on Williams Production Co, LLC (WPX) locations in the San Juan Basin of New Mexico. This is WPX's standard procedure for all temporary pits to be utilized for the drilling, completion and/or workover of oil and gas wells operated by WPX. For those temporary pits which do not conform to this standard O&M plan, a separate well specific O&M plan will be developed and utilized.

## General Plan Requirements:

- 1. WPX will operate and maintain a temporary pit to contain liquids and solids associated with drilling, completion and workover of oil and gas wells which will prevent contamination of fresh water resources and protect public health and the environment.
- 2. WPX will to the extent practical conserve drilling fluids for reuse by transferring liquids to pits ahead of the rigs. All other fluids will be disposed by evaporation or transport to Basin Disposal, Inc in Bloomfield, New Mexico (Permit # NM-01-005).
- 3. WPX shall maintain at least two (2) feet of vertical freeboard for a temporary pit.
- 4. WPX shall remove all free liquids from a temporary pit within 30 days from the date the drilling or workover rig is released.
- 5. Only fluids and solids generated during the drilling/completion/workover process may be discharged into a temporary pit. Other miscellaneous solid waste or debris will not be allowed.
- 6. WPX will not discharge or store any hazardous waste as defined under RCRA 40CFR 261 and 19.15.1.7.W(3) NMA in any temporary pit.
- 7. If any pit liner's integrity is compromised, or if any penetration of the liner occurs:
  - a. Above the liquid's surface, WPX shall repair the damage or replace the liner as necessary. WPX will notify the NMOCD Aztec District Office by phone or email within 48-hours of discovery.
  - b. Leak below the liquid's surface, WPX shall suspend operations, remove all liquids above the damaged liner within 48 hours, and repair the damage or replace the liner. WPX will notify and report to NMOCD as follows:
    - i. If the release is less than 25 bbls, the Aztec District Office by phone or email within 48-hours of discovery and repair.
    - ii. If the release is suspected to be greater than 25 bbls, the Aztec District Office and the Environmental Bureau Chief by phone for immediate verbal notification pursuant to 19.15.3.116.B (1)(d).
  - c. Written Spill/Release reports will be submitted on Form C-141 per 19.15.3.116.C NMAC within 15 days to the Aztec District Office.
- 8. The liner shall be protected from any fluid force or mechanical damage through the use of mud pit slides (secondary liner placed over the primary liner), and/or a manifold system.
- 9. Diversion ditches, around the location or around the perimeter of the pit, shall be maintained as protection from run-on.
- 10. WPX shall immediately remove any visible layer of oil from the surface of a temporary pit following cessation of drilling/completion/workover operations. Oil absorbent booms will be utilized to contain and remove oil. An oil absorbent boom will stored on-site until the pit is covered.
- 11. WPX will inspect the temporary pits as follows to ensure compliance with this plan:
  - d. Daily during drilling or workover operations. Inspections will be included with the IADC reports.
  - e. Weekly as long as liquids remain in the pit. Electronic copies of the inspections will be kept at the WPX San Juan Basin office.
  - Copies of the inspections will be filed with the NMOCD Aztec District office upon pit closure.
- 12. WPX shall remove all free liquids from a blow/flare (cavitation) pit within 48 hours after completing operations. WPX may request additional time to remove liquids from the Aztec District office if it is not feasible to meet the 48 hour requirement.

## Williams Production Co., LLC San Juan Basin: New Mexico Assets

Temporary Pit In-place Closure Plan Drilling/Completion and Workover (Groundwater >100 feet bgs)

In accordance with Rule 19.15.17.13 NMAC, the following plan describes the general in-place closure requirements of temporary pits on Williams Production Co, LLC (WPX) locations in the San Juan Basin of New Mexico. This is WPX's standard procedure for all temporary pits to be utilized for the drilling, completion and/or workovers of oil and gas wells operated by WPX. For those temporary pits which do not conform to this standard closure plan, a separate well/pit-specific closure plan will be developed and utilized.

All closure activities will include proper documentation and will be submitted to OCD within 60 days of the pit closure on a Closure Report using Division Form C-144. The Report will include the following:

- Details on Capping and Covering, where applicable
- Plot Plan (Pit Diagram)
- Inspection reports
- Sampling Results
- Division Form C-105: WELL COMPLETION OR RECOMPLETION REPORT AND LOG
- Copy of Deed Notice filed with the County Clerk (formatted to meet County requirements)

## General Plan Requirements:

- 1. All free-standing liquids will be removed from the pit at the start of the closure process. Liquids will be removed in a manner that the appropriate District Office approves including: recycled, reused, reclaimed, evaporated, and/or disposed of in a Division-approved facility. Once all free liquids are removed, the sludge will be stabilized by one of the following methods depending on equipment availability: blending with clean stockpiled soils or dewatering using a Bowl Decanter Centrifuge, then blending with clean stockpiles soils.
- 2. The preferred method of closure for all temporary pits will be on-site closure by in-place burial, provided all the criteria in 19.15.17.13.B are met.
- 3. The surface owner shall be notified of WPX's proposed closure plan using a means that provides proof of notice (i.e. certified mail/return receipt requested).
- 4. Within six months of the "rig-off" status occurring, WPX will ensure that the temporary pit is covered and recontoured, and that reseeding is in progress.
- 5. Notice of Closure will be given to the Aztec District office between 72 hours and one week of the scheduled closure via email or phone. The notification of closure will include the following:
  - g. Operator's Name (WPX)
  - h. Well Name and API Number
  - i. Location (USTR)
- 6. The pit liner shall be removed above "mud level" after stabilization. Removal of the liner will consist of manually or mechanically cutting the liner at the mud level and removing all remaining liner. Care will be taken to remove "all" of the liner (i.e. anchored material). All excessive liner will be disposed of at a licensed disposal facility (probably San Juan Regional Landfill, operated by Waste Management under NMED Permit SWM-052426).

- 7. Solidification of the remaining pit contents shall be achieved by mixing non-waste-containing, earthen material. The solidification process will be accomplished using a combination of natural drying and mechanical mixing. Pit contents will be mixed with non-waste, earthen material to a consistency that is deemed safe and stable. The mixing ratio shall not exceed 3 parts non-waste to 1 part pit contents.
- 8. A five-point composite sample will be taken of the pit using sampling tools; all samples will be tested per 19.15.17.13(B)(1)(b) NMAC. In the event that the criteria are not met (See Table 1), all contents will be handled per 19.15.17.13(B)(1)(a) (i.e. dig and haul to a Division-approved facility). Approval to haul will be requested of the Aztec District office prior to initiation.

Table 1: Closure Criteria for Temporary Pits in Non-sensitive Areas

Components	Testing Methods	Closure Limits (mg/Kg)
Benzene	EPA SW-846 Method 8021B or 8260B	0.2
BTEX	EPA SW-846 Method 8021B or 8260B	50
TPH	EPA SW-846 Method 8015 M(Full Range)*	2500
	or Method 418.1	
GRO/DRO	EPA SW-846 Method 8015M (GRO/DRO)	500
Chlorides	EPA SW-846 Method 300.1	1000

<sup>\*</sup> Preferred method

- 9. Upon completion of solidification and testing, the pit area will be backfilled with non-waste, earthen material compacted to native conditions to enable effective revegetation for successful evapotranspiration. A minimum of four feet of cover will be used, including replacement of one foot of suitable material to establish vegetation, or the background thickness of topsoil, whichever is greater.
- 10. Following cover, the site will be recontoured to meet the Surface Management Agency or surface owner requirements. Re-contouring will attempt to match fit, shape, line form, and texture of the surrounding geography. Re-shaping will provide drainage control, prevent ponding, and minimize erosion. Natural drainages will be unimpeded and stormwater Best Management Practices (BMPs) will be used to aid in soil stabilization and protect surface water quality.
- 11. Notification will be sent to the Aztec District office when the reclaimed area is seeded.
- WPX shall seed the disturbed areas the first growing season after the pit is covered. Seeding will be accomplished via drilling on the contour whenever practical, or by other Division-approved methods. Vegetative cover will equal 70% of the native perennial vegetative cover (unimpacted), consisting of at least three native plant species, including at least one grass, but not including noxious weeds. Cover will be maintained through two successive growing seasons. Repeat seeding or planting will be continued until successful vegetative growth occurs. Note: WPX assumes the seeding stipulations, including mix and seeding methods, specified by the Surface Management Agency (BLM, BOR, USFS, Tribal, etc.) or Landowner as part of a surface use agreement or APD are Division-approved methods unless notified by the Division of their unacceptability.
- 13. Upon the abandonment of all wells on the pad, the temporary pit will be located with a steel marker no less than four inches in diameter, cemented in a hole three feet deep in the center of the on site burial. The marker will be flush with the ground to allow access of the active well pad and for safety concerns. The marker will include a threaded collar to be used for future abandonment. The top of the marker will contain a welded steel 12" square plate that indicates the on site burial of the temporary pit. The plate will be easily removable and a four-foot tall riser will be threaded into the top of the collar marker and welded around the base with the operations information at the time of all wells on the pad abandoned. The information will include Operator Name, Lease Name, Well Name and number, USTR, and an indicator that the marker is an onsite pit burial location.

FM-			

DTGD.WC3		DE	DEEP TYPE GROUNDBED DATA							
HPANY:	!williams.Field.				<b></b> .			DATE: 9-15.93	· · · · · · · · · · · · · · · · · · ·	
 lt:/	Cox Canyon "4A		¥-e		• • • • •	PIPELINE:		7.73.99	• • • • • • • • • • • • • • • • • • • •	
۰۰۰۰۰ CATIO	-04.5-7лу.рал.лз N: /4 /4 sec.	 :21.T.32.11			••••	STATE:		• • • • • • • • • • • • • • • • • • • •		
GROUNDRED: DEPTH: 500 DIAME				11.16). 14	• • • • •	STATE: NEW MEDICA BACKFILL: 0 to 3/8 BACKFILL: 0 to				
i	200			igo Inne Loc	· · · · · · ˈ	Yhe	loc Sl.			
PTH	DRILLERS LOG	ļ <u>-</u>	- <b></b>			ANOOF				
ī."	DRILLERS LOG		ged	Coked	R	DEPIH	}	REMARKS		
20	Shale.		•				`			
	Shale	••••								
	Shale			•••••		·····		• • • • • • • • • • • • • • • • • • • •		
- 1	Shele	••••								
		•••••							• • • • • • • •	
}	Shale								· · · · · · · · · · · ·	
	SandStone		[		<i>.</i>					
	SANdStone		/		<b></b> .				· · · · · · · · · · · ·	
- 1	Sandstone.	\./.								
	SANdShone	.			<b>.</b>					
	Sand Stone									
120	Shale						\		<b></b> .	
130	Shale									
140	Shale						.)			
150	Shale									
160	Shale									
170	SANG Stone		••••							
180	Sandstone		••••					· · · · · · · · · · · · · · · · · · ·		
	Sand Hone						· · · · · · · · · · · · · · · · · · ·		• • • • • • • • • • • • • • • • • • • •	
500	SAnd Stone		····						•••••	
210			.7. 8				.			
220	Dring Zabing		• • • •			-				
			·.D						· · · · · · · · ·	
230	Sandstone		2.		<b> </b>					
240	SandStone		.ها.		<b> </b>		water.	5GPm	· • • • • • • • •	
250	Shale		.4	l						
260	Shale		1.1							
270	Shale			ļ						
280	Shale		 12				TACCED	Coke Beseze		
290	Shals		:. <del>:</del>					YU IS F PIPHERIO.		
	1 7				1					
	Shale									
 	Sand Stone		1.4	3.7	·¦····	20.00.				
 •••-	. Sandushale	ءَ	2.2.	14.5		ald.			· · · · · · · ·	
	SpidyShale									
	Sandyshale									
350			2.1.	4.8	.	3.5.0.				
	,	'		•	•	•	•			
NOTES	S:					<del></del>				
						<del></del>				
POWER	SOURCE: BATTERY				VOL 1	s:le	28			
INDI	TATE WATER FONE DEPTHS	240	64.	5 C	Pm	<u>,                                      </u>				
CASI	NG RUN: YES / (NO)	TYPE:				DEPIH:		CEMENTED:	YES / MO	
	_	1 so,								

WELL:	_
DATE:	_

1	DRILLERS LOG	ANOTE LOG		)G					
ETTH IT.		LOGGED I	LOKED	R	ANODE DEPTH	REMARKS	Ì		
360	Shale	1.6	3.9		360		ŀ		
	Shale	1.0				_	١,		
380	Shale	٠٠٠٠				+ 5			
390									
• • • • •	Shele	2.2							
	Sandy Shale	1.1	<i>3.3</i>		.402	• • • • • • • • • • • • • • • • • • • •	1		
410	Sandy Shale.	2.1	.4.7.		.410		į		
420	Sondushale	20	4.9	 	420		1		
430	5hro.18	1:9	48.		430.		l		
440	Shall.	2.3.	4.4.		440	 			
450	Shale	1.2	3.7		450.		1		
460	Shale	2.5.			420		1		
470	SandStone	.2.7			470				
480	SandStone	2.7	5.0		480	,	1		
490	Sandstone	Q l.	7:4.		J. 422				
500	Sandstone Sandstone						1		
510	DINGSHOVE						-		
520		· <b> </b> · · · · ·	.				-		
			.	.					
530			.				.		
540		.			.				
550									
560		1					1		
570			1						
580		· ····	· ····				1		
590		-	.				1		
600		•		·   · · · • ·		· · · · · · · · · · · · · · · · · · ·	-		
		- }		.	.		$\cdot$		
610		.					-		
620									
630		.\		.1					
640					-				
650									
660				1	-				
670							1		
680			1	- 1	į.		- 1		
	- j	1	i	- }	1		1		
670									
700	) }	!	!			!			
INTE	\$:						_ \		
1012	V								
OUPS PRINCE.							_		
	OVER SCURCE:								
	NOTICATE VATER ZONE DEPTHS								
ASING RUM: YES / NO 1YPE: DEPIN: CEMENTED: YES / NO									
501	SOLATION FLUGS SET: YES / NO IF SO, WHERE:								
01	OTAL: AMPSR					RESISTANCE:			