District P

1625 N French Dr , Hobbs, NM 88240

District II

1301 W. Grand Ave, Artesia, NM 88210

District III

1000 Rio Brazos Rd, Aztec, NM 87410

Form C-144

State of New Mexico Energy Minerals and Natural Resources

Department Oil Conservation Division 1220 South St. Francis Dr. Santa Fe, NM 87505

July 21, 2008 For temporary pits, closed-loop sytems, and below-grade tanks, submit to the appropriate NMOCD District Office

Form C-144

For permanent pits and exceptions submit to the Santa Fe

District IV 1220 S St Francis Dr., Santa Fe, NM 87505	Environmental Bureau office and provide a copy to the appropriate NMOCD District Office
. 11-	em, Below-Grade Tank, or d Permit or Closure Plan Application
Closure of a pit, closed-loop Modification to an existing	l for an existing permitted or non-permitted pit, closed-loop system,
Instructions: Please submit one application (Form C-144) per inc	dividual pit, closed-loop system, below-grade tank or alternative request
Please he advised that approval of this request does not relieve the operator	of liability should operations result in pollution of surface water, ground water or the

environment Nor does approval relieve the operator of its responsibility to compl	ly with any other applicable governmental authority's rules, regulations or ordinances
Operator: Burlington Resources Oil & Gas Company, LP	OGRID#: 14538
Address: PO Box 4289, Farmington, NM 87499	
Facility or well name: San Juan 28-6 Unit 439S	
API Number: 30-039-30303	OCD Permit Number.
U/L or Qtr/Qtr: F(SENW) Section: 29 Township: 28N	Range: 6W County: Rio Arriba
Center of Proposed Design: Latitude: 36.634727' N	Longitude: 107.493340' W NAD: 1927 X 1983
Surface Owner: X Federal State Private	Tribal Trust or Indian Allotment
2	
X Pit: Subsection F or G of 19.15.17.11 NMAC	
Temporary: X Drilling Workover	
Permanent Emergency Cavitation P&A	
X Lined Unlined Liner type: Thickness 20 m	nil X LLDPE HDPE PVC Other
X String-Reinforced	
Liner Seams X Welded X Factory Other	Volume. 4400 bbl Dimensions L 65' x W 45' x D 10'
notice of Drying Pad Above Ground Steel Tanks Haul-off Bins Lined Unlined Liner type: Thickness mil	
Liner Seams: Welded Gractory Other	
Below-grade tank: Subsection I of 19.15.17.11 NMAC Volume:	Other I LLDPE HDPE PVD Other RECEIVE WOV 2005 iner, 6-inch lift and automatic overflow shut-off
	Other
Alternative Method:	
Submittal of an exception request is required. Exceptions must be submitted	to the Santa Re Environmental Bureau office for consideration of approval.

Fencing: Subsection D of 19.15.17.11 NMAC (Applies to permanent pit, temporary pits, and below-grade tanks)						
Felicing: Subsection D of 19.13.17.11 NMAC (Applies to permanent pit, temporary pits, and below-grade tanks)						
Chain link, six feet in height, two strands of barbed wire at top (Required if located within 1000 feet of a permanent residence, school, hospital, institution or church)						
Four foot height, four strands of barbed wire evenly spaced between one and four feet						
Alternate. Please specify 4' hogwire fence with a single strand of barbed wire on top.						
7						
Netting: Subsection E of 19.15.17.11 NMAC (Applies to permanent pits and permanent open top tanks)						
Screen Netting Other Monthly inspections (If netting or screening is not physically feasible)						
Signs: Subsection C of 19.15 17.11 NMAC						
12" X 24", 2" lettering, providing Operator's name, site location, and emergency telephone numbers						
X Signed in compliance with 19.15.3 103 NMAC						
9						
Administrative Approvals and Exceptions:						
Justifications and/or demonstrations of equivalency are required. Please refer to 19 15 17 NMAC for guidance.						
Please check a box if one or more of the following is requested, if not leave blank:						
Administrative approval(s): Requests must be submitted to the appropriate division district of the Santa Fe Environmental Bureau office for cons (Fencing/BGT Liner)	ideration of ap	proval.				
Exception(s): Requests must be submitted to the Santa Fe Environmental Bureau office for consideration of approval.						
10						
Siting Criteria (regarding permitting): 19.15.17.10 NMAC Instructions: The applicant must demonstrate compliance for each siting criteria below in the application. Recommendations of acceptable source material are provided below. Requests regarding changes to certain siting criteria may require administrative approval from the appropriate district office or may be considered an exception which must be submitted to the Santa Fe Environmental Bureau Office for consideration of approval. Applicant must attach justification for request. Please refer to 19.15.17.10 NMAC for guidance. Siting criteria does not apply to drying pads or above grade-tanks associated with a closed-loop system.						
Ground water is less than 50 feet below the bottom of the temporary pit, permanent pit, or below-grade tank. - NM Office of the State Engineer - iWATERS database search; USGS; Data obtained from nearby wells	Ground water is less than 50 feet below the bottom of the temporary pit, permanent pit, or below-grade tank.					
Within 300 feet of a continuously flowing watercourse, or 200 feet of any other watercourse, lakebed, sinkhole, or playa lake (measured from the ordinary high-water mark). - Topographic map; Visual inspection (certification) of the proposed site	Yes	No				
Within 300 feet from a permanent residence, school, hospital, institution, or church in existence at the time of initial application.	Yes	No				
(Applies to temporary, emergency, or cavitation pits and below-grade tanks)	□NA					
- Visual inspection (certification) of the proposed site; Aerial photo; Satellite image						
Within 1000 feet from a permanent residence, school, hospital, institution, or church in existence at the time of initial application.	Yes	No				
(Applied to permanent pits)	■NA					
- Visual inspection (certification) of the proposed site; Aerial photo; Satellite image	 					
Within 500 horizonal feet of a private, domestic fresh water well or spring that less than five households use for domestic or stock watering purposes, or within 1000 horizontal feet of any other fresh water well or spring, in existence at the time of initial application.						
- NM Office of the State Engineer - iWATERS database search; Visual inspection (certification) of the proposed site.						
Within incorporated municipal boundaries or within a defined municipal fresh water well field covered under a municipal ordinance adopted pursuant to NMSA 1978, Section 3-27-3, as amended						
- Written confirmation or verification from the municipality; Written approval obtained from the municipality Within 500 feet of a wetland. Yes No						
- US Fish and Wildlife Wetland Identification map; Topographic map; Visual inspection (certification) of the proposed site Within the area overlying a subsurface mine. Written confirmation or workfaction or man from the NIM FINISD. Mining and Mineral Division.						
- Written confirmation or verification or map from the NM EMNRD - Mining and Mineral Division Within an unstable area.	∏Yes	□No				
- Engineering measures incorporated into the design; NM Bureau of Geology & Mineral Resources; USGS; NM Geological Society; Topographic map	L					
Within a 100-year floodplain - FEMA map						

Form C-144 Oil Conservation Division Page 2 of 5

Temporary Pits, Emergency Pits and Below-grade Tanks Permit Application Attachment Checklist: Subsection B of 19 15.17.9 NMAC							
Instructions: Each of the following items must be attached to the application Please indicate, by a check mark in the box, that the documents are attached							
Hydrogeologic Report (Below-grade Tanks) - based upon the requirements of Paragraph (4) of Subsection B of 19.15 17.9 NMAC Hydrogeologic Data (Temporary and Emergency Pits) - based upon the requirements of Paragraph (2) of Subsection B of 19 15.17 9							
Siting Criteria Compliance Demonstrations - based upon the appropriate requirements of 19.15.17.10 NMAC							
Design Plan - based upon the appropriate requirements of 19.15.17.10 NMAC							
Operating and Maintenance Plan - based upon the appropriate requirements of 19 15.17.12 NMAC							
Closure Plan (Please complete Boxes 14 through 18, if applicable) - based upon the appropriate requirements of Subsection C of 19.15 17.9 NMAC and 19.15.17 13 NMAC							
Previously Approved Design (attach copy of design) API or Permit							
Closed-loop Systems Permit Application Attachment Checklist: Subsection B of 19.15.17.9 NMAC Instructions: Each of the following items must be attached to the application Please indicate, by a check mark in the box, that the documents are attached. Geologic and Hydrogeologic Data (only for on-site closure) - based upon the requirements of Paragraph (3) of Subsection B of 19.15.17.9 Siting Criteria Compliance Demonstrations (only for on-site closure) - based upon the appropriate requirements of 19.15.17.10 NMAC							
Design Plan - based upon the appropriate requirements of 19.15.17.11 NMAC							
Operating and Maintenance Plan - based upon the appropriate requirements of 19 15.17.12 NMAC							
Closure Plan (Please complete Boxes 14 through 18, if applicable) - based upon the appropriate requirements of Subsection C of 19.15 17.9 NMAC and 19.15 17.13 NMAC							
Previously Approved Design (attach copy of design) API							
Previously Approved Operating and Maintenance Plan API							
Permanent Pits Permit Application Checklist: Subsection B of 19.15 17.9 NMAC Instructions: Each of the following items must be attached to the application. Please indicate, by a check mark in the box, that the documents are attached. Hydrogeologic Report - based upon the requirements of Paragraph (I) of Subsection B of 19.15.17.9 NMAC Siting Criteria Compliance Demonstrations - based upon the appropriate requirements of 19.15 17 10 NMAC Climatological Factors Assessment Certified Engineering Design Plans - based upon the appropriate requirements of 19.15 17.11 NMAC Dike Protection and Structural Integrity Design: based upon the appropriate requirements of 19.15 17.11 NMAC Leak Detection Design - based upon the appropriate requirements of 19.15.17 11 NMAC Liner Specifications and Compatibility Assessment - based upon the appropriate requirements of 19.15.17.11 NMAC Quality Control/Quality Assurance Construction and Installation Plan Operating and Maintenance Plan - based upon the appropriate requirements of 19.15.17.12 NMAC Freeboard and Overtopping Prevention Plan - based upon the appropriate requirements of 19.15.17.11 NMAC Nuisance or Hazardous Odors, including H2S, Prevention Plan Emergency Response Plan Oil Field Waste Stream Characterization							
Monitoring and Inspection Plan							
Erosion Control Plan							
Closure Plan - based upon the appropriate requirements of Subsection C of 19.15 17.9 NMAC and 19.15.17.13 NMAC							
14							
Proposed Closure: 19.15.17.13 NMAC Instructions: Please complete the applicable boxes, Boxes 14 through 18, in regards to the proposed closure plan.							
Type: X Drilling Workover Emergency Cavitation P&A Permanent Pit Below-grade Tank Closed-loop System							
Alternative Proposed Closure Method. Waste Excavation and Removal (Below-Grade Tank)							
Waste Removal (Closed-loop systems only)							
X On-site Closure Method (only for temporary pits and closed-loop systems)							
XIn-place Burial On-site Trench							
Alternative Closure Method (Exceptions must be submitted to the Santa Fe Environmental Bureau for consideration)							
15							
Waste Excavation and Removal Closure Plan Checklist: (19.15.17.13 NMAC) Instructions: Each of the following items must be attached to the closure plan.							
Please indicate, by a check mark in the box, that the documents are attached. Protocols and Procedures - based upon the appropriate requirements of 19.15.17.13 NMAC							
Confirmation Sampling Plan (if applicable) - based upon the appropriate requirements of Subsection F of 19.15.17 13 NMAC							
Disposal Facility Name and Permit Number (for liquids, drilling fluids and drill cuttings)							
Soil Backfill and Cover Design Specifications - based upon the appropriate requirements of Subsection H of 19.15 17.13 NMAC							
Re-vegetation Plan - based upon the appropriate requirements of Subsection I of 19.15.17.13 NMAC							
Site Reclamation Plan - based upon the appropriate requirements of Subsection G of 19.15.17.13 NMAC							

Form C-144 Oil Conservation Division Page 3 of 5

Waste Removal Closure For Closed-loop Systems That Utilize Above Ground Steel	Tanks or Houl off Ring Onby (10.15.17.12 D.NIMAC)					
Instructions Please identify the facility or facilities for the disposal of liquids, drilling f are required.	luids and drill cuttings Use attachment if more than two fa	cilities				
Disposal Facility Name:	Disposal Facility Permit #:					
	Disposal Facility Permit #:					
Will any of the proposed closed-loop system operations and associated activities occur on or in areas that will not be used for future service and operations? Yes (If yes, please provide the information No						
Required for impacted areas which will not be used for future service and operations: Soil Backfill and Cover Design Specification - based upon the appropriat Re-vegetation Plan - based upon the appropriate requirements of Subsect Site Reclamation Plan - based upon the appropriate requirements of Subsect	ion I of 19.15.17.13 NMAC	;				
17						
Siting Criteria (Regarding on-site closure methods only: 19.15.17.10 NMAC Instructions: Each siting criteria requires a demonstration of compliance in the closure plan Receitain string criteria may require administrative approval from the appropriate district office of for consideration of approval Justifications and/or demonstrations of equivalency are required.	r may be considered an exception which must be submitted to the 2					
Ground water is less than 50 feet below the bottom of the buried waste. - NM Office of the State Engineer - iWATERS database search, USGS. Data obtain	ned from nearby wells	Yes XNo				
Ground water is between 50 and 100 feet below the bottom of the buried waste		Yes X No				
- NM Office of the State Engineer - tWATERS database search; USGS; Data obtain	ned from nearby wells	□N/A				
Ground water is more than 100 feet below the bottom of the buried waste.		X Yes No				
- NM Office of the State Engineer - 1WATERS database search; USGS; Data obtain	ned from nearby wells	□ N/A				
Within 300 feet of a continuously flowing watercourse, or 200 feet of any other significations (measured from the ordinary high-water mark).	ant watercourse or lakebed, sinkhole, or playa lake	Yes X No				
- Topographic map; Visual inspection (certification) of the proposed site	with the state of	Yes X No				
Within 300 feet from a permanent residence, school, hospital, institution, or church in e - Visual inspection (certification) of the proposed site; Aerial photo; satellite image	Yes X No					
Within 500 horizontal feet of a private, domestic fresh water well or spring that less than purposes, or within 1000 horizontal fee of any other fresh water well or spring, in existe - NM Office of the State Engineer - iWATERS database; Visual inspection (certification)	nce at the time of the initial application atton) of the proposed site					
 Within incorporated municipal boundaries or within a defined municipal fresh water we pursuant to NMSA 1978, Section 3-27-3, as amended. Written confirmation or verification from the municipality, Written approval obta 		Yes XNo				
Within 500 feet of a wetland US Fish and Wildlife Wetland Identification map, Topographic map, Visual inspe		Yes XNo				
Within the area overlying a subsurface mine. - Written confirantion or verification or map from the NM EMNRD-Mining and M	ineral Division	Yes X No				
Within an unstable area. - Engineering measures incorporated into the design; NM Bureau of Geology & Mil		Yes X No				
Topographic map	icial Resources, OSGS, 1414 Geological Society,					
Withm a 100-year floodplain - FEMA map		Yes X No				
On-Site Closure Plan Checklist: (19.15.17.13 NMAC) Instructions: Each of the following items must bee attached to the closure plan. Please indicate, by a check mark in the box, that the documents are attached.						
X Siting Criteria Compliance Demonstrations - based upon the appropriate	requirements of 19.15 17.10 NMAC					
Troof of Surface Owner Notice - based upon the appropriate requirements of Subsection F of 19.15.17.13 NMAC						
Construction/Design Plan of Burial Trench (if applicable) based upon the appropriate requirements of 19.15.17.11 NMAC						
Construction/Design Plan of Temporary Pit (for in place burial of a dryin	g pad) - based upon the appropriate requirements of 19	9.15.17.11 NMAC				
X Protocols and Procedures - based upon the appropriate requirements of 1	9.15.17.13 NMAC					
Confirmation Sampling Plan (if applicable) - based upon the appropriate						
X Waste Material Sampling Plan - based upon the appropriate requirement	s of Subsection F of 19 15 17 13 NMAC					
X Disposal Facility Name and Permit Number (for liquids, drilling fluids an	•	not be achieved)				
X Soil Cover Design - based upon the appropriate requirements of Subsection						
X Re-vegetation Plan - based upon the appropriate requirements of Subsection I of 19.15.17.13 NMAC X Site Reclamation Plan - based upon the appropriate requirements of Subsection G of 19.15.17.13 NMAC						

19	
Operator Application Certification: I hereby certify that the information submitted with this application is true, accurate and	d complete to the best of my knowledge and belief
	Title: Regulatory Technician
	Date 11/7/08
	Celephone: 505-326-9837
20 OCD Approval: Permit Application (including closure plan) Clos	sure Plan (only) OCD Conditions (see attachment)
OCD Representative Signature:	Approval Date: 12-10-08
Title: _ Ensiro /spec	OCD Permit Number:
21 Closure Report (required within 60 days of closure completion): Subsection K Instructions: Operators are required to obtain an approved closure plan prior to imple report is required to be submitted to the division within 60 days of the completion of the approved closure plan has been obtained and the closure activities have been complete	menting any closure activities and submitting the closure report. The closure e closure activities. Please do not complete this section of the form until an
	Closure Completion Date:
22 Closure Method: Waste Excavation and Removal On-site Closure Method Al	Iternative Closure Method
23	
Closure Report Regarding Waste Removal Closure For Closed-loop Systems That Instructions: Please identify the facility or facilities for where the liquids, drilling flu	
were utilized. Disposal Facility Name.	Disposal Facility Permit Number:
-	Disposal Facility Permit Number:
Were the closed-loop system operations and associated activities performed on or in	•
Yes (If yes, please demonstrate compliane to the items below)	A.
Required for impacted areas which will not be used for future service and operation	2.5
Site Reclamation (Photo Documentation)	
Soil Backfilling and Cover Installation Re-vegetation Application Rates and Seeding Technique	
Closure Report Attachment Checklist: Instructions: Each of the following is the box, that the documents are attached.	tems must be attached to the closure report. Please indicate, by a check mark in
Proof of Closure Notice (surface owner and division)	
Proof of Deed Notice (required for on-site closure)	•
Plot Plan (for on-site closures and temporary pits) Confirmation Sampling Analytical Results (if applicable)	
Confirmation Sampling Analytical Results (if applicable) Waste Material Sampling Analytical Results (if applicable)	
Disposal Facility Name and Permit Number	
Soil Backfilling and Cover Installation	
Re-vegetation Application Rates and Seeding Technique	
Site Reclamation (Photo Documentation)	
On-site Closure Location: Latitude:Lo	ongitude:NAD
25	
Operator Closure Certification: I hereby certify that the information and attachments submitted with this closure report the closure complies with all applicable closure requirements and conditions specified	t is ture, accurate and complete to the best of my knowledge and belief. I also certify that in the approved closure plan.
Name (Print):	Title
Signature:	Date ⁻
e-mail address:	Telephone:

New Mexico Office of the State Engineer POD Reports and Downloads


Township:	28N Range: 06W	Sections:	. 1		
NAD27 X:	Y::	Zone:	Search Radius:		
County:	Basin:		Number:	Suffix:	
Owner Name: (First)	(I	Last) ② All	ONon-Domestic	ODomestic	
POE	D / Surface Data Repo	ort	Depth to Water Report		
Clear Form iWATERS Menu Help					

WATER COLUMN REPORT 11/06/2008

(quarters are 1=NW 2=NE 3=SW 4=SE)

		(quarter:	s are	e bi	gg	est	: to	smal	lest)		Depth	Depth	Wat∈
POI	Number	Tws	Rng	Sec	đ	đ	q	Zone	· X	Y	Well	Water	Colum
SJ	03700 POD1	28N	06W	12	2	2	4				450	200	25
SJ	03675	28N	06W	14	4	3	4	С	153167	2059732	420	100	32
SJ	03700	28N	06W	21	2	4	4				450	200	25
SJ	03043	28N	06W	21	4	2	2				290	240	Ē
SJ	03005	28N	06W	21	4	2	2				245	175	7
SJ	03443	28N	06W	22	3	3	3				300		
SJ	00200	28N	06W	23	3	3				and the same of th	1551		
SJ	03091	2·8N-	-06W-	2.9	2	2	3				1-50	9.0	

Record Count: 8

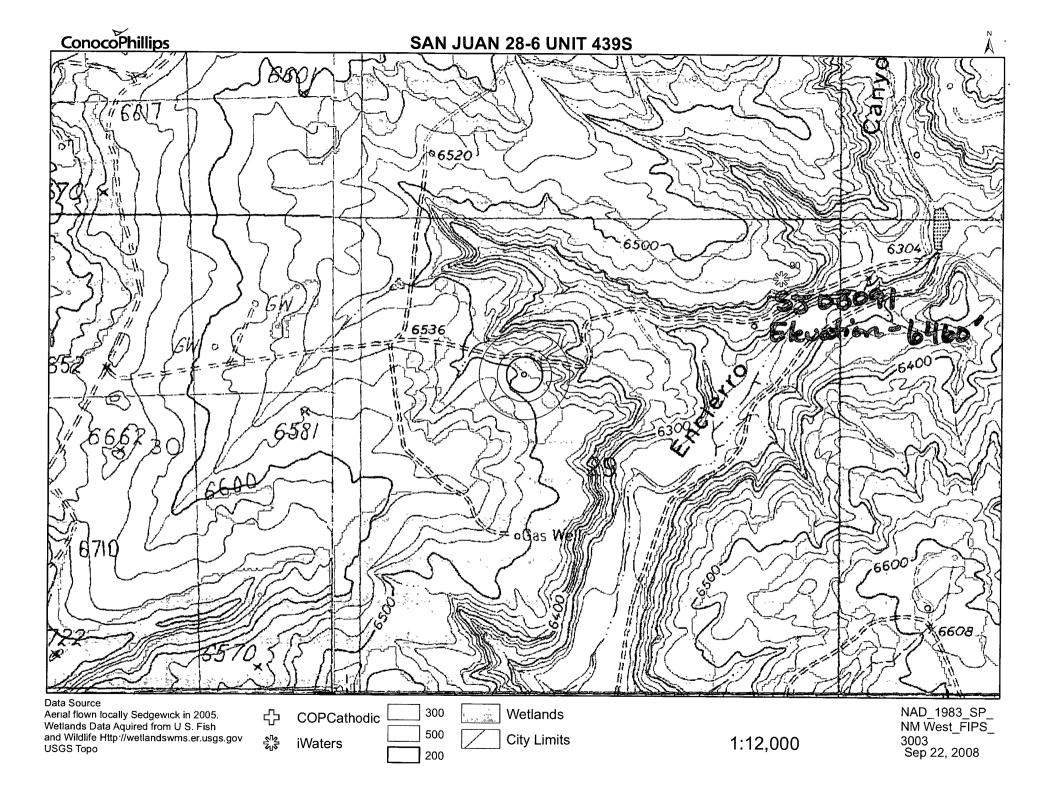

Aerial flown locally Sedgewick in 2005.
Wetlands Data Aquired from U.S. Fish
and Wildlife Http://wetlandswms er.usgs.gov
USGS Topo


1000


City Limits

0 275 550 1,100 650 2,200 Feet

3003 Sep 23, 2008 1:12,000


San Juan 28-6 Unit 439S Mines, Mills and Quarries Web Map

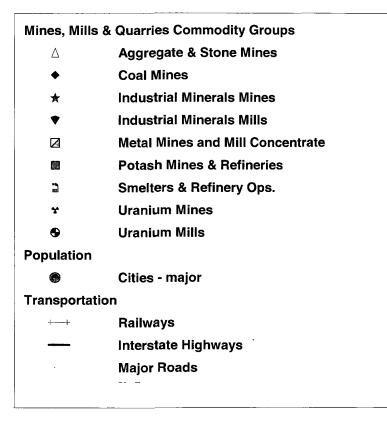

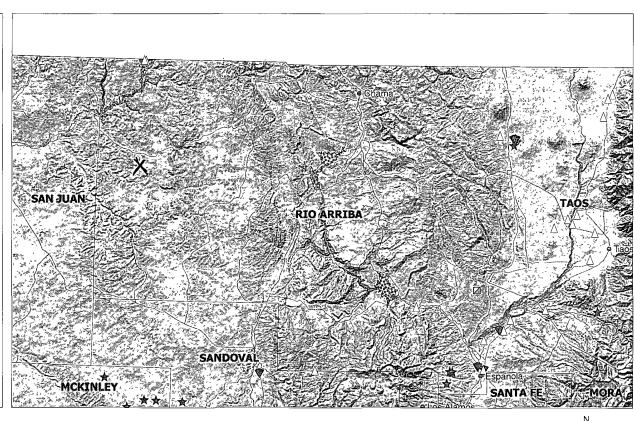





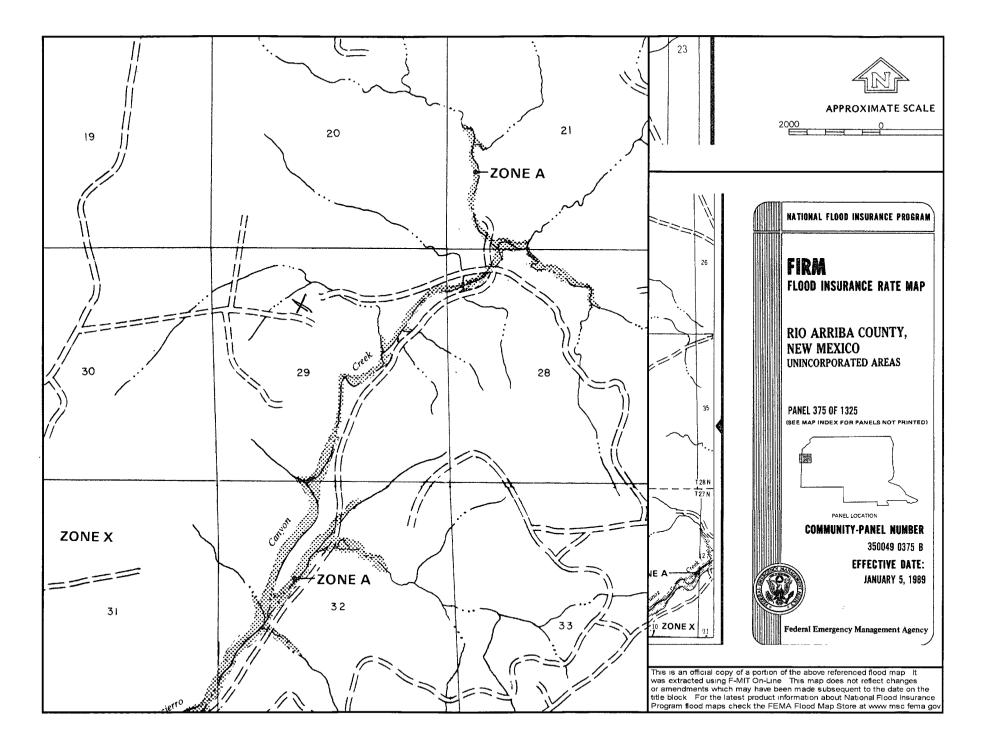

Hydrogeological report for San Juan 28-6 Unit 439S

Regional Hydrogeological context:

The San Jose Formation of Eocene age occurs in New Mexico and Colorado, and its outcrop forms the land surface over much of the eastern half of the central basin. It overlies the Nacimiento Formation in the area generally south of the Colorado-New Mexico State line and overlies the Animas Formation in the area generally north of the State line.

The San Jose Formation was deposited in various fluvial-type environments. In general, the unit consists of an interbedded sequence of sandstone, siltstone, and variegated shale. Thickness of the San Jose Formation generally increases from west to east (200 feet in the west and south to almost 2,700 feet in the center of the structural basin). Ground water is associated with alluvial and fluvial sandstone aquifers. Thus, the occurrence of ground water is mainly controlled by the distribution of sandstone in the formation. The distribution of such sandstone is the result of original depositional extent plus any post-depositional modifications, namely erosion and structural deformation. Transmissivity data for San Jose Formation are minimal. Values of 40 and 120 feet squared per day were determined from two aquifer tests (Stone et al, 1983, table 5). The reported or measured discharge from 46 water wells completed in San Jose Formation ranges from 0.15 to 61 gallons per minute and the median is 5 gallons per minute. Most of the wells provide water for livestock and domestic use.

The San Jose Formation is a very suitable unit for recharge from precipitation because soils that form on the unit are sandy and highly permeable and therefore readily adsorb precipitation. However, low annual precipitation, relatively high transpiration and evaporation rates, and deep dissection of the San Jose Formation by the San Juan River and its tributaries all tend to reduce the effective recharge to the unit.

Stone et al., 1983, Hydrogeology and Water Resources of the San Juan Basin, New Mexico: Socorro, New Mexico Bureau of Mines and Mineral Resources Hydrologic Report 6, 70 p.

Siting Criteria Compliance Demonstration & Hydro Geologic Analysis

The San Juan 28-6 Unit 439S is not located in an unstable area. The location is not over a mine and is not on the side of a hill as indicated on the Mines, Mills and Quarries Map and Topographic Map. The location of the excavated pit material will not be located within 300' of any continuously flowing watercourse or 200' from any other watercourse as indicated on the Topographic Map. The location is not within a 100-year floodplain area as indicated on the FEMA Map. The subject well has an elevation of 6491'. The iWATERS data point is located in section 29 and is SJ03091 with an approximate elevation of 6460' and a depth to groundwater of 90' as indicated on the TOPO Map. The data provides the indication that groundwater depth is greater than 100'. The hydro geologic analysis indicates the groundwater depth and the San Jose formation will create a stable area for this new location.

Tafoya, Crystal

From:

Sent:

Tafoya, Crystal Friday, November 07, 2008 9:56 AM

To:

'mark_kelly@nm.blm.gov'

Subject:

Surface Owner Notification

The following well locations temporary pit will be closed on-site. Please let me know if you have any questions.

San Juan 31-6 Unit 33N Mudge B 100 San Juan 30-5 Unit 89M San Juan 27-5 Unit 128N Omler 100 San Juan 28-6 Unit 439S San Juan 28-5 Unit 74E

Thank you,

Crystal L. Tafoya Regulatory Technician ConocoPhillips Company San Juan Business Unit

Phone: (505) 326-9837

Email: Crystal.Tafoya@conocophillips.com

DISTRICT I 1825 N. French Dr., Hobbs, N.M. 88240

DISTRICT II
1301 West Grand Avenue, Artesia; N.M. 68210

DISTRICT III 1900 Rio Brazos Rd., Azteo. N.M. 87410

DISTRICT IV 1220 S. St. Francis Dr., Santa Fe, NM 87505

State of New Mexico
Energy. Minerals & Natural Appared Description 3 57
OIL CONSERVATION DIVISION Submit to

Form C-102 Revised October 12; 2005

1220 South St. Francis DrRECEIVED

Submit to Appropriate District Office

D State Lease - 4 Copies
Fee Lease - 3 Copies

Santa Fe, NM 87505 DIRECTIVED OTO FARMINGTON NM

☐ AMENDED REPORT

WELL LOCATION AND ACREAGE DEDICATION PLAT

1 API Number 30-039-30	303	Pool Code Pool Name WC: 2			
Property Code		Property Name			'Well Number
7462		SAN JUAN 28-6 UNIT			439S
OGRID No.		*Ope	⁸ Elevation		
14538		BURLINGTON RESOURCES	OIL AND GA	AS COMPANY LP	6491'

10 Surface Location UL or lot no. Township Lot Ida Section Feet from the Range North/South line Feet from the Bast/West line County 29 28-N NORTH 6-W 1780 WEST RIO ARRIBA 11 Bottom Hole Location If Different From Surface UL or lot no. Section Township Lot Idp Feet from the North/South line | Feet from the Range East/West line County Dedicated Acres " Consolidation Code Joint or lafill 15 Order No. 160 FS NW/4 320.00 FC W/2

NO ALLOWABLE WILL BE ASSIGNED TO THIS COMPLETION UNTIL ALL INTERESTS HAVE BEEN CONSOLIDATED

HIGH OF CENTES ON WELL PAID OR ACCESS ROAD VILLAGE OR PHRARMED OR UNMARMED BURIED

CONTRACTOR SHOVLD CALL ONE-CALL FOR LOCATION OF ANY MARKED OR UNMARMED BURIED


NOTE: VECTOR SHOVLD CALL ONE-CALL FOR LOCATION OF ANY MARKED OR UNMARMED BURIED

- & GAS COMPANY LP O' FNL & 1780' FWL A, RIO ARRIBA COUNTY, NI $\Theta_{\dot{q}}$ 110, ر د 2 110. Wellhead to back DIKE 150' NEW BLM ACCESS 110. EDCE OF DISTURBANCE

LATITUDE: 36' 38.0831' N LONGITUDE: 107' 29.5641' W NAD27

RESERVE PIT DIKE. TO BE 9' ABOVE DEEP SIDE (OVERFLOW - 5' WIDE AND 1' ABOVE SHALLOW SIDE).

BURLINGTON RESOURCES OIL & GAS COMPANY LP SAN JUAN 28-6 UNIT 439S, 1760' FNL & 1780' FWL SECTION 29, T-28- N, R-6-W, NMPM, RIO ARRIBA COUNTY, NM GROUND ELEVATION: 6491', DATE: MARCH 28, 2007

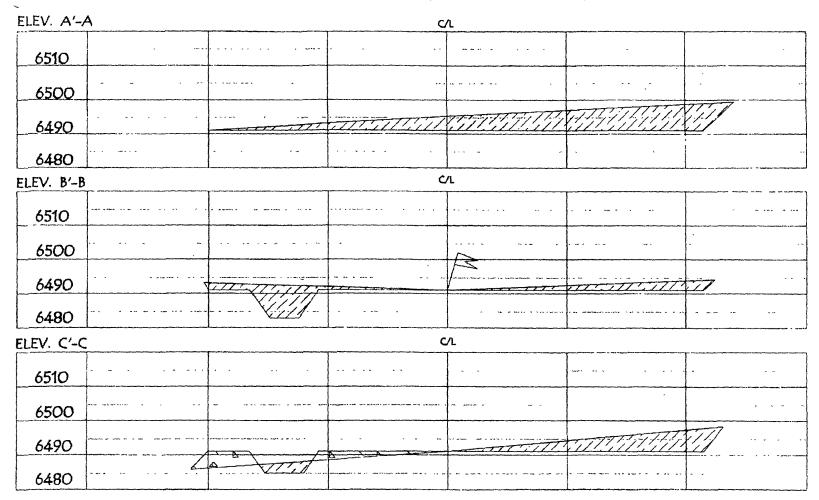

NOTE: VECTOR SURVEYS IS NOT LIABLE FOR UNDERGROUND UTILITIES OR PIPELINES.

CONTRACTOR SHOULD CALL ONE-CALL FOR LOCATION OF ANY MARKED OR UNMARKED BURIED
PIPLINES OR CABLES ON WELL PAD AND OR ACCESS ROAD AT LEAST TWO (2) WORKING DAYS PRIOR TO CONSTRUCTION.

Burlington Resources Oil & Gas Company, LP San Juan Basin Closure Plan

In accordance with Rule 19.15.17.12 NMAC the following information describes the closure requirements of temporary pits on Burlington Resources Oil & Gas Company, LP (BR) locations. This is BR's standard procedure for all temporary pits. A separate plan will be submitted for any temporary pit which does not conform to this plan.

All closure activities will include proper documentation and be available for review upon request and will be submitted to OCD within 60 days of closure of pit closure. Closure report will be filed on C-144 and incorporate the following:

- Details on Capping and Covering, where applicable.
- Plot Plan (Pit Diagram)
- Inspection Reports
- Sampling Results
- C-105
- Copy of Deed Notice will be filed with County Clerk

General Plan:

- 1. All free standing liquids will be removed at the start of the pit closure process from the pit and disposed of in a division—approved facility or recycle, reuse or reclaim the liquids in a manner that the appropriate division district office approves. The facilities to be used will be Basin Disposal (Permit #NM-01-005) and Envirotech Land Farm (Permit #NM-01-011).
- 2. The preferred method of closure for all temporary pits will be on-site burial, assuming that all the criteria listed in sub-section (B) of 19.15.17.13 are met.
- 3. The surface owner shall be notified of BR's closing of the temporary pit prior to closure as per the approved closure plan via certified mail, return receipt requested.
- 4. Within 6 months of the Rig Off status occurring BR will ensure that temporary pits are closed, re-contoured, and reseeded.
- 5. Notice of Closure will be given prior to closure to the Aztec Division office between 72 hours and one week via email, or verbally. The notification of closure will include the following:
 - i. Operator's name
 - Location by Unit Letter, Section, Township, and Range. Well name and API number.
- 6. Liner of temporary pit shall be removed above "mud level" after stabilization. Removal of liner will consist of manually or mechanically cutting liner at mud level and removing all remaining liner. Care will be taken to remove "All" of the liner i.e., edges of liner entrenched or buried. All excessive liner will be disposed of at the San Juan County Landfill located on CR 3100.
- 7. Pit contents shall be mixed with non-waste containing, earthen material in order to achieve the solidification process. The solidification process will be accomplished using a combination of natural drying and mechanically mixing. Pit contents will be mixed with non-waste, earthen material to a consistency that is deemed a safe and stable. The mixing ratio shall not exceed 3 parts clean soil to 1 part pit contents.
- 8. A five point composite sample will be taken of the pit using sampling tools and all samples tested per Subsection B of 19.15.17.13(B)(1)(b). In the event that the criteria are not met, all contents will be handled per Subparagraph (a) of Paragraph (1) of Subsection B of 19.15.17.13 i.e., Dig and haul.

Components	Tests Method	Limit (mg/Kg)
Benzene	EPA SW-846 8021B or 8260B	0.2
BTEX	EPA SW-846 8021B or 8260B	50
TPH	EPA SW-846 418.1	2500
GRO/DRO	EPA SW-846 8015M	_5Q0
Chlorides	EPA 300.1	(1000/500

- 9. Upon completion of solidification and testing standards being passed, the pit area will be backfilled with compacted, non-waste containing, earthen material. A minimum of four feet of cover shall be achieved and the cover shall include one foot of suitable material to establish vegetation at the site, or the background thickness of topsoil, whichever is greater. If standard testing fails BR will dig and haul all contents pursuant to 19.15.17.13.i.a. After doing such, confirmation sampling will be conducted to ensure a release has not occurred.
- 10. During the stabilization process if the liner is ripped by equipment the Aztec OCD office will be notified within 48 hours and the liner will be repaired if possible. If the liner can not be repaired then all contents will be excavated and removed.
- 11. Dig and Haul Material will be transported to the Envirotech Land Farm located 16 miles south of Bloomfield on Angel Peak Road, CR 7175. Permit # NM010011
- 12. Re-contouring of location will match fit, shape, line, form and texture of the surrounding. Reshaping will include drainage control, prevent ponding, and prevent erosion. Natural drainages will be unimpeded and water bars and/or silt traps will be place in areas where needed to prevent erosion on a large scale. Final re-contour shall have a uniform appearance with smooth surface, fitting the natural landscape.
- 13. Notification will be sent to OCD when the reclaimed area is seeded.
- 14. BR shall seed the disturbed areas the first growing season after the operator closes the pit. Seeding will be accomplished via drilling on the contour whenever practical or by other division-approved methods. BLM stipulated seed mixes will used on federal lands. Vegetative cover will equal 70% of the native perennial vegetative cover (un-impacted) consisting of at least three native plant species, including at least one grass, but not including noxious weeds, and maintain that cover through two successive growing seasons. Repeat seeding or planting will be continued until successful vegetative growth occurs.

Туре	Variety or Cultivator	PLS/A
Western wheatgrass	Arriba	3.0
Indian ricegrass	Paloma or Rimrock	3.0
Slender wheatgrass	San Luis	2.0
Crested wheatgrass	Hy-crest	3.0
Bottlebrush Squirreltail	Unknown	2.0
Four-wing Saltbrush	Delar	.25

Species shall be planted in pounds of pure live seed per acre: Present Pure Live Seed (PLS) = Purity X Germination/100 Two lots of seed can be compared on the basis of PLS as follows:

Source No. One (poor quality)
Purity
50 percent
Germination
Percent PLS
20 percent
Source No. two (better quality)
Purity
80 percent
Germination
63 percent
Percent PLS
50 percent

5 lb. bulk seed required to make 2 lb. bulk seed required to make

1 lb. PLS 1 lb. PLS

15. The temporary pit will be located with a steel marker, no less than four inches in diameter, cemented in a hole three feet deep in the center of the onsite burial upon the abandonment of all the wells on the pad. The marker will be flush with the ground to allow access of the active well pad and for safety concerns. The marker will include a threaded collar to be used for future abandonment. The top of the marker will contain a welded steel 12" square plate that indicates the onsite burial of the temporary pit. The plate will be easily removable and a four foot tall riser will be threaded into the top of the collar marker and welded around the base with the operator's information at the time of all wells on the pad are abandoned. The operator's information will include the following: Operator Name, Lease Name, Well Name and number, Unit Number, Section, Township, Range and an indicator that the marker is an onsite burial location.