District I
1625 N French Dr, Hobbs, NM 88240
District II
1301 W Grand Avenue, Artesia, NM 88
District III
1000 Rio Brazos Road, Aztec, NM 8741
District IV
1220 S St Francis Dr, Santa Fe, NM 87

State of New Mexico Energy Minerals and Natural Resources

For temporary pits, closed-loop systems, and below-grade tanks, submit to the appropriate NMOCD District Office.

For permanent pits and exceptions submit to the Santa Fe Environmental Bureau office and provide a copy to the appropriate NMOCD District Office.

Ostrict II 301 W Grand Avenue, Artesia, NM 88210 Ostrict III 000 Rio Brazos Road, Aztec, NM 87410 Ostrict IV 220 S St Francis Dr, Santa Fe, NM 87505	Department Oil Conservation Division 1220 South St. Francis Dr. Santa Fe. NM 87505
220 S St Francis Dr , Santa Fe, NM 87505	Santa Fe, NM 87505

Pit, Closed-Loop System, Below-Grade Tank, or Proposed Alternative Method Permit or Closure Plan Application
Type of action: Permit of a pit, closed-loop system, below-grade tank, or proposed alternative method Closure of a pit, closed-loop system, below-grade tank, or proposed alternative method
Modification to an existing permit
Closure plan only submitted for an existing permitted or non-permitted pit, closed-loop system, below-grade tank, or proposed alternative method
Instructions: Please submit one application (Form C-144) per individual pit, closed-loop system, below-grade tank or alternative request
Please be advised that approval of this request does not relieve the operator of liability should operations result in pollution of surface water, ground water or the
environment Nor does approval relieve the operator of its responsibility to comply with any other applicable governmental authority's rules, regulations or ordinances
Operator: ELM RIDGE EXPLORATION COMPANY, LLC OGRID #: 149052
Address: P. O. BOX 156, BLOOMFIELD, NM 87413
Facility or well name: BISTI GALLUP 22 #3
API Number: 30-045-34243 OCD Permit Number:
U/L or Qtr/Qtr <u>C</u> Section <u>22</u> Township <u>25 N</u> Range <u>12 W</u> County: <u>SAN JUAN</u>
Center of Proposed Design: Latitude 36.39106° N Longitude 108.10002° W NAD: ☐ 1927 ☒ 1983
Surface Owner: Federal State Tribal Trust or Indian Allotment
2.
☑ <u>Pit</u> : Subsection F or G of 19.15.17.11 NMAC
Temporary: 🛮 Drilling 🔲 Workover
☐ Permanent ☐ Emergency ☐ Cavitation ☐ P&A
☐ Lined ☐ Unlined Liner type: Thickness 20 mil ☐ LLDPE ☐ HDPE ☐ PVC ☐ Other
⊠ String-Reinforced
Liner Seams: Welded Factory Other Volume: 9,939 bbl Dimensions: L 160' x W 40' x D 10'
3. Closed-loop System: Subsection H of 19.15.17.11 NMAC
Type of Operation: P&A Drilling a new well Workover or Drilling (Applies to activities which require prior approval of a permit or notice of
intent)
☐ Drying Pad ☐ Above Ground Steel Tanks ☐ Haul-off Bins ☐ Other
Lined Unlined Liner type: Thickness mil LLDPE HDPE PVC Other
Liner Seams: Welded Factory Other
TO DEC STATE OF
Below-grade tank: Subsection I of 19.15.17.11 NMAC
Below-grade tank: Subsection I of 19.15.17.11 NMAC Volume:bbl Type of fluid
Below-grade tank: Subsection I of 19.15.17.11 NMAC Volume:bbl Type of fluid Tank Construction material:
Below-grade tank: Subsection I of 19.15.17.11 NMAC Volume:
Below-grade tank: Subsection I of 19.15.17.11 NMAC Volume:
Below-grade tank: Subsection I of 19.15.17.11 NMAC Volume:
Below-grade tank: Subsection I of 19.15.17.11 NMAC Volume:
Below-grade tank: Subsection I of 19.15.17.11 NMAC Volume:

Fencing: Subsection D of 19.15.17.11 NMAC (Applies to permanent pits, temporary pits, and below-grade tanks)	/		
Chain link, six feet in height, two strands of barbed wire at top (Required if located within 1000 feet of a permanent residence, school, hospital, institution or church)			
Four foot height, four strands of barbed wire evenly spaced between one and four feet			
Alternate. Please specify minimum 36" hog wire topped with at least 1 strand of barbed wire = at least 48" high fence			
7. Netting: Subsection E of 19.15.17.11 NMAC (Applies to permanent pits and permanent open top tanks)	-		
☐ Screen ☐ Netting ☐ Other			
Monthly inspections (If netting or screening is not physically feasible)			
8. Signs: Subsection C of 19.15.17.11 NMAC			
☐ 12"x 24", 2" lettering, providing Operator's name, site location, and emergency telephone numbers			
⊠ Signed in compliance with 19.15.3.103 NMAC			
9. Administrative Approvals and Exceptions:			
Justifications and/or demonstrations of equivalency are required. Please refer to 19.15.17 NMAC for guidance.			
Please check a box if one or more of the following is requested, if not leave blank: Administrative approval(s): Requests must be submitted to the appropriate division district or the Santa Fe Environmental Bureau	office for		
consideration of approval. See request for alternate marking on Page 2 of attachment Exception(s): Requests must be submitted to the Santa Fe Environmental Bureau office for consideration of approval.			
10.			
Siting Criteria (regarding permitting): 19.15.17.10 NMAC			
Instructions: The applicant must demonstrate compliance for each siting criteria below in the application. Recommendations of accept material are provided below. Requests regarding changes to certain siting criteria may require administrative approval from the appro-	priate district		
office or may be considered an exception which must be submitted to the Santa Fe Environmental Bureau office for consideration of a Applicant must attach justification for request. Please refer to 19.15.17.10 NMAC for guidance. Siting criteria does not apply to dry	<i>pproval.</i> ing pads or		
above-grade tanks associated with a closed-loop system.			
Ground water is less than 50 feet below the bottom of the temporary pit, permanent pit, or below-grade tank. - NM Office of the State Engineer - iWATERS database search; USGS; Data obtained from nearby wells	☐ Yes ☐ No		
Within 300 feet of a continuously flowing watercourse, or 200 feet of any other significant watercourse or lakebed, sinkhole, or playa lake (measured from the ordinary high-water mark).	☐ Yes ☐ No		
- Topographic map; Visual inspection (certification) of the proposed site			
Within 300 feet from a permanent residence, school, hospital, institution, or church in existence at the time of initial application. (Applies to temporary, emergency, or cavitation pits and below-grade tanks)	☐ Yes ☐ No ☐ NA		
- Visual inspection (certification) of the proposed site; Aerial photo; Satellite image			
Within 1000 feet from a permanent residence, school, hospital, institution, or church in existence at the time of initial application.	│		
(Applies to permanent pits) - Visual inspection (certification) of the proposed site; Aerial photo; Satellite image			
Within 500 horizontal feet of a private, domestic fresh water well or spring that less than five households use for domestic or stock	☐ Yes ☐ No		
watering purposes, or within 1000 horizontal feet of any other fresh water well or spring, in existence at the time of initial application. - NM Office of the State Engineer - iWATERS database search; Visual inspection (certification) of the proposed site			
Within incorporated municipal boundaries or within a defined municipal fresh water well field covered under a municipal ordinance	☐ Yes ☐ No		
adopted pursuant to NMSA 1978, Section 3-27-3, as amended. - Written confirmation or verification from the municipality; Written approval obtained from the municipality			
Within 500 feet of a wetland.	☐ Yes ☐ No		
- US Fish and Wildlife Wetland Identification map; Topographic map; Visual inspection (certification) of the proposed site	, , , , , , , , , , , , , , , , , , ,		
Within the area overlying a subsurface mine. - Written confirmation or verification or map from the NM EMNRD-Mining and Mineral Division	☐ Yes ☐ No		
Within an unstable area. - Engineering measures incorporated into the design; NM Bureau of Geology & Mineral Resources; USGS; NM Geological	☐ Yes ☐ No		
Society; Topographic map			
Within a 100-year floodplain FEMA map	☐ Yes ☐ No		

Temporary Pits, Emergency Pits, and Below-grade Tanks Permit Application Attachment Checklist: Subsection B of 19.15.17.9 NMAC Instructions: Each of the following items must be attached to the application. Please indicate, by a check mark in the box, that the documents are attached. Hydrogeologic Report (Below-grade Tanks) - based upon the requirements of Paragraph (4) of Subsection B of 19.15.17.9 NMAC Hydrogeologic Data (Temporary and Emergency Pits) - based upon the requirements of Paragraph (2) of Subsection B of 19.15.17.9 NMAC Siting Criteria Compliance Demonstrations - based upon the appropriate requirements of 19.15.17.10 NMAC Design Plan - based upon the appropriate requirements of 19.15.17.11 NMAC Operating and Maintenance Plan - based upon the appropriate requirements of 19.15.17.12 NMAC Closure Plan (Please complete Boxes 14 through 18, if applicable) - based upon the appropriate requirements of Subsection C of 19.15.17.9 NMAC and 19.15.17.13 NMAC					
Previously Approved Design (attach copy of design) API Number: or Permit Number:					
Closed-loop Systems Permit Application Attachment Checklist: Subsection B of 19.15.17.9 NMAC Instructions: Each of the following items must be attached to the application. Please indicate, by a check mark in the box, that the documents are attached. Geologic and Hydrogeologic Data (only for on-site closure) - based upon the requirements of Paragraph (3) of Subsection B of 19.15.17.9 Siting Criteria Compliance Demonstrations (only for on-site closure) - based upon the appropriate requirements of 19.15.17.10 NMAC Design Plan - based upon the appropriate requirements of 19.15.17.11 NMAC Operating and Maintenance Plan - based upon the appropriate requirements of 19.15.17.12 NMAC Closure Plan (Please complete Boxes 14 through 18, if applicable) - based upon the appropriate requirements of Subsection C of 19.15.17.9 NMAC and 19.15.17.13 NMAC Previously Approved Design (attach copy of design) API Number: Previously Approved Operating and Maintenance Plan API Number: (Applies only to closed-loop system that use above ground steel tanks or haul-off bins and propose to implement waste removal for closure)					
13. 13. 14. 14. 15. 17.					
Proposed Closure: 19.15.17.13 NMAC Instructions: Please complete the applicable boxes, Boxes 14 through 18, in regards to the proposed closure plan. Type: Drilling Workover Emergency Cavitation P&A Permanent Pit Below-grade Tank Closed-loop System Alternative					
□ Protocols and Procedures - based upon the appropriate requirements of 19.15.17.13 NMAC □ Confirmation Sampling Plan (ıf applicable) - based upon the appropriate requirements of Subsection F of 19.15.17.13 NMAC □ Disposal Facility Name and Permit Number (for liquids, drilling fluids and drill cuttings) □ Soil Backfill and Cover Design Specifications - based upon the appropriate requirements of Subsection H of 19.15.17.13 NMAC □ Re-vegetation Plan - based upon the appropriate requirements of Subsection G of 19.15.17.13 NMAC □ Site Reclamation Plan - based upon the appropriate requirements of Subsection G of 19.15.17.13 NMAC					

Disposal Facility Name:	two		
Disposal Facility Name:			
Yes (If yes, please provide the information below) No Re_nired for impacted areas which will not be used for future service and operations: Soil Backfill and Cover Design Specifications based upon the appropriate requirements of Subsection H of 19.15.17.13 NMAC Re-vegetation Plan - based upon the appropriate requirements of Subsection G of 19.15.17.13 NMAC Site Reclamation Plan - based upon the appropriate requirements of Subsection G of 19.15.17.13 NMAC Site Reclamation Plan - based upon the appropriate requirements of Subsection G of 19.15.17.13 NMAC			
Soil Backfill and Cover Design Specifications based upon the appropriate requirements of Subsection H of 19.15.17.13 NMAC Re-vegetation Plan - based upon the appropriate requirements of Subsection I of 19.15.17.13 NMAC Site Reclamation Plan - based upon the appropriate requirements of Subsection G of 19.15.17.13 NMAC Site Reclamation Plan - based upon the appropriate requirements of Subsection G of 19.15.17.13 NMAC Instructions: Each siting criteria requires a demonstration of compliance in the closure plan. Recommendations of acceptable source materi provided below. Requests regarding changes to certain siting criteria may require administrative approval from the appropriate district office considered an exception which must be submitted to the Santa Fe Environmental Bureau office for consideration of approval. Justifications of demonstrations of equivalency are required. Please refer to 19.15.17.10 NMAC for guidance. Ground water is less than 50 feet below the bottom of the buried waste.	perations?		
Siting Criteria (regarding on-site closure methods only): 19.15.17.10 NMAC Instructions: Each siting criteria requires a demonstration of compliance in the closure plan. Recommendations of acceptable source materix provided below. Requests regarding changes to certain siting criteria may require administrative approval from the appropriate district office considered an exception which must be submitted to the Santa Fe Environmental Bureau office for consideration of approval. Justifications of demonstrations of equivalency are required. Please refer to 19.15.17.10 NMAC for guidance. Ground water is less than 50 feet below the bottom of the buried waste. NM Office of the State Engineer - iWATERS database search; USGS; Data obtained from nearby wells Ground water is more than 100 feet below the bottom of the buried waste. NM Office of the State Engineer - iWATERS database search; USGS; Data obtained from nearby wells Ground water is more than 100 feet below the bottom of the buried waste. NM Office of the State Engineer - iWATERS database search; USGS; Data obtained from nearby wells Within 300 feet of a continuously flowing watercourse, or 200 feet of any other significant watercourse or lakebed, sinkhole, or playa lake (measured from the ordinary high-water mark). Topographic map; Visual inspection (certification) of the proposed site			
- NM Office of the State Engineer - iWATERS database search; USGS; Data obtained from nearby wells Ground water is between 50 and 100 feet below the bottom of the buried waste - NM Office of the State Engineer - iWATERS database search; USGS; Data obtained from nearby wells Ground water is more than 100 feet below the bottom of the buried waste. - NM Office of the State Engineer - iWATERS database search; USGS; Data obtained from nearby wells Yes NA Within 300 feet of a continuously flowing watercourse, or 200 feet of any other significant watercourse or lakebed, sinkhole, or playa lake (measured from the ordinary high-water mark). - Topographic map; Visual inspection (certification) of the proposed site	or may be		
- NM Office of the State Engineer - 1WATERS database search; USGS; Data obtained from nearby wells Ground water is more than 100 feet below the bottom of the buried waste. - NM Office of the State Engineer - iWATERS database search; USGS; Data obtained from nearby wells Within 300 feet of a continuously flowing watercourse, or 200 feet of any other significant watercourse or lakebed, sinkhole, or playa lake (measured from the ordinary high-water mark). - Topographic map; Visual inspection (certification) of the proposed site	⊠ No		
- NM Office of the State Engineer - iWATERS database search; USGS; Data obtained from nearby wells Within 300 feet of a continuously flowing watercourse, or 200 feet of any other significant watercourse or lakebed, sinkhole, or playa lake (measured from the ordinary high-water mark). - Topographic map; Visual inspection (certification) of the proposed site NA □ NA □ Yes			
lake (measured from the ordinary high-water mark). - Topographic map; Visual inspection (certification) of the proposed site	☐ No		
	⊠ No		
Within 300 feet from a permanent residence, school, hospital, institution, or church in existence at the time of initial application. - Visual inspection (certification) of the proposed site; Aerial photo, Satellite image	⊠ No		
Within 500 horizontal feet of a private, domestic fresh water well or spring that less than five households use for domestic or stock watering purposes, or within 1000 horizontal feet of any other fresh water well or spring, in existence at the time of initial application. - NM Office of the State Engineer - iWATERS database; Visual inspection (certification) of the proposed site	⊠ No		
Within incorporated municipal boundaries or within a defined municipal fresh water well field covered under a municipal ordinance adopted pursuant to NMSA 1978, Section 3-27-3, as amended. - Written confirmation or verification from the municipality; Written approval obtained from the municipality	⊠ No		
Within 500 feet of a wetland. - US Fish and Wildlife Wetland Identification map; Topographic map; Visual inspection (certification) of the proposed site	⊠ No		
Within the area overlying a subsurface mine. - Written confirmation or verification or map from the NM EMNRD-Mining and Mineral Division	⊠ No		
Within an unstable area. - Engineering measures incorporated into the design; NM Bureau of Geology & Mineral Resources; USGS; NM Geological Society; Topographic map	⊠ No		
Within a 100-year floodplain FEMA map	⊠ No		
On-Site Closure Plan Checklist: (19.15.17.13 NMAC) Instructions: Each of the following items must be attached to the closure plan. Pleas by a check mark in the box, that the documents are attached. Siting Criteria Compliance Demonstrations - based upon the appropriate requirements of 19.15.17.10 NMAC Proof of Surface Owner Notice - based upon the appropriate requirements of Subsection F of 19.15.17.13 NMAC See 10. on APD Page 9 Construction/Design Plan of Burial Trench (if applicable) based upon the appropriate requirements of 19.15.17.11 NMAC Construction/Design Plan of Temporary Pit (for in-place burial of a drying pad) - based upon the appropriate requirements of 19.15.17.11 NMAC Protocols and Procedures - based upon the appropriate requirements of 19.15.17.13 NMAC Confirmation Sampling Plan (if applicable) - based upon the appropriate requirements of Subsection F of 19.15.17.13 NMAC Waste Material Sampling Plan - based upon the appropriate requirements of Subsection F of 19.15.17.13 NMAC Soil Cover Design - based upon the appropriate requirements of Subsection H of 19.15.17.13 NMAC Re-vegetation Plan - based upon the appropriate requirements of Subsection I of 19.15.17.13 NMAC	(Exhibit K) NMAC		

`			
Operator Application Certification: I hereby certify that the information submitted with this application is true, accurate a	and complete to the best of my knowledge and belief.		
Name (Print) BRIAN WOOD Title: CONSULTANT			
Signature:	Date: <u>11-28-08</u>		
e-mail address: brian@permitswest.com Telephone: (505) 466-8120			
OCD Approval: Permit Application (including closure plan) Closure Plan (only) OCD Conditions (see attachment)		
OCD Representative Signature:	Approval Date: 12-10-08		
_ ,	CD Permit Number:		
Closure Report (required within 60 days of closure completion): Subsection K of 19.15.17.13 NMAC Instructions: Operators are required to obtain an approved closure plan prior to implementing any closure activities and submitting the closure report. The closure report is required to be submitted to the division within 60 days of the completion of the closure activities. Please do not complete this section of the form until an approved closure plan has been obtained and the closure activities have been completed.			
	Closure Completion Date:		
Closure Method: Waste Excavation and Removal On-Site Closure Method Alternative If different from approved plan, please explain.	Closure Method		
23. Closure Report Regarding Waste Removal Closure For Closed-loop Systems That	at Utilize Above Ground Steel Tanks or Haul-off Bins Only:		
Instructions: Please indentify the facility or facilities for where the liquids, drilling			
two facilities were utilized. Disposal Facility Name: D	isposal Facility Permit Number:		
	isposal Facility Permit Number:		
Were the closed-loop system operations and associated activities performed on or in a			
Yes (If yes, please demonstrate compliance to the items below) \(\square\$ No	,		
Required for impacted areas which will not be used for future service and operations: Site Reclamation (Photo Documentation) Soil Backfilling and Cover Installation Re-vegetation Application Rates and Seeding Technique			
Closure Report Attachment Checklist: Instructions: Each of the following items	must be attached to the closure vaport. Planse indicate by a check		
mark in the box, that the documents are attached.	must be uttached to the closure report. Flease matcate, by a check		
Proof of Closure Notice (surface owner and division) Proof of Deed Notice (required for on-site closure) Plot Plan (for on-site closures and temporary pits) Confirmation Sampling Analytical Results (if applicable) Waste Material Sampling Analytical Results (required for on-site closure) Disposal Facility Name and Permit Number Soil Backfilling and Cover Installation Re-vegetation Application Rates and Seeding Technique Site Reclamation (Photo Documentation)	` ` ` ` ` ` ` ` ` ` ` ` ` ` ` ` ` ` `		
	NAD: □1927 □ 1983		
Operator Closure Certification: I hereby certify that the information and attachments submitted with this closure report is true, accurate and complete to the best of my knowledge and belief. I also certify that the closure complies with all applicable closure requirements and conditions specified in the approved closure plan.			
Name (Print):	Title·		
Signature:	Date:		
e-mail address:	Telephone:		

Elm Ridge Exploration Company, LLC Bisti Gallup 22 #3 temporary pit proposed closure 1060' FNL & 2310' FWL Sec. 22, T. 25 N., R. 12 W. San Juan County, New Mexico API #30-045-34243

Siting Criteria

1. Ground water is >100' below the bottom of the pit. This estimate is based on the Carson well which is ≈ 2 mile ENE in 13-25n-12w and the windmill which which is ≈ 3 miles NNE in 1-25n-12w. The Carson well produces from the Cliff House and deeper zones. The windmill may produce from the Ojo Alamo.

6,406' Carson well ground elevation
- 1,927' depth to water
4.479' water elevation

6,281' windmill ground elevation
-210' depth to water
6,071' water elevation

6,398' oil well ground elevation
- 10' deep pit
- 6,071' water level

≈317' depth to water

- 2. Pit is not within 300' of a continuously flowing watercourse. Pit is not within 200' of any other significant watercourse as defined by OCD. Closest first order tributaries of Hunter Wash or West Fork Gallegos Canyon are over a mile away. (Exhibit B).
- 3. Pit is not within 300' of any building. Closest buildings are over 1-1/2 miles east (Exhibit C).
- 4. Pit is not within 1,000' any fresh water well or spring (Exhibits A & B).
- 5. Pit is not within municipal boundaries or within a municipal fresh water well field (Exhibits A & B).
- 6. Pit is not within 500' of a wetland (Exhibit D).
- 7. Pit does not overly a mine (Exhibit E).



Elm Ridge Exploration Company, LLC
Bisti Gallup 22 #3 temporary pit proposed closure
1060' FNL & 2310' FWL Sec. 22, T. 25 N., R. 12 W.
San Juan County, New Mexico
API #30-045-34243

- 8. Pit is not in an unstable area. No evidence of earth movement was found during a November 17, 2008 inspection. Maximum grade is ≈3% (Exhibit F).
- 9. Pit is not within a 100 year flood plain (Exhibit G).
- 10. C-102 is attached as Exhibit H.
- 11. Closure notice to surface owner (BLM) is attached as Exhibit I.

Alternative for 19.15.17.13 F. (1) (d)

An alternate interim marking system will be used to allow for safer and more efficient operations. A minimum 4" O. D. steel pipe will be set at least 36" deep at the center of the pit. A threaded collar will be on the top of the pipe. A minimum 12" x 12" steel plate will welded atop the threaded collar. Top of the plate will be flush with ground level. The standard location information listed will be welded onto the plate, plus a notation that it marks an on site buried temporary pit. Upon plugging the well, the plate will be removed and the pit marked as described in 19.15.17.13 F. (1) (d).

Closure Plan

Elm Ridge will close the pit in accordance with OCD Rules 19.15.17.12. & 13. Post closure documents will be submitted within 60 days of pit closure and will include forms C-105 and C-144, cover details, pit diagram, inspection report, sample results, and a copy of deed notice to the county clerk.

All free standing liquids will be removed before back filling the pit and disposed of at an Elm Ridge disposal well (e. g., Carson Unit WDW 242, API 30-045-32447) or at Basin Disposal's evaporation pond (NM-01-005).

The preferred method of closure will be on site in place burial assuming all criteria in 19.15.17.13 (B) are met.



Elm Ridge Exploration Company, LLC
Bisti Gallup 22 #3 temporary pit proposed closure
1060' FNL & 2310' FWL Sec. 22, T. 25 N., R. 12 W.
San Juan County, New Mexico
API #30-045-34243

The surface owner has been notified (attached).

Closure, including contouring and seeding, will be completed within 6 months of rig off.

After approval of this application, Elm Ridge will notify the OCD verbally or by other means at least 72 hours, but not more than one week, prior to any closure operation. The notice shall include the operator's name and the location to be closed by unit letter, section, township and range, well name & number, and API number.

All liner above the mud level will be cut and removed after stabilization. Removed liner will be disposed of in a licensed disposal facility.

Elm Ridge will stabilize or solidify the contents to a bearing capacity sufficient to support the temporary pit's final cover. Elm Ridge will not mix the contents with soil or other material at a mixing ratio of greater than 3:1, soil or other material to contents.

A 5 point composite sample will be taken of the pit and all samples tested per Subsection B of 19.15.17.13(B)(1)(b). If the criteria are not met, then all contents will be handled per Subparagraph (a) of Paragraph (1)of Subsection B of 19.15.17.13. (i. e., dig & haul). If dig & haul are required, then disposal facility will be Envirotech (NM01-0011).

<u>Component</u>	Test Method	<u>Limit (mg/Kg)</u>
benzene	EPA SW-846 8021B or 8260B	0.2
BTEX	EPA SW-846 8021B or 8260B	50
TPH	EPA SW-846 418.1	2,500
GRO/DRO	EPA SW-846 8015M	500
chlorides	EPA 300.1	1,000 or background



PAGE 4

Elm Ridge Exploration Company, LLC
Bisti Gallup 22 #3 temporary pit proposed closure
1060' FNL & 2310' FWL Sec. 22, T. 25 N., R. 12 W.
San Juan County, New Mexico
API #30-045-34243

After completing solidification and testing, the pit area will be back filled with compacted, waste free, earth material. At least 4 feet of cover will be achieved. The cover will include 1 foot of suitable material to establish vegetation at the site, or the background thickness of the topsoil, whichever is greater.

Re-contouring of the location will match the fit, shape, line, form, and texture of the surrounding area. Reshaping will control drainage and prevent ponds and erosion. Natural drainages will be unimpeded. Water bars and/or silt traps will be placed where needed to prevent erosion on a large scale. Final re-contour will have a uniform appearance with smooth surface fitting the natural landscape.

Notice will be sent to the OCD when the reclaimed area is seeded.

Disturbed areas will be seeded the first growing season after the pit is closed. Seed will be drilled on the contour wherever practical or by other OCD approved method. BLM stipulated seed mix will be used. Vegetation cover will equal at least 70% of the native perennial vegetation cover prior to disturbance. Seed mix will include at least 3 native species, including at least 1 grass. Noxious weeds will be excluded. Vegetation cover will be maintained through 2 successive growing seasons. Repeat seeding or planting will be continued until successful vegetation growth occurs.



New Mexico Office of the State Engineer POD Reports and Downloads


,	Township: 25	N Range: 12W S	ections:	-y		e e e e e e e e e e e e e e e e e e e	
NA	AD27 X:	Y:	Zone:		Search Radius:	**************************************	
County:		Basin:	E STORY STORY STORY STORY	Numb	per: Su	ıffix:	, silvan mor i
Owner Name:	(First)	(Last)	**************************************	10	Non-Domestic	ODomestic	O All
POD / Surface Data Report Avg Depth to Water Report Water Column Report							
Clear Form (iWATERS Menu Help)							

WATER COLUMN REPORT 11/27/2008

(quarters are 1=NW 2=NE 3=SW 4=SE) Water (in feet) (quarters are biggest to smallest) Depth Depth POD Number Water Column Tws Rng Sec q q q Zone Well 25N 12W 11 03 KG 70392 47 25N 12W 12 65 18 RG 47243 12W 22 40 32 25N RG 49046 8 RG 43582 25N 12W 23 50 8 42 3 3 RG 61107 25N 12W 27 С 678500 1958950 130 50 80 60 1949800 SJ 01716 25N 12W 01 3 2 403 210 193 SJ 00079 25N 12W 13 2550


Record Count: 8


EXHIBIT A

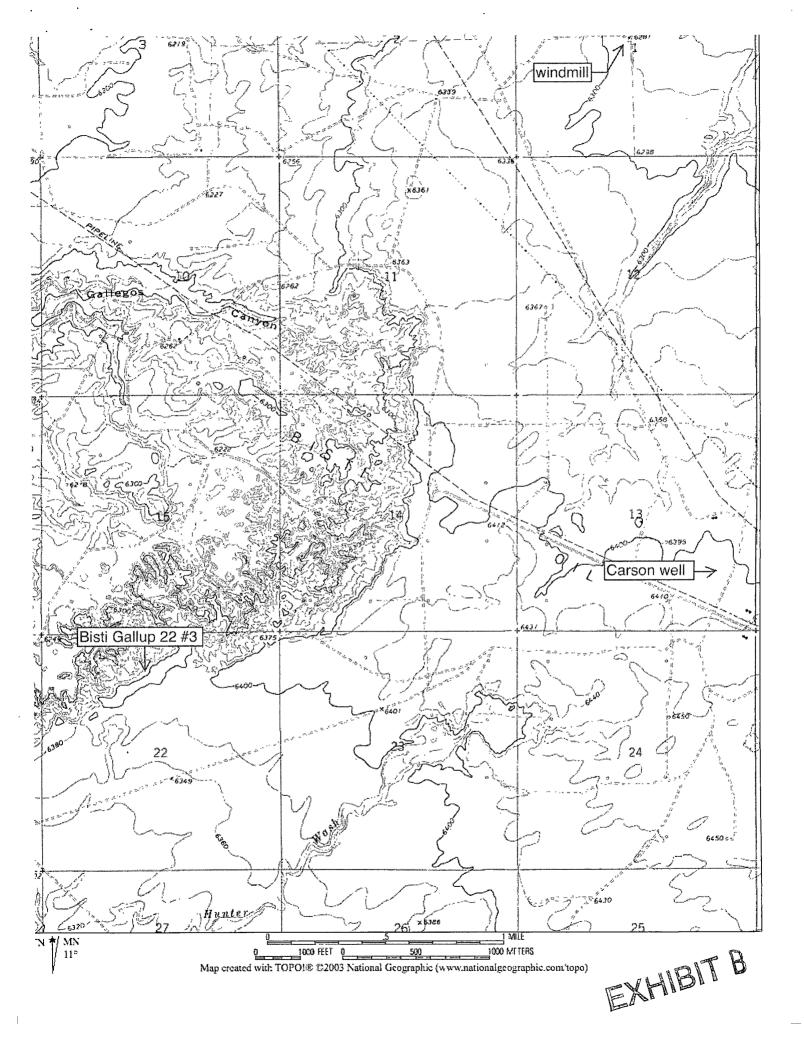


Send To Printer Back To TerraServer Change to 11x17 Print Size Show Grid Lines

Change to Landscape **SUSGS 461 km SW of Denver, Colorado, United States** 09 Oct 1997

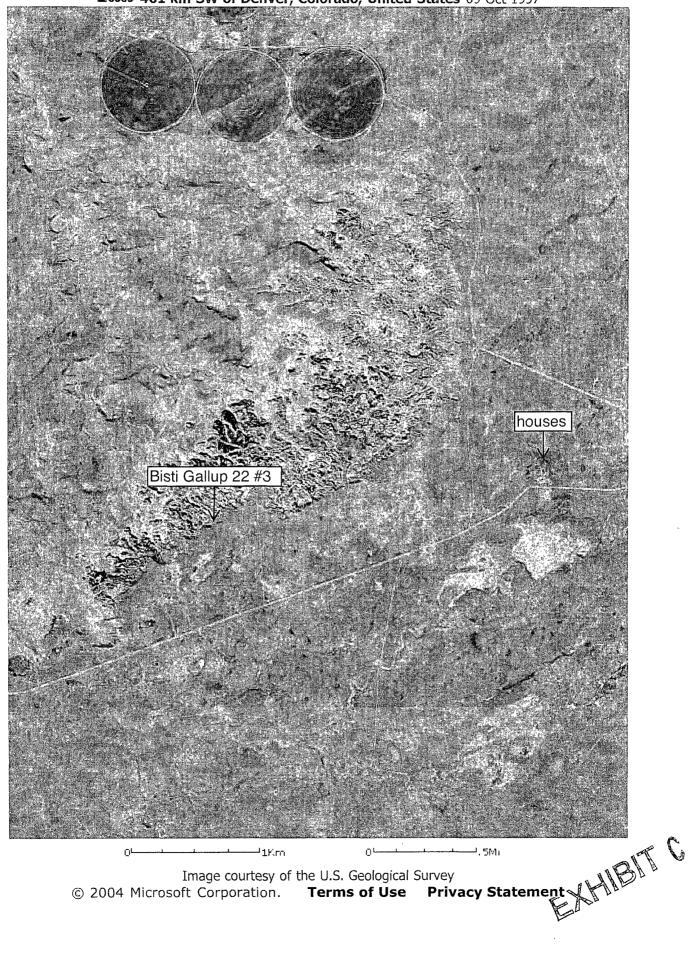

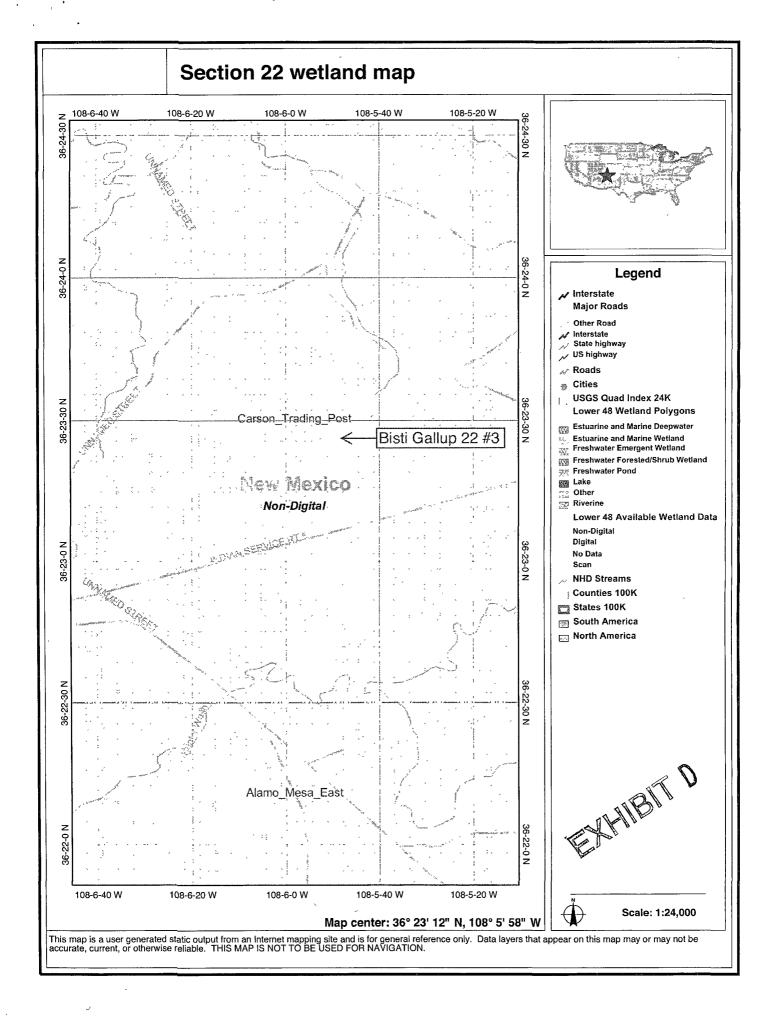


MMQonline Public Version

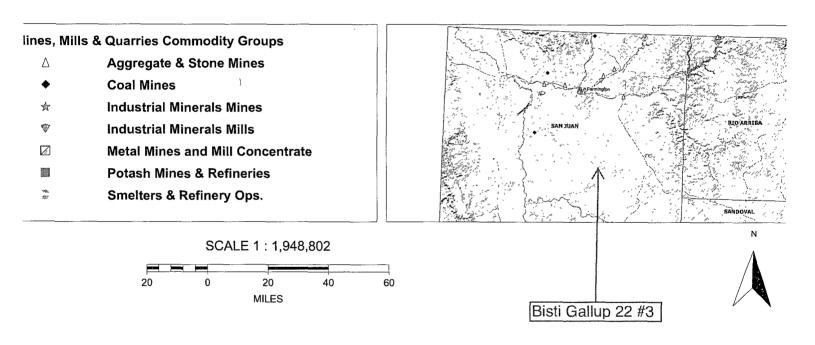

EXHIBITE

LATITUDE: 36.39101°N **ELM RIDGE EXPLORATION, LLC** LONGITUDE: 108.10000°W BISTI GALLUP 22 #3 DATUM: NAD 83 1060' FNL & 2310' FWL LOCATED IN THE NE/4 NW/4 OF SECTION 22, T25N, R12W, N.M.P.M., SAN JUAN COUNTY, NEW MEXICO GROUND ELEVATION: 6398', NAVD 88 50' 25' 25' FINISHED PAD ELEVATION: 6398', NAVD 88 SCALE = 50' 590 LF OF NEW ACCESS TO STAKED BISTI GALLUP 22 #2 WELL PAD F+2.2 F+0.4 LAYDOWN N 47°43'56" WURKING SIDE B'/ F+2.5 В F+3.3 EXHIBIT Russell Surveying 1409 W. Aztec Blvd. #5 1 FOOT CONTOUR INTERVAL SHOWN SCALE: 1" = 50" JOB No.: ERE010 DATE: 11/16/06 Aztec, New Mexico 87410 (505) 334-8637

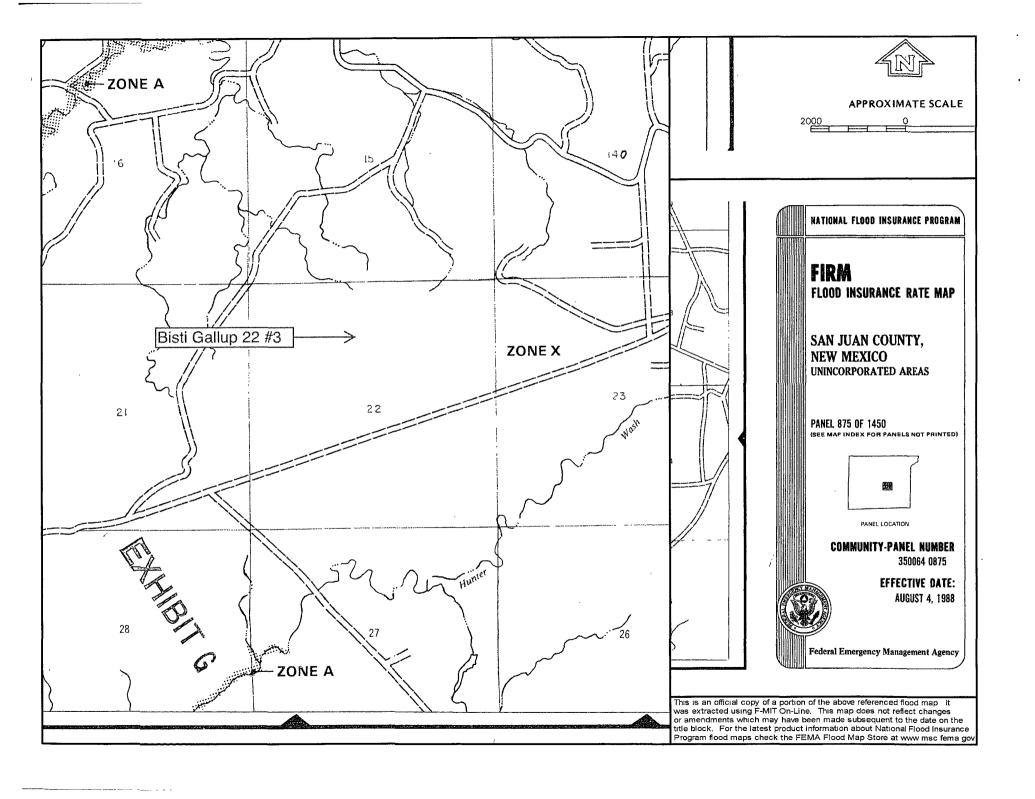

DISTRICT 1 1625 N. French Dr., Hobbs, N.M. 88240

State of New Mexico Energy, Minerals & Natural Resources Department

Form C-102 Revised August 15, 2000

DISTRICT II 611 South First, Artesia, N.M. 88210

DISTRICT III 1000 Rio Brazos Rd., Astec. N.M. 87410

DISTRICT IV 2040 South Pacheco, Santa Fe, NM 87505

OIL CONSERVATION DIVISION 2040 South Pacheco Santa Fe, NM 87505 Submit to Appropriate District Office State Lease — 4 Copies Fee Lease — 3 Copies

初 HAR 印5AMENDED REPORT

WELL LOCATION AND ACREAGE DEDICATION PLATEGERAL 5890 API Number GALDUP. 30-045-34243 BISTI LOWER -⁴Property Code ⁵Property Name 3 36290 **BISTI GALLUP 22** OGRID No. Operator Name Elevation 149052 ELM RIDGE EXPLORATION, LLC 6398 10 Surface Location UL or lot no. Section Feet from the North/South line East/West line Lot Idn Feet from the Township Rance County C 22 25N 12W 1060 **NORTH** 2310 WEST SAN JUAN ¹¹ Bottom Hole Location If Different From Surface Feet from the North/South line UL or lot no. Section Township Feet from the East/West line County RCVD MAR27107 ¹⁸ Dedicated Acres ia Joint or Infill 14 Consolidation Code 16 Order No. OIL CONS. DIV. 80 DIST. 3 NO ALLOWABLE WII pit center TO THIS COMPLETION UNTIL ALL INTERESTS HAVE BEEN CONSOLIDATED N 36.39106 DARD UNIT HAS BEEN APPROVED BY THE DIVISION W 108.10002 5270.51' (M) FND 2 1/2" BC FND 2 1/2" BC GLO 1911 OPERATOR CERTIFICATION S 89°58 5277.36' (R) GLO 1932 I hereby certify that the information contained herein is true and complete to the bast of my knowledge and LAT. 36,39101" N FONG: 108'10000, M PVI: 20'23101 M ŽE Signature **BRIAN WOOD** 5273,40' 5280.00' CONSULTANT Title MAR. 10, 2007 Date SURVEYOR CERTIFICATION EXHBITH I hereby certify that the well location shown on this plat was plotted from field notes of actual surveys made by me or under my supervision, and that the same is true and correct to the book of my belief. Z. NOVEMBER 14 2006 Date of Survey W MEX DAVID RUSSELI FND 2 1/2" BC GLO 1911 10201

From: brian wood <bri>depermitswest.com>

Subject: Elm Ridge Bisti Gallup 22 #3 on site closure notice

Date: November 28, 2008 8:26:10 AM MST To: BILL LIESS <Bill_Liess@nm.blm.gov>



As required by NMOCD pit rule Subsection F of 19.15.17.13 NMAC, I am notifying BLM as surface owner that Elm Ridge plans to close its temporary (reserve) pit using on site closure (burial) in the same pit. The well is at 1060 FNL & 2310 FWL 22-25n-12w.

The well is on lease NMNM-025449.


API # 30-045-34243

Please call me if you have any questions.


Brian Wood Permits West, Inc. 37 Verano Loop, Santa Fe, NM 87508 Phone: 505 466, 8120

Phone: 505 466-8120 FAX: 505 466-9682



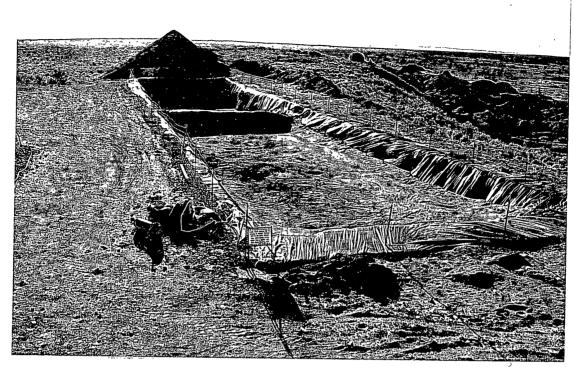

LOOKING EAST AT BISTI GALLUP 22 #3 PIT

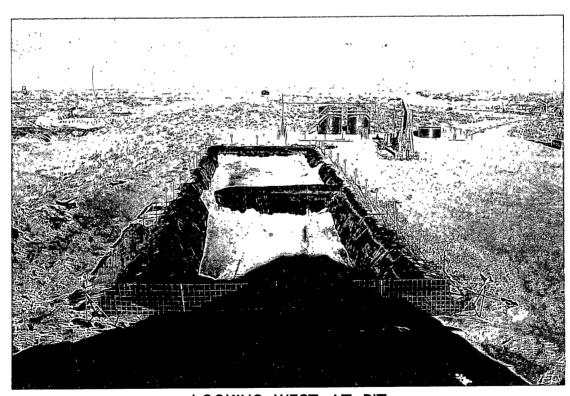

LOOKING WEST AT PIT

