

DISTRICT I
P.O. Box 1980, Hobbs, N.M. 88241-1980

DISTRICT II
1301 W. Grand Avenue, Artesia, N.M. 88210

DISTRICT III
1000 Rio Brazos Rd., Aztec, N.M. 87410

DISTRICT IV
1220 South St. Francis Dr., Santa Fe, NM 87505

State of New Mexico
Energy, Minerals & Natural Resources Department

OIL CONSERVATION DIVISION

1220 South St. Francis Dr.
Santa Fe, NM 87504-2088

Form C-102
Revised October 12, 2005
Instructions on back
Submit to Appropriate District Office
State Lease - 4 Copies
Fee Lease - 3 Copies

☐ AMENDED REPORT

"AS DRILLED"

WELL LOCATION AND ACREAGE DEDICATION PLAT

API Number 30-039-30039		Pool Code 71599	Pool Name Basin Dakota
Property Code 32660	Property Name CANYON LARGO UNIT		Well Number 489
OGUID No. 208706	Operator Name HUNTINGTON ENERGY, LLC		Elevation 6725'

10 Surface Location

UL or lot no. G	Section 18	Township 25-N	Range 6-W	Lot Idn	Feet from the 2280	North/South line NORTH	Feet from the 1920	East/West line EAST	County RIO ARriba
--------------------	---------------	------------------	--------------	---------	-----------------------	---------------------------	-----------------------	------------------------	----------------------


11 Bottom Hole Location If Different From Surface

UL or lot no. 0	Section 18	Township 25-N	Range 6-W	Lot Idn	Feet from the 672	North/South line SOUTH	Feet from the 1918	East/West line EAST	County RIO ARriba
Dedicated Acres E/2 - 320		Joint or Infill		Con. Code		Order No.			

NO ALLOWABLE WILL BE ASSIGNED TO THIS COMPLETION UNTIL ALL INTERESTS HAVE BEEN CONSOLIDATED
OR A NON-STANDARD UNIT HAS BEEN APPROVED BY THE DIVISION

LOT 1	FD 3 1/4" B.L.M. BC 1965	5 89°42'03" W 2649.51' (M)	FD 3 1/4" B.L.M. BC 1965	17
SURFACE: LAT: 36.40027° N (NAD 83) LONG: 107.50582° W (NAD 83) LAT: 36°24'00.98" N (NAD 27) LONG: 107°30'20.98" W (NAD 27)				OPERATOR CERTIFICATION I hereby certify that the information contained herein is true and complete to the best of my knowledge and belief, and that this organization either owns a working interest or unleased mineral interest in the land including the proposed bottom hole location or has a right to drill this well at this location pursuant to a contract with an owner of such a mineral or working interest, or to a voluntary pooling agreement or a compulsory pooling order heretofore entered by the division. Signature: Catherine Smith Date: 3/10/09 Printed Name: Catherine Smith
LOT 2	18			18
LOT 3	BOTTOM HOLE: LAT: 36.39411° N (NAD 83) LONG: 107.50597° W (NAD 83) LAT: 36°23'38.81" N (NAD 27) LONG: 107°30'21.51" W (NAD 27)			SURVEYOR CERTIFICATION I hereby certify that the well location shown on this plat was plotted from field notes of actual surveys made by me or under my supervision, and that the same is true and correct to the best of my belief. OCTOBER 25, 2006 Date of Survey Signature and Seal of Professional Surveyor: Certificate Number
LOT 4	S 89°23'58" W 2643.70' (M) FD. 3 1/4" BC. 1965 B.L.M.	B.H.L. 672	FD. 3 1/4" BC. 1965 B.L.M.	

TRINITY



DRILLING SYSTEMS

RCVD MAR 10 '09

OIL CONS. DIV.

DIST. 3

HUNTINGTON ENERGY

Mr. Allan McNally

Canyon Largo #489

30-039-30039

Plan vs Actual



Huntington Energy LLC Canyon Largo 489 Rio Arriba Section 18-25N-R6W



Azimuths to True North
Magnetic North: 0.00°

Magnetic Field
Strength: 0.0snT
Dip Angle: 0.00°
Date: 2009/01/21


Model: USER DEFINED

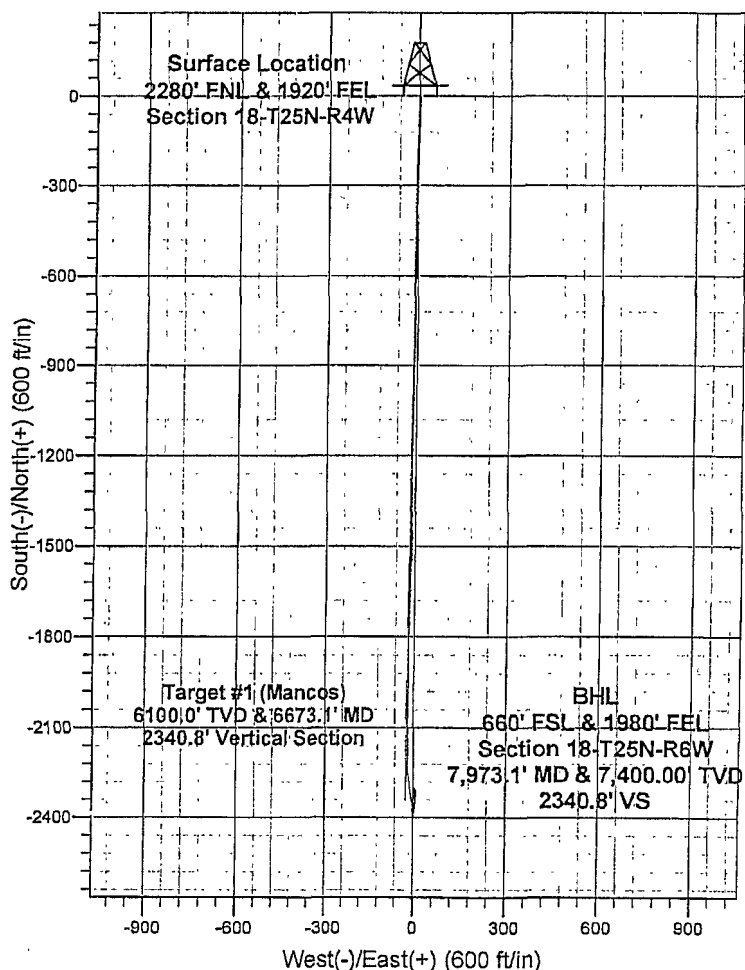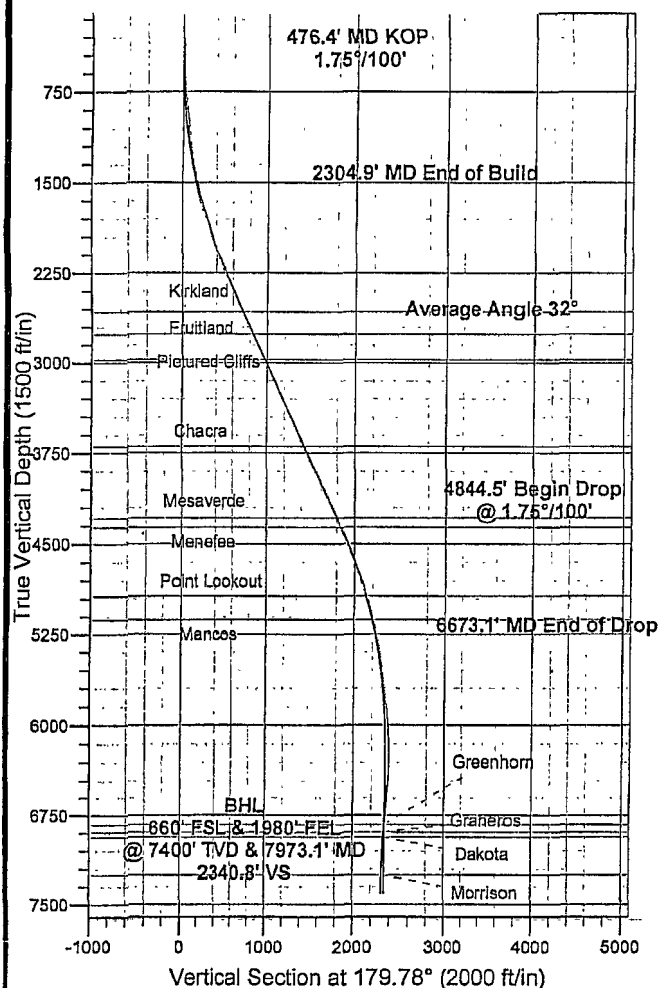

Trinity Drilling Systems

SECTION DETAILS

Sec	MD	Inc	Azi	TVD	+N-S	+E-W	DLeg	TFace	VSec	Target
1	0.0	0.00	0.00	0.0	0.0	0.0	0.00	0.00	0.0	
2	475.9	0.00	0.00	475.9	0.0	0.0	0.00	0.00	0.0	
3	2304.5	32.00	180.65	2210.9	-497.5	-5.6	1.75	180.65	497.1	
4	4844.6	32.00	180.65	4365.0	-1843.4	-20.8	0.00	0.00	1842.3	
5	6673.2	0.00	0.00	6100.0	-2340.9	-26.4	1.75	180.00	2339.4	Mancos (Target #1)
6	7973.2	0.00	0.00	7400.0	-2340.9	-26.4	0.00	0.00	2339.4	

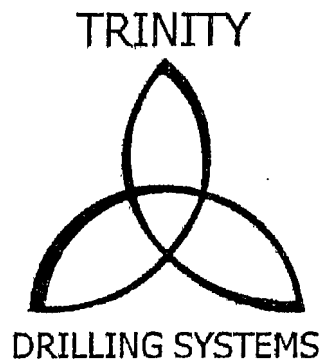

HUNTINGTON ENERGY

Mr. Allan McNally

Canyon Largo #489

Survey

Report

Huntington Energy

Canyon Largo 489

Section 18-T25N-R6W

Rio Arriba, N.M.

Wellbore #1

Survey: Survey #1

Standard Survey Report

29 January, 2009

Survey Report

Company: Huntington Energy
Project: Canyon Largo 489
Site: Section 18-T25N-R6W
Well: Rio Arriba, N.M.
Wellbore: Wellbore #1
Design: Wellbore #1

Local Co-ordinate Reference: Well Rio Arriba, N.M.
TVD Reference: WELL @ 0.0ft (Original Well Elev)
MD Reference: WELL @ 0.0ft (Original Well Elev)
North Reference: True
Survey Calculation Method: Minimum Curvature
Database: EDM 2003.21 Single User Db

Project: Canyon Largo 489

Map System: US State Plane 1927 (Exact solution)
Geo Datum: NAD 1927 (NADCON CONUS)
Map Zone: New Mexico West 3003

System Datum: Mean Sea Level

Site: Section 18-T25N-R6W

Site Position: Northing: 464.08m Latitude: 30° 59' 24.511 N
From: None Easting: 334,302.40m Longitude: 105° 55' 44.137 W
Position Uncertainty: 0.0 ft Slot Radius: in Grid Convergence: 0.98 °

Well: Rio Arriba, N.M.

Well Position: +N/-S 0.0 ft Northing: 464.08 m Latitude: 30° 59' 24.511 N
+E/-W 0.0 ft Easting: 334,302.40 m Longitude: 105° 55' 44.137 W
Position Uncertainty: 0.0 ft Wellhead Elevation: ft Ground Level: 0.0 ft

Wellbore: Wellbore #1

Magnetics	Model Name	Sample Date	Declination (°)	Dip Angle (°)	Field Strength (nT)
	User Defined	2008/10/29	10.03	63.13	50,787

Design: Wellbore #1

Audit Notes:

Version: 1.0 Phase: ACTUAL Tie On Depth: 0.0

Vertical Section:	Depth From (TVD) (ft)	+N/-S (ft)	+E/-W (ft)	Direction (°)
	0.0	0.0	0.0	180.65

Survey Program: Date 2009/01/29

From (ft)	To (ft)	Survey (Wellbore)	Tool Name	Description
420.0	7,945.0	Survey #1 (Wellbore #1)		

Survey

Measured Depth (ft)	Inclination (°)	Azimuth (°)	Vertical Depth (ft)	+N/-S (ft)	+E/-W (ft)	Vertical Section (ft)	Dogleg Rate (°/100ft)	Build Rate (°/100ft)	Turn Rate (°/100ft)
0.0	0.00	0.00	0.0	0.0	0.0	0.0	0.00	0.00	0.00
420.0	1.60	145.40	419.9	-4.8	3.3	4.8	0.38	0.38	0.00
450.0	1.50	145.40	449.9	-5.5	3.8	5.5	0.33	-0.33	0.00
481.0	2.20	170.70	480.9	-6.4	4.1	6.4	3.42	2.26	81.61
512.0	3.20	180.30	511.9	-7.9	4.2	7.8	3.53	3.23	30.97
543.0	4.20	186.00	542.8	-9.9	4.1	9.8	3.43	3.23	18.39
574.0	5.10	181.80	573.7	-12.4	3.9	12.3	3.10	2.90	-13.55
605.0	5.50	180.40	604.6	-15.2	3.9	15.2	1.36	1.29	-4.52
636.0	5.60	179.50	635.4	-18.2	3.9	18.2	0.43	0.32	-2.90
666.0	6.40	181.40	665.3	-21.4	3.8	21.3	2.75	2.67	6.33
697.0	7.00	182.50	696.1	-25.0	3.7	24.9	1.98	1.94	3.55
728.0	7.20	182.60	726.8	-28.8	3.5	28.8	0.65	0.65	0.32
759.0	7.00	182.40	757.6	-32.6	3.4	32.6	0.65	-0.65	-0.65

Survey Report

Company: Huntington Energy
Project: Canyon Largo 489
Site: Section 18-T25N-R6W
Well: Rio Arriba, N.M.
Wellbore: Wellbore #1
Design: Wellbore #1

Local Co-ordinate Reference: Well Rio Arriba, N.M.
TVD Reference: WELL @ 0.0ft (Original Well Elev)
MD Reference: WELL @ 0.0ft (Original Well Elev)
North Reference: True
Survey Calculation Method: Minimum Curvature
Database: EDM 2003.21 Single User Db

Survey

Measured Depth (ft)	Inclination (°)	Azimuth (°)	Vertical Depth (ft)	+N/-S (ft)	+E/-W (ft)	Vertical Section (ft)	Dogleg Rate (°/100ft)	Build Rate (°/100ft)	Turn Rate (°/100ft)
790.0	6.90	181.60	788.4	-36.4	3.3	36.3	0.45	-0.32	-2.58
820.0	6.90	181.60	818.1	-40.0	3.2	39.9	0.00	0.00	0.00
851.0	6.70	180.00	848.9	-43.7	3.1	43.6	0.89	-0.65	-5.16
882.0	6.80	179.20	879.7	-47.3	3.1	47.3	0.44	0.32	-2.58
913.0	7.30	179.00	910.5	-51.1	3.2	51.1	1.61	1.61	-0.65
944.0	7.40	179.00	941.2	-55.1	3.3	55.0	0.32	0.32	0.00
975.0	7.70	180.40	972.0	-59.1	3.3	59.1	1.14	0.97	4.52
1,005.0	8.00	182.20	1,001.7	-63.2	3.2	63.2	1.29	1.00	6.00
1,036.0	8.40	182.00	1,032.4	-67.7	3.0	67.6	1.29	1.29	-0.65
1,067.0	8.70	181.90	1,063.0	-72.3	2.9	72.2	0.97	0.97	-0.32
1,098.0	9.40	180.40	1,093.6	-77.1	2.8	77.1	2.38	2.26	-4.84
1,129.0	10.30	180.20	1,124.2	-82.4	2.7	82.4	2.91	2.90	-0.65
1,159.0	10.80	180.30	1,153.7	-87.9	2.7	87.9	1.67	1.67	0.33
1,190.0	11.00	181.50	1,184.1	-93.8	2.6	93.8	0.98	0.65	3.87
1,222.0	11.30	182.40	1,215.5	-100.0	2.4	99.9	1.08	0.94	2.81
1,254.0	11.90	181.40	1,246.8	-106.4	2.2	106.4	1.98	1.87	-3.12
1,285.0	12.70	180.40	1,277.1	-113.0	2.1	113.0	2.67	2.58	-3.23
1,317.0	13.30	181.80	1,308.3	-120.2	2.0	120.2	2.15	1.87	4.69
1,349.0	13.50	182.40	1,339.4	-127.6	1.7	127.6	0.72	0.62	1.56
1,381.0	14.10	183.30	1,370.5	-135.2	1.3	135.2	1.99	1.87	2.81
1,413.0	14.80	182.90	1,401.5	-143.2	0.9	143.2	2.21	2.19	-1.25
1,445.0	15.40	184.30	1,432.4	-151.5	0.3	151.5	2.19	1.87	4.37
1,477.0	16.10	185.10	1,463.2	-160.2	-0.4	160.2	2.29	2.19	2.50
1,508.0	16.80	186.40	1,492.9	-168.9	-1.3	168.9	2.55	2.26	4.19
1,540.0	17.50	187.00	1,523.5	-178.3	-2.4	178.3	2.26	2.19	1.87
1,572.0	18.20	186.30	1,554.0	-188.0	-3.5	188.1	2.29	2.19	-2.19
1,604.0	19.10	182.90	1,584.3	-198.2	-4.3	198.3	4.41	2.81	-10.62
1,635.0	19.60	179.50	1,613.5	-208.5	-4.5	208.5	3.98	1.61	-10.97
1,666.0	20.60	178.20	1,642.6	-219.2	-4.3	219.2	3.53	3.23	-4.19
1,698.0	20.90	178.00	1,672.6	-230.5	-3.9	230.5	0.96	0.94	-0.62
1,730.0	20.90	178.50	1,702.5	-241.9	-3.6	241.9	0.56	0.00	1.56
1,762.0	21.50	179.00	1,732.3	-253.5	-3.3	253.5	1.96	1.87	1.56
1,794.0	22.00	179.00	1,762.0	-265.3	-3.1	265.3	1.56	1.56	0.00
1,825.0	22.30	178.10	1,790.7	-277.0	-2.8	277.0	1.46	0.97	-2.90
1,857.0	23.10	177.90	1,820.3	-289.3	-2.4	289.4	2.51	2.50	-0.62
1,889.0	23.90	179.10	1,849.6	-302.1	-2.1	302.1	2.91	2.50	3.75
1,920.0	24.90	179.60	1,877.8	-314.9	-1.9	314.9	3.29	3.23	1.61
1,952.0	25.80	181.10	1,906.7	-328.6	-2.0	328.6	3.45	2.81	4.69
1,984.0	26.50	181.50	1,935.5	-342.7	-2.3	342.7	2.26	2.19	1.25
2,016.0	27.00	181.90	1,964.0	-357.1	-2.8	357.1	1.66	1.56	1.25
2,047.0	27.80	181.90	1,991.6	-371.4	-3.2	371.4	2.58	2.58	0.00
2,079.0	28.40	182.30	2,019.8	-386.4	-3.8	386.4	1.97	1.87	1.25
2,110.0	29.30	182.20	2,046.9	-401.4	-4.4	401.4	2.91	2.90	-0.32
2,142.0	30.30	182.00	2,074.7	-417.3	-4.9	417.3	3.14	3.12	-0.62
2,174.0	31.10	181.10	2,102.2	-433.6	-5.4	433.6	2.88	2.50	-2.81
2,205.0	31.70	180.40	2,128.7	-449.7	-5.6	449.8	2.26	1.94	-2.26
2,237.0	31.40	179.70	2,156.0	-466.5	-5.6	466.5	1.48	-0.94	-2.19
2,269.0	31.10	178.90	2,183.3	-483.1	-5.4	483.1	1.60	-0.94	-2.50
2,301.0	30.80	179.00	2,210.8	-499.5	-5.1	499.6	0.95	-0.94	0.31
2,332.0	30.80	179.60	2,237.4	-515.4	-4.9	515.4	0.99	0.00	1.94
2,364.0	30.50	180.40	2,264.9	-531.7	-4.9	531.7	1.58	-0.94	2.50
2,427.0	30.50	180.40	2,319.2	-563.7	-5.1	563.7	0.00	0.00	0.00
2,491.0	30.50	180.40	2,374.3	-596.2	-5.4	596.2	0.00	0.00	0.00
2,554.0	31.30	181.20	2,428.4	-628.5	-5.8	628.5	1.43	1.27	1.27

Survey Report

Company: Huntington Energy
Project: Canyon Largo 489
Site: Section 18-T25N-R6W
Well: Rio Arriba, N.M.
Wellbore: Wellbore #1
Design: Wellbore #1

Local Co-ordinate Reference: Well Rio Arriba, N.M.
TVD Reference: WELL @ 0.0ft (Original Well Elev)
MD Reference: WELL @ 0.0ft (Original Well Elev)
North Reference: True
Survey Calculation Method: Minimum Curvature
Database: EDM 2003.21 Single User Db

Survey

Measured Depth (ft)	Inclination (°)	Azimuth (°)	Vertical Depth (ft)	+N/-S (ft)	+E/-W (ft)	Vertical Section (ft)	Dogleg Rate (°/100ft)	Build Rate (°/100ft)	Turn Rate (°/100ft)
2,617.0	32.20	181.10	2,482.0	-661.7	-6.5	661.7	1.43	1.43	-0.16
2,681.0	31.80	180.10	2,536.3	-695.6	-6.8	695.6	1.04	-0.62	-1.56
2,745.0	31.90	180.50	2,590.6	-729.4	-7.0	729.4	0.36	0.16	0.62
2,808.0	31.70	180.30	2,644.2	-762.5	-7.3	762.6	0.36	-0.32	-0.32
2,871.0	32.70	180.30	2,697.5	-796.1	-7.4	796.2	1.59	1.59	0.00
2,935.0	33.10	180.40	2,751.2	-830.9	-7.6	830.9	0.63	0.62	0.16
2,999.0	32.00	180.10	2,805.2	-865.3	-7.8	865.3	1.74	-1.72	-0.47
3,062.0	31.60	179.70	2,858.7	-898.5	-7.7	898.5	0.72	-0.63	-0.63
3,125.0	32.70	180.00	2,912.0	-932.0	-7.6	932.1	1.76	1.75	0.48
3,188.0	32.40	180.10	2,965.1	-965.9	-7.7	966.0	0.48	-0.48	0.16
3,251.0	31.80	180.70	3,018.5	-999.4	-7.9	999.4	1.08	-0.95	0.95
3,314.0	32.40	181.20	3,071.9	-1,032.9	-8.5	1,032.9	1.04	0.95	0.79
3,378.0	32.30	181.30	3,125.9	-1,067.1	-9.2	1,067.2	0.18	-0.16	0.16
3,441.0	31.50	181.20	3,179.4	-1,100.4	-9.9	1,100.4	1.27	-1.27	-0.16
3,504.0	32.40	182.10	3,232.9	-1,133.7	-10.9	1,133.8	1.62	1.43	1.43
3,568.0	32.00	181.70	3,287.0	-1,167.8	-12.0	1,167.9	0.71	-0.62	-0.62
3,631.0	32.00	180.90	3,340.5	-1,201.2	-12.8	1,201.3	0.67	0.00	-1.27
3,694.0	33.10	180.20	3,393.6	-1,235.1	-13.1	1,235.2	1.85	1.75	-1.11
3,758.0	31.80	179.60	3,447.6	-1,269.4	-13.1	1,269.5	2.09	-2.03	-0.94
3,821.0	31.90	179.50	3,501.1	-1,302.7	-12.8	1,302.7	0.18	0.16	-0.16
3,884.0	33.10	179.90	3,554.2	-1,336.5	-12.6	1,336.6	1.94	1.90	0.63
3,948.0	32.60	178.90	3,608.0	-1,371.2	-12.3	1,371.3	1.15	-0.78	-1.56
4,010.0	32.20	179.60	3,660.3	-1,404.4	-11.8	1,404.5	0.88	-0.65	1.13
4,074.0	32.50	178.60	3,714.4	-1,438.7	-11.3	1,438.7	0.96	0.47	-1.56
4,138.0	33.00	181.00	3,768.2	-1,473.3	-11.2	1,473.3	2.17	0.78	3.75
4,201.0	32.60	181.20	3,821.2	-1,507.4	-11.8	1,507.5	0.66	-0.63	0.32
4,264.0	33.60	180.80	3,874.0	-1,541.8	-12.4	1,541.9	1.62	1.59	-0.63
4,328.0	33.80	181.80	3,927.2	-1,577.3	-13.2	1,577.4	0.92	0.31	1.56
4,391.0	32.70	181.50	3,979.9	-1,611.8	-14.2	1,611.9	1.77	-1.75	-0.48
4,455.0	31.60	181.60	4,034.1	-1,645.9	-15.1	1,646.0	1.72	-1.72	0.16
4,518.0	30.60	180.80	4,088.0	-1,678.4	-15.8	1,678.5	1.72	-1.59	-1.27
4,582.0	30.70	181.90	4,143.1	-1,711.0	-16.6	1,711.1	0.89	0.16	1.72
4,646.0	30.20	182.00	4,198.3	-1,743.5	-17.7	1,743.5	0.79	-0.78	0.16
4,709.0	31.40	183.00	4,252.4	-1,775.7	-19.1	1,775.8	2.07	1.90	1.59
4,773.0	29.80	182.50	4,307.5	-1,808.2	-20.7	1,808.3	2.53	-2.50	-0.78
4,836.0	28.60	179.90	4,362.5	-1,838.9	-21.3	1,839.1	2.77	-1.90	-4.13
4,899.0	28.50	179.40	4,417.8	-1,869.1	-21.2	1,869.2	0.41	-0.16	-0.79
4,963.0	28.20	179.00	4,474.1	-1,899.4	-20.7	1,899.6	0.55	-0.47	-0.62
5,026.0	30.10	179.70	4,529.1	-1,930.1	-20.4	1,930.2	3.06	3.02	1.11
5,090.0	29.20	180.20	4,584.8	-1,961.8	-20.4	1,961.9	1.46	-1.41	0.78
5,154.0	28.70	181.20	4,640.8	-1,992.8	-20.7	1,992.9	1.09	-0.78	1.56
5,217.0	28.20	181.30	4,696.1	-2,022.8	-21.4	2,022.9	0.80	-0.79	0.16
5,281.0	26.60	181.00	4,753.0	-2,052.2	-22.0	2,052.3	2.51	-2.50	-0.47
5,344.0	24.00	181.80	4,809.9	-2,079.1	-22.6	2,079.2	4.16	-4.13	1.27
5,408.0	23.20	179.70	4,866.6	-2,104.7	-23.0	2,104.9	1.81	-1.25	-3.28
5,472.0	24.40	179.70	4,927.1	-2,130.6	-22.8	2,130.7	1.87	1.87	0.00
5,535.0	23.60	180.60	4,984.7	-2,156.2	-22.9	2,156.3	1.40	-1.27	1.43
5,599.0	21.00	180.90	5,043.9	-2,180.5	-23.2	2,180.6	4.07	-4.06	0.47
5,663.0	18.40	177.80	5,104.1	-2,202.0	-23.0	2,202.2	4.38	-4.06	-4.84
5,726.0	16.00	177.10	5,164.3	-2,220.6	-22.2	2,220.8	3.82	-3.81	-1.11
5,790.0	14.90	175.00	5,226.0	-2,237.7	-21.0	2,237.7	1.93	-1.72	-3.28
5,853.0	14.20	174.10	5,287.0	-2,253.4	-19.5	2,253.5	1.17	-1.11	-1.43
5,917.0	12.90	172.40	5,349.2	-2,268.3	-17.8	2,268.4	2.12	-2.03	-2.66
5,981.0	11.20	173.20	5,411.8	-2,281.5	-16.1	2,281.6	2.67	-2.66	1.25

Survey Report

Company: Huntington Energy
 Project: Canyon Largo 489
 Site: Section 18-T25N-R6W
 Well: Rio Arriba, N.M.
 Wellbore: Wellbore #1
 Design: Wellbore #1

Local Co-ordinate Reference: Well Rio Arriba, N.M.
 TVD Reference: WELL @ 0.0ft (Original Well Elev)
 MD Reference: WELL @ 0.0ft (Original Well Elev)
 North Reference: True
 Survey Calculation Method: Minimum Curvature
 Database: EDM 2003.21 Single User Db

Survey

Measured Depth (ft)	Inclination (°)	Azimuth (°)	Vertical Depth (ft)	+N/-S (ft)	+E/-W (ft)	Vertical Section (ft)	Dogleg Rate (°/100ft)	Build Rate (°/100ft)	Turn Rate (°/100ft)
6,044.0	10.10	172.00	5,473.7	-2,293.1	-14.6	2,293.1	1.78	-1.75	-1.90
6,108.0	10.10	173.50	5,536.7	-2,304.2	-13.2	2,304.2	0.41	0.00	2.34
6,170.0	9.90	172.50	5,597.8	-2,314.9	-11.9	2,314.9	0.43	-0.32	-1.61
6,234.0	9.90	170.60	5,660.8	-2,325.8	-10.3	2,325.8	0.51	0.00	-2.97
6,297.0	8.70	169.70	5,723.0	-2,335.8	-8.5	2,335.8	1.92	-1.90	-1.43
6,361.0	7.50	166.90	5,786.3	-2,344.7	-6.7	2,344.6	1.97	-1.87	-4.37
6,423.0	7.50	168.80	5,847.8	-2,352.6	-5.0	2,352.5	0.40	0.00	3.06
6,486.0	6.70	171.10	5,910.3	-2,360.2	-3.6	2,360.1	1.35	-1.27	3.65
6,549.0	5.90	174.30	5,972.9	-2,367.1	-2.7	2,367.0	1.39	-1.27	5.08
6,613.0	5.50	175.50	6,036.6	-2,373.4	-2.2	2,373.3	0.65	-0.62	1.87
6,661.0	4.30	169.50	6,084.5	-2,377.5	-1.7	2,377.3	2.72	-2.50	-12.50
6,692.0	3.50	168.40	6,115.4	-2,379.5	-1.3	2,379.4	2.59	-2.58	-3.55
6,724.0	2.70	157.30	6,147.3	-2,381.2	-0.8	2,381.1	3.11	-2.50	-34.69
6,755.0	2.20	147.00	6,178.3	-2,382.4	-0.2	2,382.2	2.14	-1.61	-33.23
6,787.0	1.40	149.80	6,210.3	-2,383.2	0.4	2,383.1	2.51	-2.50	8.75
6,819.0	1.20	128.90	6,242.3	-2,383.8	0.8	2,383.6	1.60	-0.62	-65.31
6,851.0	0.70	46.90	6,274.3	-2,383.9	1.2	2,383.7	4.07	-1.56	-256.25
6,883.0	2.30	21.90	6,306.3	-2,383.1	1.6	2,383.0	5.29	5.00	-78.12
6,914.0	3.50	9.40	6,337.2	-2,381.6	2.0	2,381.4	4.35	3.87	-40.32
6,946.0	4.00	10.10	6,369.2	-2,379.6	2.3	2,379.4	1.57	1.56	2.19
6,978.0	4.90	9.70	6,401.1	-2,377.1	2.8	2,376.9	2.81	2.81	-1.25
7,010.0	5.60	7.10	6,432.9	-2,374.2	3.2	2,374.0	2.31	2.19	-8.12
7,042.0	6.00	3.30	6,464.8	-2,371.0	3.5	2,370.8	1.73	1.25	-11.87
7,073.0	6.00	3.20	6,495.6	-2,367.8	3.7	2,367.6	0.03	0.00	-0.32
7,105.0	5.70	2.70	6,527.4	-2,364.5	3.8	2,364.3	0.95	-0.94	-1.56
7,137.0	5.50	6.00	6,559.3	-2,361.4	4.1	2,361.2	1.18	-0.62	10.31
7,168.0	5.80	2.10	6,590.1	-2,358.3	4.3	2,358.1	1.57	0.87	-12.58
7,200.0	6.50	0.00	6,621.9	-2,354.9	4.3	2,354.7	2.30	2.19	-6.56
7,232.0	6.90	1.50	6,653.7	-2,351.2	4.4	2,351.0	1.36	1.25	4.69
7,264.0	6.90	1.30	6,685.5	-2,347.3	4.5	2,347.1	0.08	0.00	-0.62
7,295.0	6.50	356.60	6,716.3	-2,343.7	4.4	2,343.5	2.13	-1.29	-14.52
7,327.0	6.00	358.10	6,748.1	-2,340.2	4.3	2,340.0	1.62	-1.56	4.06
7,358.0	5.80	356.70	6,778.9	-2,337.1	4.1	2,336.9	0.79	-0.65	-4.52
7,422.0	5.10	358.60	6,842.6	-2,331.0	3.9	2,330.8	1.13	-1.09	2.97
7,485.0	4.60	356.50	6,905.4	-2,325.7	3.7	2,325.5	0.84	-0.79	-3.33
7,561.0	3.60	356.00	7,001.2	-2,318.8	3.2	2,318.6	1.04	-1.04	-0.52
7,676.0	3.20	354.70	7,096.0	-2,313.2	2.8	2,313.0	0.43	-0.42	-1.37
7,771.0	2.90	354.70	7,190.9	-2,308.2	2.3	2,308.0	0.32	-0.32	0.00
7,945.0	2.90	354.70	7,364.6	-2,299.4	1.5	2,299.2	0.00	0.00	0.00

Checked By: _____ Approved By: _____ Date: _____