#### District I

1625 N. French Dr., Holdis, NM 88240

District II

1301 W. Grand Ave., Artesia, NM 88210

District III

### State of New Mexico Energy Minerals and Natural Resources

Department
Oil Conservation Division
1220 South St. Francis Dr.

July 21, 2008 lemporary pits, clused-loop sylems, and below-grade

Form C-144

For temporary pils, closed-loop sytems, and below-grade tanks, submit to the appropriate NMOCD District Office.

1000 Rio Brazos Rd., Aztec, NM 87410	Santa Fe, NM 87505	For permanent pits and exceptions submit to the Santa Fe
District IV		Environmental Bureau office and provide a copy to the appropriate NMOCD District Office.
1220 S. St. Francis Dr., Santa Fe. NM 87505		
3221 <u>Pro</u>	Pit. Closed-Loop System, Below-Coposed Alternative Method Permit or Co	
Type of action:	Permit of a pit, closed-loop system, below-gra	ade tank, or proposed alternative method
	Closure of a pit, closed-loop system, helow-g	rade tank, or proposed alternative method
The state of the s	Modification to an existing permit	
•	X Closure plan only submitted for an existing policy below-grade tank, or proposed alternative me	ermitted or non-permitted pit, closed-loop system, thod
Instructions: Please submit one	application (Form C-144) per individual pit, close	d-loop system, below-grade tank or alternative request
	al of this request does not relieve the operator of liability should opera relieve the operator of its responsibility to comply with any other app	
t Operator: ConocoPhillips Compar	nγ	OGRID#: 217817
Address: PO Box 4289, Farming		T Zu - T - Water and Culture a
Facility or well name: San Juan 3	2-8 Unit 16B	
API Number:	30-045-34506 OCD Permit N	Number:
U/L or Qtr/Qtr: F(SE/NW) Sec	tion: 15 Township: 31N Range:	8W County: San Juan
Center of Proposed Design: Latitud	le: 36.9000002 °N Longitude:	107.665963 °W NAD: 1927 X 1983
Surface Owner: X Federal	State Private Tribal Trust or	Indian Allotment
Permanent Emergency X X Lined Unlined X String-Reinforced	orkover  Cavitation P&A  Liner type: Thickness 12 mit X LLDPE  Factory Other Volume:	4400 bbl Dimensions L 65' x W 45' x D 10'
3 Closed-loop System: Subsective of Operation. P&A	ection II of 19.15.17.11 NMAC  Drilling a new well Workover or Drilling (Appl notice of intent)	lies to activities which require prior approval of a permit or
Lined Unlined Lin	ound Steel Tanks	RECE
4 Below-grade tank: Subsection	n 1 of 19.15.17.11 NMAC	TEB 20 OIL CONS. DIV.
Volume:	bbl Type of fluid:	OIL CONS. DIV
Tank Construction material:		
Secondary containment with leak	detection Visible sidewalls, liner, 6-inch lift an	
Visible sidewalls and liner	Visible sidewalls only Other	d automatic overflow shut-off
Liner Type: Thickness	mil HDPE PVC Othe	а
Alternative Method:		
Submittal of an exception remest is n	equired. Exceptions must be submitted to the Santa Fe En	IVEORIMENTAL Bureau office for consideration of approval
	-q	· - монычены выподи отности сольных винь на францун.

Subsection D of 19,15.17.11 NMAC (Applies to permanent pit, temporary plts, and belov-grade tanks)  Chain link, six feet in height, two strands of barbed wire at top (Required if lowated within 1000 feet of a permanent residence, school, hospital, institution or church)  Four foot height, four strands of barbed wire evenly spaced between one and four feet  Alternate. Please specify 4' hogwire fouce with a single strand of barbed wire on top.							
Nothing Subaggion Post 0 (8 17 11 NB/AC / Amilianta and annual and annual and annual and annual and annual							
Netting: Subsection E of 19.15.17.11 NMAC (Applies to permanent pits and permanent open top tanks)  Screen Netting Other  Monthly inspections (If netting or screening is not physically jeasible)							
8							
Signs: Subsection C of 19.15.17.11 NMAC  12" X 24", 2" lettering, providing Operator's name, site location, and emergency telephone numbers  X Signed in compliance with 19.15.3.103 NMAC							
9  Administrative Approvals and Exceptions: Justifications and/or demonstrations of equivalency are required. Please refer to 19.15.17 NMAC for guidance.							
Please check a box if one or more of the following is requested, if not leave blank:							
Administrative approval(s): Requests must be submitted to the appropriate division district of the Santa Fe Environmental Bureau office for cons (Fencing/BGT Liner)	ideration of up	proval					
Exceptiou(s): Requests must be submitted to the Santa Fe Environmental Bureau office for consideration of approval.							
10							
Siting Criteria (regarding permitting): 19.15.17.10 NMAC Instructions: The applicant must demonstrate compliance for each string criteria below in the application. Recommendations of acceptable source material are provided below. Requests regarding changes to certain siting criteria may require administrative approval from the appropriate district office or may be considered an exception which must be submitted to the Santa Fe Environmental Bureau Office for consideration of approval. Applicant must attach justification for request. Please refer to 19.15.17.10 NMAC for guidance. Siting criteria does not apply to drying pads or above grade-tanks associated with a classed-loop system.							
Ground water is less than 50 feet below the bottom of the temporary pit, permanent pit, or below-grade tank.  - NM Office of the State Engineer - iWATERS database search; USGS; Data obtained from nearby wells	Yes	□No					
Within 300 feet of a continuously flowing watercourse, or 200 feet of any other watercourse, lakebed, sinkhole, or playa lake (measured from the ordinary high-water mark).  - Topographic map; Visual inspection (certification) of the proposed site	Yes	□No					
Within 300 feet from a permanent residence, school, hospital, institution, or church in existence at the time of initial application.	∏Yes	□No					
(Applies to temporary, emergency, or cavitation pits and below-grade tanks)	NA						
Visual inspection (certification) of the proposed site; Aerial photo; Satellite image	_						
Within 1909 feet from a permanent residence, school, hospital, institution, or church in existence at the time of initial application.  (Applied to permanent pits)  - Visual inspection (certification) of the proposed site; Aerial photo; Satellite image	∐Yes □NA	∐ <sup>No</sup>					
Within 500 horizonal feet of a private, domestic fresh water well or spring that less than five households use for domestic or stock watering purposes, or within 1000 horizontal feet of any other fresh water well or spring, in existence at the time of initial application.	Yes	□No					
- NM Office of the State Engineer - iWATERS database search; Visual inspection (certification) of the proposed site.		}					
Within incorporated municipal boundaries or within a defined municipal fresh water well field covered under a municipal ordinance adopted pursuant to NMSA 1978, Section 3-27-3, as amended	∐Y∞s	∏No					
<ul> <li>Written confirmation or verification from the municipality; Written approval obtained from the municipality</li> <li>Within 500 feet of a wetland.</li> <li>US Fish and Wildlife Wetland Identification map; Topographic map; Visual inspection (certification) of the proposed site</li> </ul>	Yes	∏No					
Within the area overlying a subsurface mine.	Yes	□No					
- Written confirmation or verification or map from the NM EMNRD - Mining and Mineral Division  Within an unstable area.	Yes	ПNo					
- Engineering measures incorporated into the design; NM Bureau of Geology & Mineral Resources; USGS; NM Geological Society; Topographic map	<u></u>						
Within a 100-year floodplain - FEMA map	Yes	∏No					

Form C-144

Temporary Pits. Emergency Pits and Below-grade Tanks Permit Application Attachment Checklist: Subsection B of 19.15.17.9 NMAC							
Instructions: Each of the following items must be attached to the application. Please indicate, by a check mark in the box, that the documents are attached.  Hydrogeologic Report (Below-grade Tanks) - based upon the requirements of Paragraph (4) of Subsection B of 19.15.17.9 NMAC							
Hydrogeologic Data (Temporary and Emergency Pits) - based upon the requirements of Paragraph (2) of Subsection B of 19.15 17.9							
Siting Criteria Comphance Demonstrations - based upon the appropriate requirements of 19.15.17.10 NMAC							
Design Plan - based upon the appropriate requirements of 19.15.17.11 NMAC							
Operating and Maintenance Plan - based upon the appropriate requirements of 19.15.17.12 NMAC							
Closure Plan (Please complete Boxes 14 through 18, if applicable) - based upon the appropriate requirements of Subsection C of							
19.15.17.9 NMAC and 19.15.17.13 NMAC							
Previously Approved Design (attach copy of design) API or Permit							
12 Closed-loop Systems Permit Application Attachment Checklist: Subsection B of 19 15.17.9 NMAC Instructions: Rack of the following stems must be attached to the application. Please indicate, by a check mark in the box, that the documents are attached.  Geologic and Hydrogeologic Data (only for on-site closure) - based upon the requirements of Paragraph (3) of Subsection B of 19.15.17.9  Siting Criteria Compliance Demonstrations (only for on-site closure) - based upon the appropriate requirements of 19.15.17.10 NMAC							
Design Plan - based upon the appropriate requirements of 19.15.17.11 NMAC							
Operating and Maintenance Plan - based upon the appropriate requirements of 19.15.17.12 NMAC							
Closure Plan (Please complete Boxes 14 through 18, if applicable) - based upon the appropriate requirements of Subsection C of 19.15.17.9							
NMAC and 19.15.17.13 NMAC							
Previously Approved Design (attach copy of design)  API							
Previously Approved Operating and Maintenance Plan API							
13							
Permanent Pits Permit Application Checklist: Subsection B of 19.15.17.9 NMAC							
Instructions: Each of the following items must be attached to the application. Please indicate, by a check mark in the box, that the documents are attached.							
Hydrogeologic Report - based upon the requirements of Paragraph (1) of Subsection B of 19.15.17.9 NMAC							
Siting Criteria Compliance Demonstrations - based upon the appropriate requirements of 19.15.17.10 NMAC							
Climatological Factors Assessment							
Certified Engineering Design Plans - based upon the appropriate requirements of 19.15 17.11 NMAC  Dike Protection and Structural Integrity Design: based upon the appropriate requirements of 19.15 17.11 NMAC							
Leak Detection Design - based apon the appropriate requirements of 19.15.17.11 NMAC							
Liner Specifications and Compatibility Assessment - based upon the appropriate requirements of 19.15.17.11 NMAC							
Quality Control/Quality Assurance Construction and Installation Plan							
Operating and Maintenance Plan - based upon the appropriate requirements of 19.15.17.12 NMAC							
Freeboard and Overtopping Prevention Plan - based upon the appropriate requirements of 19,15,17,11 NMAC							
Nuísance or Hazardous Odors, including II2S, Prevention Plan							
Emergency Response Plan Oil Pield Waste Stream Characterization							
Monitoring and Inspection Plan							
Firesian Control Plan							
Closure Plan - based upon the appropriate requirements of Subsection C of 19.15.17.9 NMAC and 19.15.17.13 NMAC							
14							
Proposed Closure: 19.15.17.13 NMAC Instructions: Please complete the applicable boxes, Boxes 14 through 18, in regards to the proposed closure plan.							
Type: X Drilling Workover Emergency X Cavitation P&A Permanent Pit Below-grade Tank Closed-loop System							
Alternative							
Proposed Closure Method: Waste Excavation and Removal							
Waste Removal (Closed-loop systems only)							
X On-site Closure Method (only for temporary pits and closed-loop systems)							
XIn-place Burial On-site Trench							
Alternative Closure Method (Exceptions must be submitted to the Santa Fe Environmental Bureau for consideration)							
Waste Excavation and Removal Closure Flan Checklist; (19.15.17.13 NMAC) Instructions: Each of the following items must be estuched to the closure plan.							
Please indicate, by a check mark in the box, that the documents are attached.  Protocols and Procedures - based upon the appropriate requirements of 19.15.17.13 NMAC							
Confirmation Sampling Plan (if applicable) - based upon the appropriate requirements of Subsection F of 19.15.17.13 NMAC							
Disposal Facility Name and Permit Number (for liquids, drilling fluids and drill cultings)							
Soil Backfill and Cover Design Specifications - based upon the appropriate requirements of Subsection H of 19.15.17.13 NMAC							
Re-vegetation Plan based upon the appropriate requirements of Subsection 1 of 19.15.17.13 NMAC							
Site Reclamation Plan - based upon the appropriate requirements of Subsection G of 19.15.17.13 NMAC							

16 Waste Removal Clusure For Clusted-loop Systems That Utilize Above Ground Steel Tanks or Haul-off Bins Only; (19.15.17.13.D NMAC)									
Instructions: Please identify the facilities for the disposal of liquids, drilling fluids and drill custings. Use attachment if more than two fare required.	acilities								
Disposal Facility Name: Disposal Facility Permit #:	•								
Disposal Facility Name: Disposal Facility Permit #:									
Will any of the proposed closed-loop system operations and associated activities occur on or in areas that will not be used for future service and operations?  Yes (If yes, please provide the information No									
Required for Impacted areas which will not be used for future service and operations:  Soil Backfül and Cover Design Specification - based upon the appropriate requirements of Subsection H of 19,15,17,13 NMAC									
Re-vegetation Plan - based upon the appropriate requirements of Subsection I of 19.15.17.13 NMAC  Site Reclamation Plan - based upon the appropriate requirements of Subsection G of 19.15 17 13 NMAC									
Bits Recompleted 1 and a specific and a specific of the specif									
17  Siting Criteria (Regarding on-site closure methods only: 19.15.17.10 NMAC Instructions: Each string criteria requires a demonstration of compliance in the closure plan. Recommendations of acceptable source material are provided how cortain siting criteria may require administrative approval from the appropriate district office or may be considered an exception which must be submitted to the for consideration of approval. Justifications analyst demonstrations of equivalency are required. Please refer to 19.15.17.10 NMAC for guidance.									
Ground water is less than 50 feet below the bottom of the buried waste.  - NM Office of the State Engineer - 1WATERS database search; USGS: Data obtained from nearby wells	Yes X No								
Ground water is between 50 and 100 feet below the bottom of the buried waste	X Yes No								
<ul> <li>NM Office of the State Engineer - iWATERS database search: USGS; Data obtained from nearby wells</li> </ul>	N/A								
Ground water is more than 100 feet below the bottom of the buried waste.	Yes XNo								
- NM Office of the State Engineer - iWATERS database search, USGS; Data obtained from nearby wells	□ N/A								
Within 300 feet of a continuously flowing watercourse, or 200 feet of any other significant watercourse or lakebed, sinkhole, or playa take (measured from the ordinary high-water mark).									
- Topographic map: Visual inspection (certification) of the proposed site									
Within 300 feet from a permanent residence, school, hospital, institution, or church in existence at the time of initial application.  - Visual inspection (certification) of the proposed site; Aerial photo; satellite image	Yes XNo								
	Yes X No								
Within 500 herizontal feet of a private, domestic fresh water well or spring that less than five households use for domestic or stock watering purposes, or within 1000 horizontal fee of any other fresh water well or spring, in existence at the time of the initial application.  - NM Office of the State Engineer - iWATERS database; Visual inspection (certification) of the proposed site									
Within incorporated municipal boundaries or within a defined municipal fresh water well field covered under a municipal ordinance adopted pursuant to NMSA 1978. Section 3-27-3, as amended.	Yes XNo								
Written confirmation or verification from the municipality; Written approval obtained from the municipality  Written confirmation or verification from the municipality; Written approval obtained from the municipality  Written confirmation or verification from the municipality; Written approval obtained from the municipality  Written confirmation or verification from the municipality; Written approval obtained from the municipality  Written confirmation or verification from the municipality; Written approval obtained from the municipality  Written confirmation or verification from the municipality; Written approval obtained from the municipality  Written confirmation or verification from the municipality; Written approval obtained from the municipality  Written confirmation or verification from the municipality; Written approval obtained from the municipality  Written confirmation or verification from the municipality; Written approval obtained from the municipality  Written confirmation or verification from the municipality of the municipality o	□., [V].,								
Within 500 feet of a wetland  - US Fish and Wildlife Wetland Identification map; Topographic map; Visual inspection (certification) of the proposed site	Yes X No								
Within the area overlying a subsurface mine.	Yes X No								
- Written confirmation or verification or map from the NM EMNRD-Mining and Mineral Division	L.								
Within an unstable area.	Yes X No								
<ul> <li>Engineering measures incorporated into the design; NM Bureau of Geology &amp; Mineral Resources; USGS; NM Geological Society;</li> <li>Topographic map</li> </ul>									
Within a 100-year floodplain FEMA map	Yes XNo								
18 On-Site Closure Plan Checklist: (19.15.17.13 NMAC) Instructions: Each of the following items must bee attached to the closure plan. Please indicate,									
by a check mark in the box, that the documents are attached.									
Siting Criteria Compliance Demonstrations - based upon the appropriate requirements of 19.15.17.10 NMAC     Proof of Surface Owner Notice - based upon the appropriate requirements of Subsection F of 19.15.17.13 NMAC									
X Proof of Surface Owner Notice - based upon the appropriate requirements of Subsection F of 19.15.17.13 NMAC  Construction/Design Plan of Burial Trench (if applicable) based upon the appropriate requirements of 19.15.17.11 NMAC									
	10 15 17 11 NMAC								
Construction/Design Plan of Temporary Pit (for in place burial of a drying pad) - based upon the appropriate requirements of 19.15.17.11 NMAC  X Protocols and Procedures - based upon the appropriate requirements of 19.15.17.13 NMAC									
Confirmation Sampling Plan (if applicable) - based upon the appropriate requirements of Subsection F of 19.15.17.13 NMAC									
X Waste Material Sampling Plan - based upon the appropriate requirements of Subsection F of 19.15.17.13 NMAC									
X  Disposal Facility Name and Permit Number (for liquids, drilling fluids and drill cuttings or in case on-site closure standards cannot be achieved)   X  Soil Cover Design - based upon the appropriate requirements of Subsection H of 19.15.17.13 NMAC									
X Re-vegetation Plan - based upon the appropriate requirements of Subsection I of 19.15.17 13 NMAC									
X Site Reclamation Plan - based upon the appropriate requirements of Subsection G of 19.15.17 13 NMAC									


19	
Operator Application Certification:  I hereby certify that the information submitted with this application is true, a	accurate and complete to the best of my knowledge and belief.
Name (Print): Ethel Tally	Title: Staff Regulatory Technician
Signature: Cthil Tally	Date: 2/23/08
e-mail address: ethel tally @compophilips.com U	Telephone: 505-599-4027
The second of th	20000000
20	
OCD Approval: Permit Application (including closure plan)	Closure Plan (only) OCD Conditions (see attachment)
OCD Representative Signature:	Approval Date: 5-5-09
William /	Approval Date: 3-5-09
Title: Enviro/spec	OCD Permit Number:
	or to implementing any closure activities and submitting the closure report. The closure letion of the closure activities. Please do not complete this section of the form until an
	, a
22. Closure Method:	
Waste Excavation and Removal On-site Closure Method	Alternative Closure Method Waste Removal (Closed-loop systems only)
If different from approved plan, please explain.	_
23	
Closure Report Regarding Waste Removal Closure For Closed-loop Systematics	
	lrilling fluids and drill cultings were disposed. Use attachment if more than two facilities
were utilized. Disposal Facility Name:	Pirangal Facility Dannis Monday
Disposal Facility Name:	Disposal Facility Permit Number:  Disposal Facility Permit Number:
Were the closed-loop system operations and associated activities perform	
Yes (If yes, please demonstrate complilane to the items below)	□No
Required for impacted areas which will not be used for future service and	l operations:
Site Reclamation (Photo Documentation)	
Soil Backfilling and Cover Installation	
Re-vegetation Application Rates and Seeding Technique	
24 <u>Closure Report Attachment Checklist:</u> Instructions: Each of the fithe box, that the documents are attached.	following items must be attached to the closure report. Please indicate, by a check mark in
Proof of Closure Notice (surface owner and division)	
Proof of Deed Notice (required for on-site closure)	
Plot Plan (for on-site closures and temporary pits)	
Confirmation Sampling Analytical Results (if applicable)	
Waste Material Sampling Analytical Results (if applicable)	
Disposal Facility Name and Permit Number	
Soil Backfilling and Cover Installation  Re-vegetation Application Rates and Seeding Technique	
Site Reclamation (Photo Documentation)	
On-site Closure Location Latitude:	Longitude: NAD   1927   1983
25	
Operator Closure Certification:	•
	sure report is ture, accurate and complete to the best of my knowledge and belief. I also certify that s specified in the approved closure plan.
Name (Print):	Title:
Signature	Date:
c-mail address:	Talanhona
с-шын вошсхх:	Telephone:



# New Mexico Office of the State Engineer Water Column/Average Depth to Water

	(quarter	's ai	re 1	=N1	W 2=	NE 3=8	W 4=S	E)			<b>*</b>	
(quarters are smallest to largest) (NAD83 UTM in meters) (In feet)												
POD Number	County	al 2230	222	Q 4	Sec	Tws	Rng	i i gradisti i i i i i i i i i i i i i i i i i i			Section 18 Co.	Water olumn
SJ 00012	San Juan			2	30	31N	W80	258218	4084189	1021	475	546
SJ 00198	San Juan	4	3	3	32	31N	W80	258895	4081451	2003		
SJ 01167	San Juan	3	4	4	24	31N	W80	266352	4084410	465	390	75
SJ 01822	San Juan	2	2	2	25	31N	W80	266540	4084216	550	500	50
SJ 03306	San Juan	4	4	1	25	31N	W80	265739	4083645	600	500	100
Record Count:5 Average Depth to Water: 466 feet												

Minimum Depth: 390 feet Maximum Depth: 500 feet

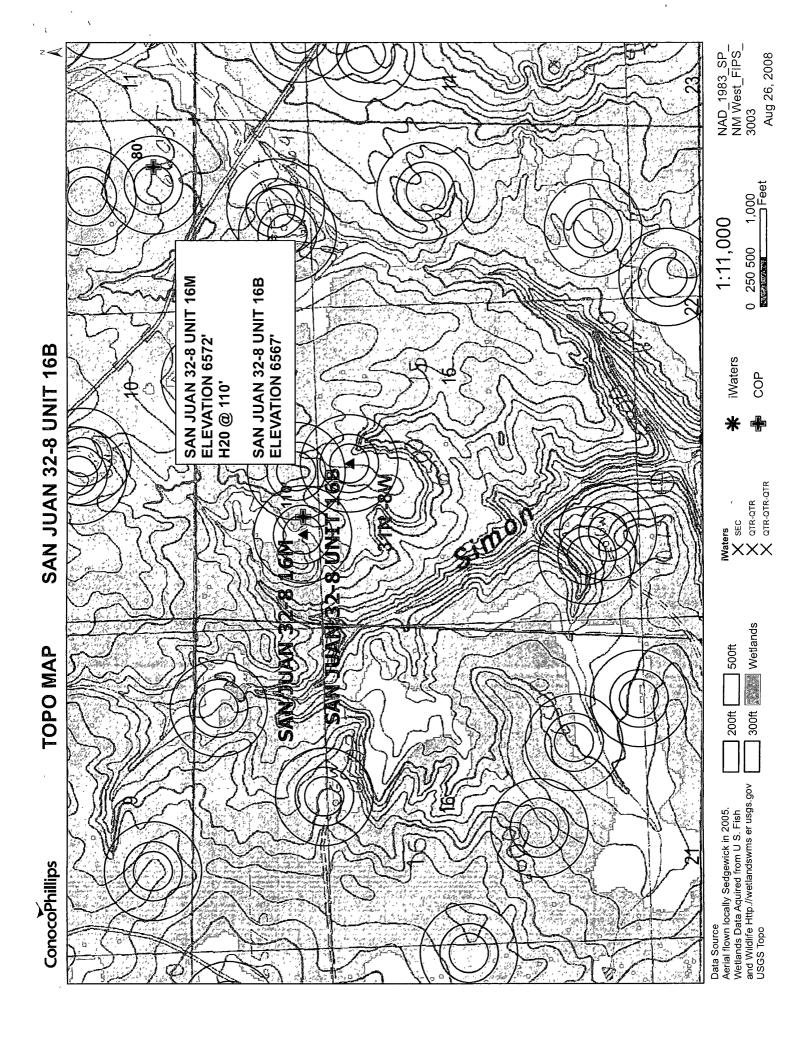

#### TIERRA CORROSION CONTROL, INC. **DRILLING LOG**

COMPANY: ConocoPhillips LOCATION: San Juan 32-8 16M

STATE: NM BIT SIZE: 7 7/8"

LBS COKE BACKFILL: 2,600# ANODE TYPE: 2" X 60" Duriron DATE: May 16, 2008 LEGALS: \$15 T31N R8W DRILLER: Gilbert Peck

CASING SIZE/TYPE: 8" X 20' PVC VENT PIPE: 300'

**ANODE AMOUNT: 10** 

COUNTY: San Juan

**DEPTH: 300'** 

COKE TYPE: Asbury PERF PIPE: 140'

**BOULDER DRILLING: None** 

DEPTH	DRILLER'S LOG	AMPS	DEPTH	DRILLER'S LOG	AMPS
20	Casing	-	310		<del>-</del>
25	Sandstone		315	demonstration of the second se	
30		1.0	.320		
35	- In the latest and the second and t	.8	325	descriptions of the second sec	
40	The second secon		-330	The same of the same and the same of the s	1., *** :
45	Gray-Shale	. 1.2	335	The second second second	
50		1.1	340	i	
.55			345		<del></del>
.60	Sandstone	- 9	350	Y A W /N A MANAGEMENT MANN	
65	Gray Shale	1.0	355 .	*** A ANNOUNCE OF THE PARTY AND	VA (-CAMPAGE)
70	Gray Shale	1.0	360	A so was a solution of the sol	
75		9	±365		
4	Sandstone				Street Land Control of the Control o
. 80		l9	370		
85	Gray Shale	1.4	375		
90		=1.5	-380	The second secon	- AND LOCAL MARKET
. 95		1.5	385		
100	***	1.1	390		
105	Sandstone	.9-	395	* * * * * * * * * * * * * * * * * * * *	,
110		9	.400		
115	Gray Shale	1.4	405		Ţ
-120	The same of the sa	- 1.3	410	Pieto interestati	
125		.1.3	415		
130	Sandstone	.9	420	The state of the s	
135			425		
140	Gray Shale	1.0	430	The second secon	
145	Ciray Ondio	1.1	435	V 20 - 4004- CHERTON CONTRACTOR CONTRACTOR	1-
150	* pera , surreconstitutionesses , , ,	1:2=1	435	ft and again and the management	
	Candatana			The september of the se	·
155	Sandstone	5	445 ==	A CONTRACTOR OF THE PARTY OF TH	
160		.2	450	-s means a recent a	
:165	The second secon		7455	***	
170	An or	:6==-	*460		
175		2	465		
-1B0	AMERICAN CAME	2	470	T accommon a	Was Consumer Co.
. 185		.4	. 475	The same of the sa	7.22
190	1.774	6	, 480	Apply as the promote contract of the contract	
195	and the second s	.9	485	Nicholangi ubborituda radak K	
200	Gray Shale	7-1:32	490	personal security of the secur	
205		1/4	§495:		
210	. Contractive , and tripleton time reconstructive	1.6	500		-1:
-215		1.4	the same of the sa	A CONTRACTOR OF THE PARTY OF TH	
220		1.32			
225		1.3	<u> </u>		
230	T	= 1.3		n minimum da n. n. vinden menderandahan merin K. m.	
235	Auto-Challes Committee Com	1.4	CONTA NA	to white at the first about tabus the destroyer	
.240	* ****	1:4	1		
245	The state of the s	1:0:		Townson or	
		1400			
250	<b>V</b> .	111	* ***		
255	Sandstone:	∴9			
260	Constitution of the second		7777 AND 1	and the second	
265		,9	A print There is no market	proposed Argonalists and	
270		∴9	1		
:275	more and the second sec	= 1.9		-	, ,,,,,,,,,,,,,,,,,,,,,,,,,,,,,,,,,,,,,
280:	Gray Shale	= 1:0=		The same of the same section of the same secti	
265		10.	i	waspannannannannannannannannannannannannann	
, 3		1.0		production of the contract of	
5290 · ·					
290	A TOTAL PROPERTY OF THE PARTY O		<b> </b>		
290 295 300	The second secon	- 1.0			

			1988 - 1989 - 1989 - 1989 - 1989 - 1989 - 1989 - 1989 - 1989 - 1989 - 1989 - 1989 - 1989 - 1989 - 1989 - 1989
ANODE #	DEPTH	NO COKE	COKE
1 .	290	1,0	4.4
. 2	280	1.0	5.4
3	270	9	5.74
4	260	.9	6.0
<u>- 5                                   </u>	250	1.1	6.0
6	240	1.4	6.5
<b>7</b>	230	1.5	6.5
<u>8</u> .	220	1.3	5.8
9	<u>~~ 210</u>	1.6	6.5
10	200	1,3	6.5
11	4	4 4	
12			
13	militar in the inches in		
14	a charge-ord-ope of the		,
15		the state of the s	
			The state of the s
<u> 17</u>			
. 18	<u> </u>		
19			
20			
21	·-	- Marie and Control of the Control o	*
22	MINING AND THE RESERVE OF THE PERSON OF THE		Personant market and a second
23	An An		and a supplemental
24		the selections	Andrewson was
25		Variable in the second	
26	يت - سين		
27		, proces on 1000 T	
28			
29			
30			
N *	Taraba new man debat de se de		

WATER DEPTH: 110' ISOLATION PLUGS: None LOGING VOLTS: 10.95 **VOLT SOURCE: AUTO BATTERY** 

TOTAL AMPS: 13.9


**TOTAL GB RESISTANCE: .78** 


**REMARKS:** 

District I PO Box 1980, Hobbs, NM 88241-1980 State of New Mexico Form C 102 Revised February 21, 1994

Instructions on back
Submit to Appropriate District Office
State Lease - 4 Copies
Fee Lease - 3 Copies Energy, Minerals & Natural Resources Department District II PO Drawer DO, Artesia, NM 88211-0719 OIL CONSERVATION DIVISION PO Box 2088 District III 1000 Pio Brazos Rd. Aztet, NM 87410 Santa Fe. NM 8250422068 13 1 13 AMENDED REPORT District 1V PO 80x 2088, Santa Fe, NM 87504-2088 Reddi RCVD OCT 3 '07 City III III DIL CONS. DIV. WELL LOCATION AND ACREAGE DEDICATION PLAT VICT 5 Pagl Code API Number Popl Name 30 045 72319 / 71599 BLANCO MESAVERDE / BASIN DAKOTA Property Code Property Name Well Number SAN JUAN 32-8 UNIT 31330 16M 'OGRID No \*Doerator Name Elevation 217817 CONOCOPHILLIPS COMPANY 6572 10 Surface Location UL or let no Sect per Foot from the Hertir/South Isla 1090 0 15 31N BW NORTH 1080 WEST SAN JUAN 11 Bottom Hole Location If Different From Surface Ut or lot re. Sect ib ant True Un 1576 918 NORTH E 15 31N RW WEST SAN JUAN diting on motel, to Deducated Acres Consoliutation Code Order sb. 320.0 Acres - W/2NO ALLOWABLE WILL BE ASSIGNED TO THIS COMPLETION UNTIL ALL INTERESTS HAVE BEEN CONSOLIDATED OR A NON-STANDARD UNIT HAS BEEN APPROVED BY THE DIVISION POPERATOR CERTIFICATION 5126.221 I hereby cartify that the information pontained herein is true and complete to the pear of my knowledge and belief 5 1576 pacy NMoner SUPFACE LOCATION LAT: 36.90131 N LONG: 107.66784 W DATUM: NAD1983 Signature Tracey N. Mouroe 1080 Printed Name 3181 "Regulatory Technician Title LEASE 9/28/07 5F-074004 Date "SURVEYOR CERTIFICATION I hereby certify that the well location shown on this plat was plotted from field notes of actual aways made on me or unday supervision and onet the same is true and connect to the base of ny agile? 8 5204 in Survey Date: SEPTEMBER 29, 2005 Signature and Saul of Professional Surveyor SON C. EDWARD LEASE USA NM-03402 DWARDS 5237.10 Certificate Number 15269

The above information to true and correct to the best of my knowledge.

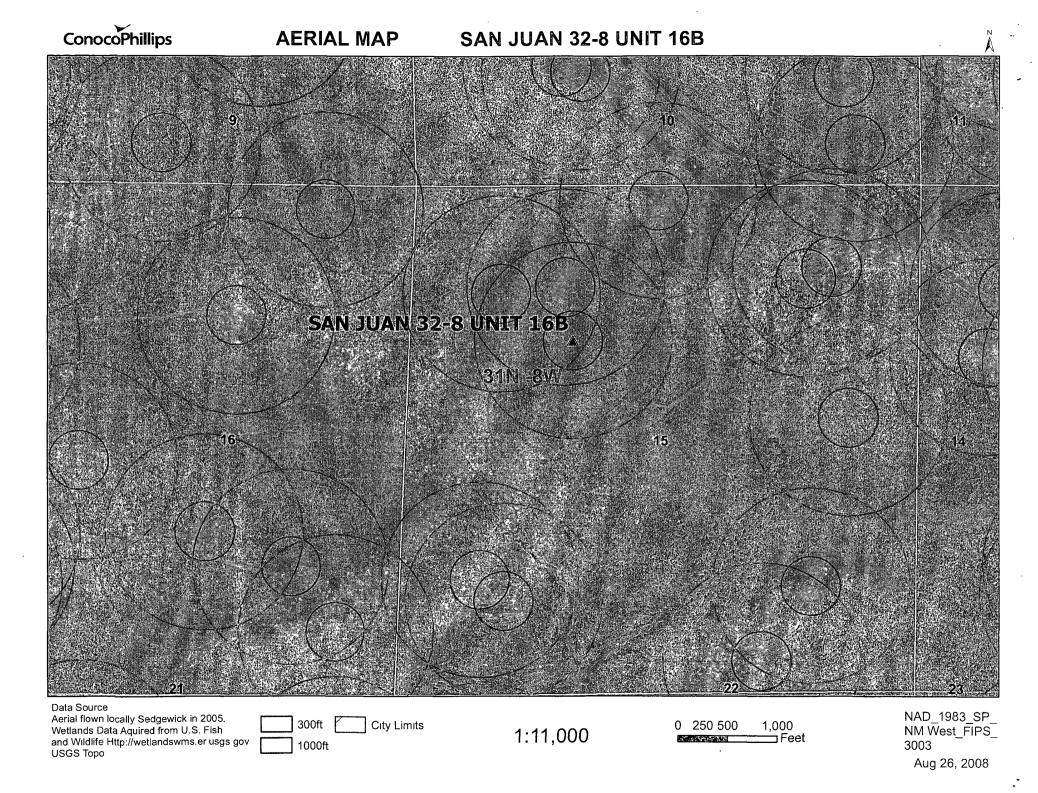

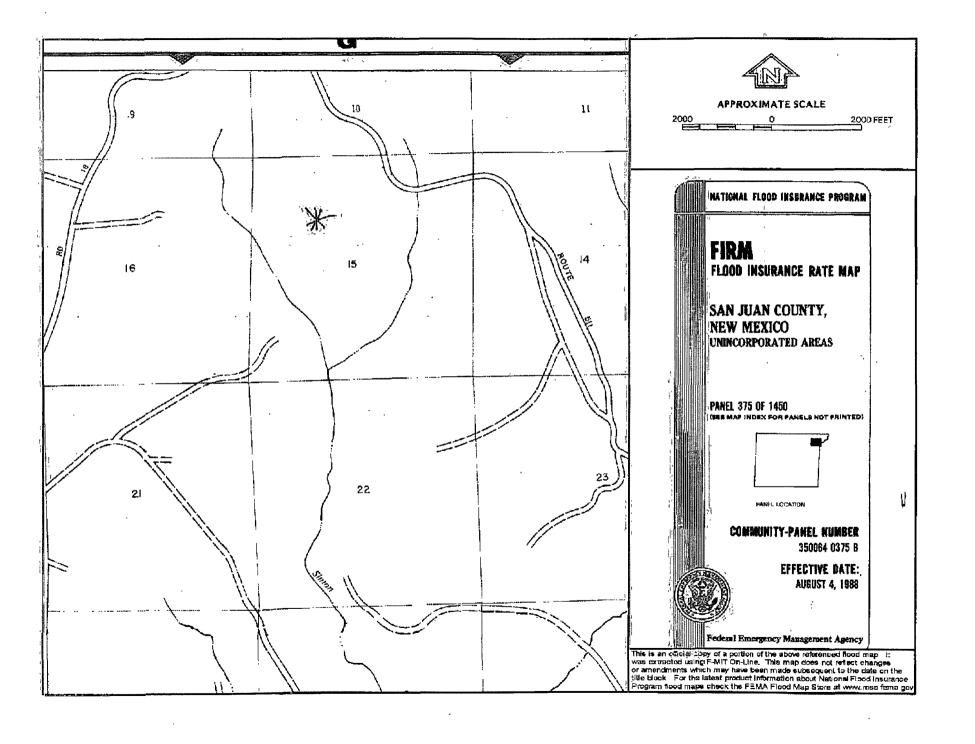

#### Siting Criteria Compliance Demonstration & Hydro Geologic Analysis

The San Juan 32-8 Unit 16B is not located in an unstable area. The location is not over a mine and is not on the side of a hill as indicated on the Mines, Mills and Quarries Map and Topographic Map. The location of the excavated pit material will not be located within 300' of any continuously flowing watercourse or 200' from any other watercourse as indicated on the Topographic Map. The location is not within a 100-year floodplain area as indicated on the FEMA Map. The Cathodic well data from the San Juan 32-8 Unit 16M has an elevation of 6572' and groundwater depth of 110'. The subject well has an elevation of 6567' which is 5' less than the San Juan 32-8 Unit 16M, therefore the groundwater depth is greater than 105'. There are no iWATERS data points located in the area as indicated on the TOPO Map. The hydro geologic analysis indicates the groundwater depth and the San Jose formation will create a stable area for this new location.

#### Regional Hydrogeological context:

The San Jose Formation of Eocene age occurs in New Mexico and Colorado, and its outcrop forms the land surface over much of the eastern half of the central basin. It overlies the Nacimiento Formation in the area generally south of the Colorado-New Mexico State line and overlies the Animas Formation in the area generally north of the State line.

The San Jose Formation was deposited in various fluvial-type environments. In general, the unit consists of an interbedded sequence of sandstone, siltstone, and variegated shale. Thickness of the San Jose Formation generally increases from west to east (200 feet in the west and south to almost 2,700 feet in the center of the structural basin). Ground water is associated with alluvial and fluvial sandstone aquifers. Thus, the occurrence of ground water is mainly controlled by the distribution of sandstone in the formation. The distribution of such sandstone is the result of original depositional extent plus any post-depositional modifications, namely erosion and structural deformation. Transmissivity data for San Jose Formation are minimal. Values of 40 and 120 feet squared per day were determined from two aquifer tests (Stone et al, 1983, table 5). The reported or measured discharge from 46 water wells completed in San Jose Formation ranges from 0.15 to 61 gallons per minute and the median is 5 gallons per minute. Most of the wells provide water for livestock and domestic use.

The San Jose Formation is a very suitable unit for recharge from precipitation because soils that form on the unit are sandy and highly permeable and therefore readily adsorb precipitation. However, low annual precipitation, relatively high transpiration and evaporation rates, and deep dissection of the San Jose Formation by the San Juan River and its tributaries all tend to reduce the effective recharge to the unit.

Stone et al., 1983, Hydrogeology and Water Resources of the San Juan Basin, New Mexico: Socorro, New Mexico Bureau of Mines and Mineral Resources Hydrologic Report 6, 70 p.

#### Tally, Ethel

From:

Tally, Ethel

Sent:

Wednesday, February 25, 2009 1:07 PM

To:

'mark\_kelly@nm.blm.gov'

Cc:

Sessions, Tamra D

Subject:

PIT CLOSURE NOTIFICATION

The following temporary pits will be closed on-site. The new OCD Pit Rule 17 requires the surface lowner be notified.

Allison Unit 40N San Juan 31-6 Unit 7M ERNG A 1B San Juan B2-8 Unit 16Ba

The following locations will have a temporary pits that will be closed on site.

Lewis Park 1M

Please call Tamra Session (X9834) or myself (X4027) if you have guestions or concerns.

Thank You,

Ethel Tally ConocoPhillips:SJBU 3401 E. 30th Farmington NM 87402 (505)599-4027 Ethel Tally@ConocoPhillps.com District I

1625 N. French Dr., Hobbs, NM 88240

District I

1301 W. Grand Avenue, Artesia, NM 88210

District III

1000 Rio Brazos Rd., Aztec, NM 87410

District IV

1220 S. St. Francis Dr., Sunta Fe, NM 87505

State of New Mexico
Energy, Minerals & Natural Resources Department
OIL CONSERVATION DIVISION
1220 South St. Francis Dr.
Santa Fe, NM 87505

Form C-102
Revised October 12, 2005
Submit to Appropriate District Office

State Lease - 7 Copies
Fee Lease - 3 Copies

AMMENDED REPORT

#### WELL LOCATION AND ACREAGE DEDICATION PLAT

I A	Pl Number		2	Pool Code				ool Name SAVERDE		
4 Property Coo	le ·	ಎ. <i>ತ</i>		5 Property Name SAN JUAN 32-8 UNIT					<sup>6</sup> Well Number 16B	
7 OGRID N	о.			* Operator Name CONOCOPHILLIPS COMPANY					<sup>9</sup> Elevation 6567	
	•				10 SURFACE	LOCATION		***	•	
JL or let no. F	Section 15	Township 31-N	Range 8-W	Let Ide	Feet from the 1570	North/South line NORTH	Feet from the 1645	East/West line WEST	County SAN JUAN	
			<sup>11</sup> E	ottom H	ole Location	If Different Fro	m Surface		<del> </del>	
IL or lat no. K	Section 15	Township 31-N	Range 8-W		Feet from the 2200	North/South line SOUTH	Feet from the 2200	East/West line WEST	County SAN JUAN	
<sup>2</sup> Dedicated Acres 320	13 Juint	or Infili	Consolidation	Code 13	Order No.			·		

NO ALLOWABLE WILL BE ASSIGNED TO THIS COMPLETION UNTIL ALL INTERESTS HAVE BEEN CONSOLIDATED OR A NON-STANDARD UNIT HAS BEEN APPROVED BY THE DIVISION

and the second s			
N 89'21'48" E 256' S 89'28'00" W 256' S 69'28'00" W 256' S 69'28'00" W 256' S 69' S	563.1' (M) 563.1' (R)	,	17 OPERATOR CERTIFICATION  I haveby certify that the information commained herein is true and complete to the best of my knowledge and belief, and that this organization either owns a warking interest or unleased mineral interest in the land including the proposed bottom hale location or has a right to drift this well at this location purement a contract with an owner of such a mineral or working interest, or to a voluntary poaling agreement or a compulsory poaling order heretofore entered by the division.
1645'	Company of the Compan	WELL FLAG NAD 83 LAT: 36.900002* N	Signature  Printed Name
NW/4 DEDICATED ACREAG SF-079004	GE	LAT: 35.500002-N LONG: 107.665963* W NAD: 27 LAT:36°53.999864' N LONG: 107°39.920996' W	Title and E-mail Address
a processor access constants		Agents agent to a regard to a	18 SURVEYOR CERTIFICATION  1 hereby certify that the well location shown on this plat
	ta tana tananan da ta	BOTTOM HOLE NAD 83	was planted from fella notes of actual surveys made by me or under my supervision, and that the same is true and correct to the best of my britisf.
SW/4 DEDICATED ACREAC NM-03402 SECTION 15, T-31-N, R-8-W	IGE	LAT: 36.896115" N LONG: 107.664254" W NAD 27 LAT:36"53.766628" N LONG: 107"39.818468' W	Date of Survey: 12/18/07 Signature and Seal of Professional Surveyor:
W 216'00' E	2200'		
S 89'23'60" W N 88'15'17" E		5237.1' (R) 5237.0' (M)	Certificate Number: No PROPESSIONAL

<u> 왕</u>민.

SHALLOW

ABOVE

WIDE AND

(CVERFLOW-3

305

ABOVE

ద

RESERVE


4

CONSTRUCTION

9

PRIOR

#### SAN JUAN 32-8 UNIT 16B

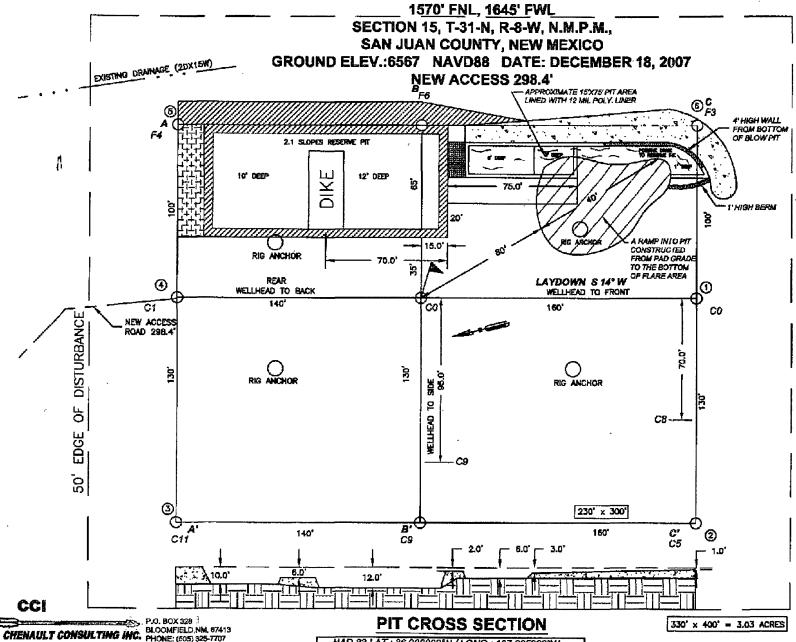


NAD 83 LAT.: 36.900002°N/LONG.: 107.665963°W

NOTES

#### **CONOCOPHILLIPS COMPANY**

SAN JUAN 32-8 UNIT 16B == 1570' FNL, 1645' FWL
SECTION 15, T-31-N, R-8-W, N.M.P.M.,
SAN JUAN COUNTY, NEW MEXICO
ELEV.: 6567 NAVD88

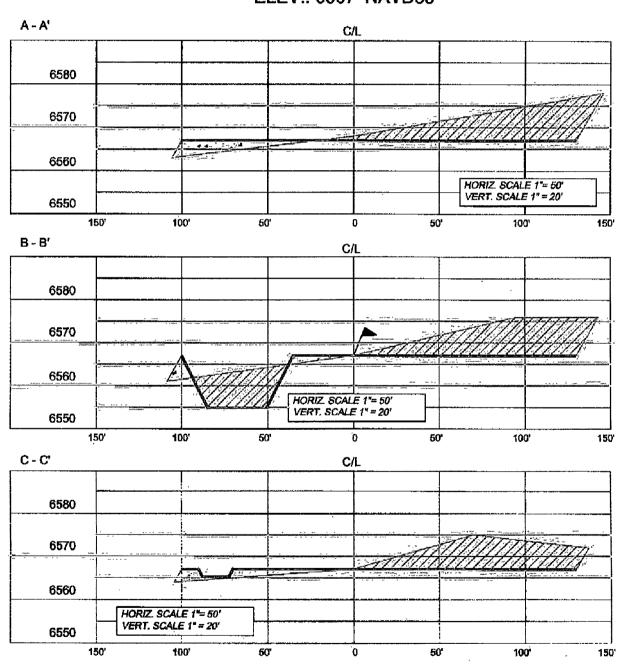

NOTE: CCI IS NOT LIABLE FOR UNDERGROUND U	TILIT ES
OR PIPELINES.	

CONTRACTOR SHOULD CALL ONE-CALL FOR LOCATION OF ANY MARKED OR UNMARKED BURIED PIPELINES OR CABLES ON WELL PAD AND OR ACCESS ROAD PRIOR TO CONSTRUCTION.

, recrisions						
NO.	DESCRIPTION	REVISED BY	DATE			
1	ISSUE FOR REVIEW	£.H.	12/19/07			
	•	F)				
		•	Ĭ			
. 1		1				

CCI

P.O. BOX 328 BLOOMFIELD,NM, 87413 PHONE: (608)328-7707

CHENAULT CONSULTING ING.

## ConocoPhillips Company San Juan Basin Closure Plan

In accordance with Rule 19.15.17.12 NMAC the following information describes the closure requirements of temporary pits on ConocoPhillips Company (COPC) locations. This is COPC's standard procedure for all temporary pits. A separate plan will be submitted for any temporary pit which does not conform to this plan.

All closure activities will include proper documentation and be available for review upon request and will be submitted to OCD within 60 days of closure of pit closure. Closure report will be filed on C-144 and incorporate the following:

- Details on Capping and Covering, where applicable.
- Plot Plan (Pit Diagram)
- Inspection Reports
- Sampling Results
- C~105
- Copy of Deed Notice will be filed with County Clerk

#### General Plan:

- All free standing liquids will be removed at the start of the pit closure process from the pit and disposed of in a division-approved facility or recycle, reuse or reclaim the liquids in a manner that the appropriate division district office approves. The facilities to be used will be Basin Disposal (Permit #NM-01-005) and Envirotech Land Farm (Permit #NM-01-011)
- 2. The preferred method of closure for all temporary pits will be on-site burial, assuming that all the criteria listed in sub-section (B) of 19.15.17.13 are met.
- The surface owner shall be notified of COPC's closing of the temporary pit prior to closure as per the approved closure plan via certified mail, return receipt requested.
- 4. Within 6 months of the Rig Off status occurring COPC will ensure that temporary pits are closed, re-contoured, and reseeded.
- 5. Notice of Closure will be given prior to the Aztec Division office between 72 hours and one week via email, or verbally. The notification of closure will include the following:
  - i. Operator's name
  - Location by Unit Letter, Section, Township, and Range. Well name and API number.
- 6. Liner of temporary pit shall be removed above "mud level" after stabilization. Removal of liner will consist of manually or mechanically cutting liner at mud level and removing all remaining liner. Care will be taken to remove "All" of the liner i.e., edges of liner entrenched or buried. All excessive liner will be disposed of at the San Juan County Landfill located on CR 3100.
- 7. Pit contents shall be mixed with non-waste containing, earthen material in order to achieve the solidification process. The solidification process will be accomplished using a combination of natural drying and mechanically mixing. Pit contents will be mixed with non-waste, earthen material to a consistency that is deemed a safe and stable. The mixing ratio shall not exceed 3 parts clean soil to 1 part pit contents.
- 8. A five point composite sample will be taken of the pit using sampling tools and all samples tested per Subsection B of 19.15.17.13(B)(1)(b). In the event that the criteria are not met, all contents will be handled per Subparagraph (a) of Paragraph (1) of Subsection B of 19.15.17.13 i.e., Dig and haul.

Components	Tests Method	Limit (mg/Kg)
Benzene	EPA SW-846 8021B or 8260B	0.2
BTEX	EPA SW-846 8021B or 8260B	50
TPH	EPA SW-846 418.1	2500
GRO/DRO	EPA SW-846 8015M	500_
Chlorides	EPA 300.1	1000(500)

9. A five point composite sample will be taken from the cavitation pit pursuant to 19.15.17.13(B)(1)(b)(i) in order to assure there has not been any type of release.

Components	Tests Method	Limit (mg/Kg)	
Benzene	EPA SW-846 8021B or 8260B	0.2	
BTEX	EPA SW-846 8021B or 8260B	50	
TPH	EPA SW-846 418.1	2500	
GRO/DRO EPA SW-846 8015M		500	
Chlorides	EPA 300.1	500	

- Upon completion of solidification and testing standards being passed, the pit area will be backfilled with compacted non-waste containing, earthen material. A minimum of four feet of cover shall be achieved and the cover shall include one foot of suitable material to establish vegetation at the site, or the background thickness of topsoil, whichever is greater. If standard testing fails COPC will dig and haul all contents pursuant to 19.15.17.13.i.a. After doing such, confirmation sampling will be conducted to ensure a release has not occurred.
- 11. During the stabilization process if the liner is ripped by equipment the Aztec OCD office will be notified within 48 hours and the liner will be repaired if possible. If the liner can not be repaired then all contents will be excavated and removed.
- 12. Dig and Haul Material will be transported to the Envirotech Land Farm located 16 miles south of Bloomfield on Angel Peak Road, CR 7175. Permit # NM010011
- 13. Re-contouring of location will match fit, shape, line, form and texture of the surrounding. Re-shaping will include drainage control, prevent ponding, and prevent erosion. Natural drainages will be unimpeded and water bars and/or silt traps will be place in areas where needed to prevent erosion on a large scale. Final re-contour shall have a uniform appearance with smooth surface, fitting the natural landscape.
- 14. Notification will be sent to OCD when the reclaimed area is seeded.
- 15. COPC shall seed the disturbed areas the first growing season after the operator closes the pit. Seeding will be accomplished via drilling on the contour whenever practical or by other division-approved methods. BLM or Forest Service stipulated seed mixes will used on federal lands. Vegetative cover will equal 70% of the native perennial vegetative cover (un-impacted) consisting of at least three native plant species, including at least one grass, but not including noxious weeds, and maintain that cover through two successive growing seasons. Repeat seeding or planting will be continued until successful vegetative growth occurs.

Туре	Variety or Cultivator	PLS/A
Western wheatgrass	Arriba	3.0
Indian ricegrass	Paloma or Rimrock	3.0
Slender wheatgrass	San Luis	2.0
Crested wheatgrass	Hy-crest	3.0
Bottlebrush Squirreltail	Unknown	2.0
Four-wing Saltbrush	Delar	.25

Species shall be planted in pounds of pure live seed per acre: Present Pure Live Seed (PLS) = Purity X Germination/100

Two lots of seed can be compared on the basis of PLS as follows:

Source No. One (poor quality) Source No. two (better quality) **Purity Purity** 50 percent 80 percent Germination 40 percent Germination 63 percent Percent PLS Percent PLS 20 percent 50 percent

5 lb. bulk seed required to make 2 lb. bulk seed required to make 1 lb. PLS 1 lb. PLS

16. The temporary pit will be located with a steel marker, no less than four inches in diameter, cemented in a hole three feet deep in the center of the onsite burial upon the abandonment of all the wells on the pad. The marker will be flush with the ground to allow access of the active well pad and for safety concerns. The marker will include a threaded collar to be used for future abandonment. The top of the marker will contain a welded steel 12" square plate that indicates the onsite burial of the temporary pit. The plate will be easily removable and a four foot tall riser will be threaded into the top of the collar marker and welded around the base with the operator's information at the time of all wells on the pad are abandoned. The operator's information will include the following: Operator Name, Lease Name, Well Name and number, Unit Number, Section, Township, Range and an indicator that the marker is an onsite burial location.