

Submit 3 Copies To Appropriate District Office
District I
1625 N French Dr, Hobbs, NM 88240
District II
1301 W Grand Ave, Artesia, NM 88210
District III
1000 Rio Brazos Rd, Aztec, NM 87410
District IV
1220 S St Francis Dr., Santa Fe, NM 87505

State of New Mexico
Energy, Minerals and Natural Resources

Form C-103
June 19, 2008

OIL CONSERVATION DIVISION
1220 South St. Francis Dr.
Santa Fe, NM 87505
JUN 18 2009

WELL API NO. 30-045-25094
5. Indicate Type of Lease STATE <input type="checkbox"/> FEE <input checked="" type="checkbox"/>
6. State Oil & Gas Lease No.
7. Lease Name or Unit Agreement Name Aunt Maggie
8. Well Number 3
9. OGRID Number 13931
10. Pool name or Wildcat Aztec Fruitland
11. Elevation (Show whether DR, RKB, RT, GR, etc.) 5597' GR

SUNDRY NOTICES AND REPORTS ON WELLS
(DO NOT USE THIS FORM FOR PROPOSALS TO DRILL OR TO DEEPEN OR PLUG BACK TO A DIFFERENT RESERVOIR USE "APPLICATION FOR PERMIT" (FORM C-101) FOR SUCH PROPOSALS)

1. Type of Well: Oil Well ☐ Gas Well ☒ Other

2. Name of Operator
Manana Gas Company

3. Address of Operator c/o Walsh Engineering
7415 East Main Street, Farmington, NM 87402

4. Well Location
Unit Letter J : 1600 feet from the South line and 1700 feet from the East line
Section 25 Township 29N Range 11W NMPM San Juan County

12. Check Appropriate Box to Indicate Nature of Notice, Report or Other Data

NOTICE OF INTENTION TO:

PERFORM REMEDIAL WORK ☐ PLUG AND ABANDON ☒
TEMPORARILY ABANDON ☐ CHANGE PLANS ☐
PULL OR ALTER CASING ☐ MULTIPLE COMPL ☐
DOWNHOLE COMMINGLE ☐

SUBSEQUENT REPORT OF:

REMEDIAL WORK ☐ ALTERING CASING ☐
COMMENCE DRILLING OPNS. ☐ P AND A ☐
CASING/CEMENT JOB ☐

OTHER: ☐

OTHER: ☐

13. Describe proposed or completed operations. (Clearly state all pertinent details, and give pertinent dates, including estimated date of starting any proposed work). SEE RULE 1103. For Multiple Completions: Attach wellbore diagram of proposed completion or recompletion.

Manana Gas Company proposes to plug and abandon this well in the following manner.

Pull the 1" tubing. Remove the tubinghead. Connect a cement truck directly to the 2-7/8" casing. Fill the entire casing from PBTD at 1908' to the surface with approximately 53 sx (63 cu.ft) of Type 5 cement with 1/4 #/sx celloflake and 3% CaCl2. Pump cement until the hole stands full.

Cut off the wellhead and install a P&A marker. Reclaim the location as per the surface owner specifications.

RCVD JUN 23 '09
OIL CONS. DIV.
DIST. 3

Spud Date: 7/13/81

Rig Release Date: 7/18/81

I hereby certify that the information above is true and complete to the best of my knowledge and belief.

SIGNATURE Paul C. Thompson TITLE Agent / Engineer DATE 6/16/09

Type or print name Paul C. Thompson, P.E. E-mail address: paul@walsheng.net PHONE: 505-327-4892

For State Use Only

APPROVED BY: Kelly G. Korte TITLE Deputy Oil & Gas Inspector, District #3 DATE JUL 09 2009
Conditions of Approval (if any):

B



42-381 50 SHEETS 5 SQUARE
42-382 100 SHEETS 5 SQUARE
42-389 200 SHEETS 5 SQUARE
Made in U.S.A.

MANANA Gas Company
Aunt Maggie #3
1600 FSL & 1700 FEL (J)
SECTION 25, T29N, R11W

CURRENT STATUS

P&A STATUS

7" HOLE

5 1/2", 15.5" @ 161'
CMT W/ 50 SX


DUB ALAND - 635
KIRTLAND - 760

744 #1
535X (63 cu ft)
1908' TO SURFACE

1" TUBING
DEPTH UNKNOWN

PICTURED CLIFFS
1787'

FRUITLAND SAND PERMS
1603-1628' @ 25 pf
P8TD @ 1908'
2 7/8, 6.5" @ 1943'
CMT W/ 155 SX

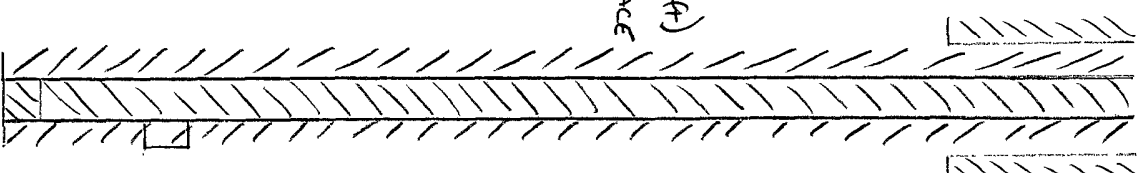

6/16/09
Tcf