<u>District I</u> 1625 N. French Dr., Hobbs, NM 88240 District II

1301 W. Grand Avenue, Artesia, NM 88210

District III 1000 Rio Brazos Road, Aztec, NM 87410 District IV 1220 S. St Francis Dr , Santa Fe, NM 87505

State of New Mexico Energy Minerals and Natural Resources Department Oil Conservation Division 1220 South St. Francis Dr. Santa Fe, NM 87505

For temporary pits, closed-loop systems, and below-grade tanks, submit to the appropriate NMOCD District Office

For permanent pits and exceptions submit to the Santa Fe Environmental Bureau office and provide a copy to the appropriate NMOCD District Office.

2	∻ ~	15
\Box	O_{c}	ナこ

Pit Closed I can System Relaxy Grade Tank or

Proposed Alternative Method Permit or Closure Plan Application
Type of action: Permit of a pit, closed-loop system, below-grade tank, or proposed alternative method Closure of a pit, closed-loop system, below-grade tank, or proposed alternative method Modification to an existing permit Closure plan only submitted for an existing permitted or non-permitted pit, closed-loop system, below-grade tank, or proposed alternative method
Instructions: Please submit one application (Form C-144) per individual pit, closed-loop system, below-grade tank or alternative request
Please be advised that approval of this request does not relieve the operator of liability should operations result in pollution of surface water, ground water or the
environment. Nor does approval relieve the operator of its responsibility to comply with any other applicable governmental authority's rules, regulations or ordinances
1. Operator: Jicarilla Apache Energy Corp (JAECO) OGRID #: 11589
Address: P.O. Box 710 Dulce, New Mexico 87458
Facility or well name: JAECO 28-3 No. 3
API Number: 30-039-30010 OCD Permit Number:
U/L or Qtr/Qtr L Section 25 Township 28N Range 3W County: Rio Arriba
Center of Proposed Design: ~ 93' S74W of Latitude 36.60804 deg N Longitude -107.10885 deg W NAD ☐ 1927 ☐ 1983
Surface Owner: Federal State Private Tribal Trust or Indian Allotment
2. ☑ <u>Pit</u> : Subsection F or G of 19.15.17.11 NMAC
Temporary. 🛮 Drilling 🔲 Workover
Permanent Emergency Cavitation P&A
☐ Lined ☐ Unlined Liner type: Thickness 20 mil ☐ LLDPE ☐ HDPE ☐ PVC ☐ Other
☐ String-Reinforced
Liner Seams: Welded Factory Other Volume: ~8,900 bbl Dimensions: L 125' x W 75' x D 10'
Closed-loop System: Subsection H of 19.15.17.11 NMAC
Type of Operation: P&A Drilling a new well Workover or Drilling (Applies to activities which require prior approval of a permit or notice of intent)
☐ Drying Pad ☐ Above Ground Steel Tanks ☐ Haul-off Bins ☐ Other
☐ Lined ☐ Unlined Liner type: Thicknessmil ☐ LLDPE ☐ HDPE ☐ PVC ☐ Other
Liner Seams:
/8 HECEIVED 3
Below-grade tank: Subsection I of 19.15.17.11 NMAC
Volume:bbl Type of fluid: \\ \\ \\ \\ \\ \\ \\ \\ \\ \\ \
Tank Construction material:
Secondary containment with leak detection Visible sidewalls, liner, 6-inch lift and automatic overflow shut-off
☐ Visible sidewalls and liner ☐ Visible sidewalls only ☐ Other
Liner type: Thicknessmil
5.
Alternative Method:

Submittal of an exception request is required. Exceptions must be submitted to the Santa Fe Environmental Bureau office for consideration of approval.

Fencing: Subsection D of 19 15 17.11 NMAC (Applies to permanent pits, temporary pits, and below-grade tanks) Chain link, six feet in height, two strands of barbed wire at top (Required if located within 1000 feet of a permanent residence, school, hospital, institution or church) Four foot height, four strands of barbed wire evenly spaced between one and four feet Alternate. Please specify 4' hogwire fence with a single strand of barbed wire on top.				
Netting: Subsection E of 19 15 17 11 NMAC (Applies to permanent pits and permanent open top tanks) Screen Netting Other Monthly inspections (If netting or screening is not physically feasible)				
Signs: Subsection C of 19.15.17.11 NMAC ☐ 12"x 24", 2" lettering, providing Operator's name, site location, and emergency telephone numbers ☐ Signed in compliance with 19.15.3.103 NMAC				
Administrative Approvals and Exceptions: Justifications and/or demonstrations of equivalency are required. Please refer to 19.15.17 NMAC for guidance. Please check a box if one or more of the following is requested, if not leave blank: Administrative approval(s): Requests must be submitted to the appropriate division district or the Santa Fe Environmental Bureau office for consideration of approval Exception(s): Requests must be submitted to the Santa Fe Environmental Bureau office for consideration of approval.				
Siting Criteria (regarding permitting): 19.15.17.10 NMAC Instructions: The applicant must demonstrate compliance for each siting criteria below in the application. Recommendations of acceptable source material are provided below. Requests regarding changes to certain siting criteria may require administrative approval from the appropriate district office or may be considered an exception which must be submitted to the Santa Fe Environmental Bureau office for consideration of approval. Applicant must attach justification for request. Please refer to 19.15.17.10 NMAC for guidance. Siting criteria does not apply to drying pads or above-grade tanks associated with a closed-loop system.				
Ground water is less than 50 feet below the bottom of the temporary pit, permanent pit, or below-grade tank. - NM Office of the State Engineer - iWATERS database search; USGS; Data obtained from nearby wells	☐ Yes ☑ No			
Within 300 feet of a continuously flowing watercourse, or 200 feet of any other significant watercourse or lakebed, sinkhole, or playa lake (measured from the ordinary high-water mark). - Topographic map; Visual inspection (certification) of the proposed site	☐ Yes ☑ No			
Within 300 feet from a permanent residence, school, hospital, institution, or church in existence at the time of initial application. (Applies to temporary, emergency, or cavitation pits and below-grade tanks) - Visual inspection (certification) of the proposed site, Aerial photo, Satellite image	Yes No			
Within 1000 feet from a permanent residence, school, hospital, institution, or church in existence at the time of initial application. (Applies to permanent pits) - Visual inspection (certification) of the proposed site; Aerial photo; Satellite image	☐ Yes ☑ No ☐ NA			
Within 500 horizontal feet of a private, domestic fresh-water well or spring that less than five households use for domestic or stock watering purposes, or within 1000 horizontal feet of any other fresh water well or spring, in existence at the time of initial application. - NM Office of the State Engineer - iWATERS database search, Visual inspection (certification) of the proposed site	☐ Yes ⊠ No			
Within incorporated municipal boundaries or within a defined municipal fresh water well field covered under a municipal ordinance adopted pursuant to NMSA 1978, Section 3-27-3, as amended. - Written confirmation or verification from the municipality, Written approval obtained from the municipality	☐ Yes ☑ No			
Within 500 feet of a wetland. - US Fish and Wildlife Wetland Identification map; Topographic map; Visual inspection (certification) of the proposed site	☐ Yes ☑ No			
Within the area overlying a subsurface mine. - Written confirmation or verification or map from the NM EMNRD-Mining and Mineral Division	☐ Yes ☑ No			
Withm an unstable area. - Engineering measures incorporated into the design, NM Bureau of Geology & Mineral Resources, USGS; NM Geological Society; Topographic map	☐ Yes ☑ No			
Within a 100-year floodplain FEMA map	☐ Yes ☑ No			

Temporary Pits, Emergency Pits, and Below-grade Tanks Permit Application Attachment Checklist: Subsection B of 19.15.17.9 NMAC Instructions: Each of the following items must be attached to the application. Please indicate, by a check mark in the box, that the documents are attached. ☐ Hydrogeologic Report (Below-grade Tanks) - based upon the requirements of Paragraph (4) of Subsection B of 19.15.17.9 NMAC ☐ Hydrogeologic Data (Temporary and Emergency Pits) - based upon the requirements of Paragraph (2) of Subsection B of 19.15.17.9 NMAC ☐ Siting Criteria Compliance Demonstrations - based upon the appropriate requirements of 19.15.17.10 NMAC ☐ Design Plan - based upon the appropriate requirements of 19.15.17.11 NMAC ☐ Operating and Maintenance Plan - based upon the appropriate requirements of 19.15.17.12 NMAC ☐ Closure Plan (Please complete Boxes 14 through 18, if applicable) - based upon the appropriate requirements of Subsection C of 19 15.17.9 NMAC and 19.15.17.13 NMAC
Previously Approved Design (attach copy of design) API Number: or Permit Number
12.
Closed-loop Systems Permit Application Attachment Checklist: Subsection B of 19.15.17.9 NMAC Instructions: Each of the following items must be attached to the application. Please indicate, by a check mark in the box, that the documents are attached.
Geologic and Hydrogeologic Data (only for on-site closure) - based upon the requirements of Paragraph (3) of Subsection B of 19.15.17.9 Siting Criteria Compliance Demonstrations (only for on-site closure) - based upon the appropriate requirements of 19.15.17.10 NMAC Design Plan - based upon the appropriate requirements of 19.15.17.11 NMAC
Operating and Maintenance Plan - based upon the appropriate requirements of 19.15.17.12 NMAC Closure Plan (Please complete Boxes 14 through 18, if applicable) - based upon the appropriate requirements of Subsection C of 19.15.17.9 NMAC and 19.15.17.13 NMAC
Previously Approved Design (attach copy of design) API Number:
Previously Approved Operating and Maintenance Plan API Number. (Applies only to closed-loop system that use
above ground steel tanks or haul-off bins and propose to implement waste removal for closure)
Permanent Pits Permit Application Checklist: Subsection B of 19.15.17.9 NMAC Instructions: Each of the following items must be attached to the application. Please indicate, by a check mark in the box, that the documents are attached. Hydrogeologic Report - based upon the requirements of Paragraph (1) of Subsection B of 19.15.17.9 NMAC Siting Criteria Compliance Demonstrations - based upon the appropriate requirements of 19.15.17.10 NMAC Climatological Factors Assessment Certified Engineering Design Plans - based upon the appropriate requirements of 19.15.17.11 NMAC Dike Protection and Structural Integrity Design - based upon the appropriate requirements of 19.15.17.11 NMAC Leak Detection Design - based upon the appropriate requirements of 19.15.17.11 NMAC Liner Specifications and Compatibility Assessment - based upon the appropriate requirements of 19.15.17.11 NMAC Quality Control/Quality Assurance Construction and Installation Plan Operating and Maintenance Plan - based upon the appropriate requirements of 19.15.17.12 NMAC Freeboard and Overtopping Prevention Plan - based upon the appropriate requirements of 19.15.17.11 NMAC Nuisance or Hazardous Odors, including H ₂ S, Prevention Plan Emergency Response Plan Oil Field Waste Stream Characterization Monitoring and Inspection Plan Erosion Control Plan Closure Plan - based upon the appropriate requirements of Subsection C of 19.15.17.9 NMAC and 19.15.17.13 NMAC
Proposed Closure: 19.15.17.13 NMAC Instructions: Please complete the applicable boxes, Boxes 14 through 18, in regards to the proposed closure plan.
Type: Drilling Workover Emergency Cavitation P&A Permanent Pit Below-grade Tank Closed-loop System Alternative Proposed Closure Method: Waste Excavation and Removal Waste Removal (Closed-loop systems only) On-site Closure Method (Only for temporary pits and closed-loop systems) In-place Burial On-site Trench Burial Alternative Closure Method (Exceptions must be submitted to the Santa Fe Environmental Bureau for consideration)
Waste Excavation and Removal Closure Plan Checklist: (19.15.17.13 NMAC) Instructions: Each of the following items must be attached to the closure plan. Please indicate, by a check mark in the box, that the documents are attached. □ Protocols and Procedures - based upon the appropriate requirements of 19.15.17.13 NMAC □ Confirmation Sampling Plan (if applicable) - based upon the appropriate requirements of Subsection F of 19.15.17.13 NMAC □ Disposal Facility Name and Permit Number (for liquids, drilling fluids and drill cuttings) □ Soil Backfill and Cover Design Specifications - based upon the appropriate requirements of Subsection H of 19.15 17.13 NMAC □ Re-vegetation Plan - based upon the appropriate requirements of Subsection G of 19.15.17.13 NMAC

Waste Removal Closure For Closed-loop Systems That Utilize Above Ground Instructions: Please indentify the facility or facilities for the disposal of liquids, facilities are required.		
Disposal Facility Name:	Disposal Facility Permit Number:	
Disposal Facility Name:		
Will any of the proposed closed-loop system operations and associated activities of ☐ Yes (If yes, please provide the information below) ☐ No	cur on or in areas that will not be used for future serv	vice and operations?
Required for impacted areas which will not be used for future service and operatio Soil Backfill and Cover Design Specifications based upon the appropriate Re-vegetation Plan - based upon the appropriate requirements of Subsection Site Reclamation Plan - based upon the appropriate requirements of Subsection	e requirements of Subsection H of 19.15.17.13 NMAC I of 19.15.17.13 NMAC	C
Siting Criteria (regarding on-site closure methods only): 19.15.17.10 NMAC Instructions: Each siting criteria requires a demonstration of compliance in the provided below. Requests regarding changes to certain siting criteria may require considered an exception which must be submitted to the Santa Fe Environmental demonstrations of equivalency are required. Please refer to 19.15.17.10 NMAC)	e administrative approval from the appropriate disti l Bureau office for consideration of approval. Justi	rict office or may be
Ground water is less than 50 feet below the bottom of the buried waste. - NM Office of the State Engineer - iWATERS database search; USGS; Data	a obtained from nearby wells	☐ Yes ☑ No ☐ NA
Ground water is between 50 and 100 feet below the bottom of the buried waste - NM Office of the State Engineer - iWATERS database search, USGS, Data	a obtained from nearby wells	☐ Yes ☑ No ☐ NA
Ground water is more than 100 feet below the bottom of the buried waste. - NM Office of the State Engineer - iWATERS database search; USGS; Data	a obtained from nearby wells	⊠ Yes □ No □ NA
Within 300 feet of a continuously flowing watercourse, or 200 feet of any other sig lake (measured from the ordinary high-water mark). - Topographic map; Visual inspection (certification) of the proposed site	nificant watercourse or lakebed, sinkhole, or playa	☐ Yes ☑ No
Within 300 feet from a permanent residence, school, hospital, institution, or church - Visual inspection (certification) of the proposed site; Aerial photo; Satellite		☐ Yes ☑ No
Within 500 horizontal feet of a private, domestic fresh water well or spring that less watering purposes, or within 1000 horizontal feet of any other fresh water well or some NM Office of the State Engineer - iWATERS database; Visual inspection (pring, in existence at the time of initial application.	☐ Yes ☑ No
Within incorporated municipal boundaries or within a defined municipal fresh water adopted pursuant to NMSA 1978, Section 3-27-3, as amended. Written confirmation or verification from the municipality; Written approve	-	☐ Yes ☑ No
Within 500 feet of a wetland US Fish and Wildlife Wetland Identification map; Topographic map; Visua	al inspection (certification) of the proposed site	☐ Yes ☑ No
Within the area overlying a subsurface mine Written confirmation or verification or map from the NM EMNRD-Mining	g and Mineral Division	☐ Yes ☑ No
Within an unstable area. - Engineering measures incorporated into the design; NM Bureau of Geology Society; Topographic map	y & Mineral Resources; USGS; NM Geological	☐ Yes ☑ No
Within a 100-year floodplain FEMA map		☐ Yes ☑ No
18. On-Site Closure Plan Checklist: (19.15 17.13 NMAC) Instructions: Each of th	e following items must be attached to the closure pl.	an. Please indicate,
by a check mark in the box, that the documents are attached. Siting Criteria Compliance Demonstrations - based upon the appropriate requirements of Proof of Surface Owner Notice - based upon the appropriate requirements of Construction/Design Plan of Burnal Trench (if applicable) based upon the appropriate of a drying p Protocols and Procedures - based upon the appropriate requirements of 19.15 Confirmation Sampling Plan (if applicable) - based upon the appropriate requirements of Waste Material Sampling Plan - based upon the appropriate requirements of Disposal Facility Name and Permit Number (for liquids, drilling fluids and documents of Soil Cover Design - based upon the appropriate requirements of Subsection Re-vegetation Plan - based upon the appropriate requirements of Subsection Site Reclamation Plan - based upon the appropriate requirements of Subsection	uirements of 19.15.17.10 NMAC Subsection F of 19.15.17 13 NMAC oppropriate requirements of 19.15.17.11 NMAC odd) - based upon the appropriate requirements of 19.5.17.13 NMAC uirements of Subsection F of 19.15.17.13 NMAC Subsection F of 19.15.17.13 NMAC litil cuttings or in case on-site closure standards cannot of 19.15.17.13 NMAC I of 19.15.17.13 NMAC	15.17 11 NMAC

Operator Application Certification:	
I hereby certify that the information submitted with this application is true, accura	•
Name (Print) JESSE D. EVAWS	Title CEO + PRESIDENT
Signature: Jul Worm	Date: July 31, 2009
e-mail address Jevans 232000@ yahoo. com	Telephone: 575-759-3224
OCD Approval: Permit Application (including closure plan) Closure Pl	
	Approval Date: 8/4/09
Title: Enviro/spec	OCD Permit Number:
Closure Report (required within 60 days of closure completion): Subsection Instructions: Operators are required to obtain an approved closure plan prior to The closure report is required to be submitted to the division within 60 days of the section of the form until an approved closure plan has been obtained and the closure plan plan plan plan plan plan plan plan	o implementing any closure activities and submitting the closure report. The completion of the closure activities. Please do not complete this
22. Closure Method: Waste Excavation and Removal On-Site Closure Method Alterna If different from approved plan, please explain	tive Closure Method Waste Removal (Closed-loop systems only)
Closure Report Regarding Waste Removal Closure For Closed-loop Systems Instructions: Please indentify the facility or facilities for where the liquids, drill two facilities were utilized.	ing fluids and drill cuttings were disposed. Use attachment if more than
Disposal Facility Name.	Disposal Facility Permit Number:
Disposal Facility Name:	Disposal Facility Permit Number.
Were the closed-loop system operations and associated activities performed on or Yes (If yes, please demonstrate compliance to the items below) No	in areas that will not be used for future service and operations?
Required for impacted areas which will not be used for future service and operation Site Reclamation (Photo Documentation) Soil Backfilling and Cover Installation Re-vegetation Application Rates and Seeding Technique	ons:
Closure Report Attachment Checklist: Instructions: Each of the following ite mark in the box, that the documents are attached. Proof of Closure Notice (surface owner and division) Proof of Deed Notice (required for on-site closure) Plot Plan (for on-site closures and temporary pits) Confirmation Sampling Analytical Results (if applicable) Waste Material Sampling Analytical Results (required for on-site closure) Disposal Facility Name and Permit Number Soil Backfilling and Cover Installation Re-vegetation Application Rates and Seeding Technique Site Reclamation (Photo Documentation) On-site Closure Location: Latitude Longitum	ande NAD: 1927 1983
25. Operator Closure Certification:	
I hereby certify that the information and attachments submitted with this closure rebelief. I also certify that the closure complies with all applicable closure requirem	
Name (Print)	Title.
Signature:	Date:
e-mail address:	Telephone:

Hydro-Geological report for JAECO 28-3 No. 3

Regional Hydro-Geological Report:

The San Jose Formation of Eocene age occurs in New Mexico and Colorado, and its outcrop forms the land surface over much of the eastern half of the central basin. It overlies the Nacimiento Formation in the area generally south of the Colorado-New Mexico State line and overlies the Animas Formation in the area generally north of the State line. The San Jose Formation was deposited in various fluvial-type environments. In general, the unit consists of an interbedded sequence of sandstone, siltstone, and variegated shale. Thickness of the San Jose Formation generally increases from west to east (200 feet in the west and south to almost 2,700 feet in the center of the structural basin). Ground water is associated with alluvial and fluvial sandstone aquifers. Thus, the occurrence of ground water is mainly controlled by the distribution of sandstone in the formation. The distribution of such sandstone is the result of original depositional extent plus any post-depositional modifications, namely erosion and structural deformation. Transmissivity data for San Jose Formation are minimal. Values of 40 and 120 feet squared per day were determined from two aquifer tests (Stone et al, 1983, table 5). The reported or measured discharge from 46 water wells completed in San Jose Formation ranges from 0.15 to 61 gallons per minute and the median is 5 gallons per minute. Most of the wells provide water for livestock and domestic use.


The San Jose Formation is a very suitable unit for recharge from precipitation because soils that form on the unit are sandy and highly permeable and therefore readily adsorb precipitation. However, low annual precipitation, relatively high transpiration and evaporation rates, and deep dissection of the San Jose Formation by the San Juan River and its tributaries all tend to reduce the effective recharge to the unit.

Reference:

Stone et al., 1983, Hydrogeology and Water Resources of the San Juan Basin, New Mexico: Socorro, New Mexico Bureau of Mines and Mineral Resources Hydrologic Report 6, 70 p.

Depth to Groundwater: Depth to groundwater is estimated at 115+ feet bgs. There are no iWaters wells with recorded groundwater depth within a one-mile radius of the pit. However, reported cathodic data associated with Williams' Indian I #3A (elevation 6955', approximately 9380' S 48 deg W from the pit) shows a depth to moisture of 20 feet. The JAECO 28-3 No. 3 well is at an elevation of 7120', adjusting for the differences in surface elevations puts depth to groundwater ~ 185 feet (see Topographic Map).



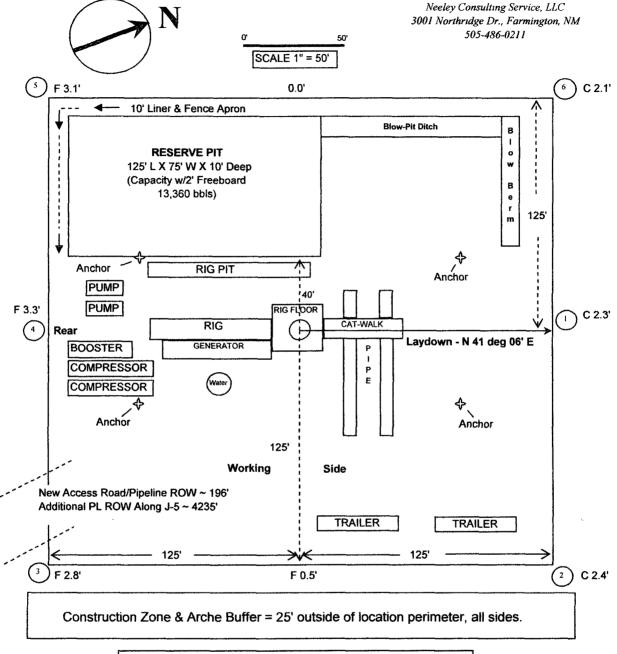

JAECO

Wellsite Layout Plat with Cut & Fills JAECO 28-3 No. 3

1660' FSL & 660' FWL Sec 25, T28N, R3W, NMPM Rio Arriba Co., New Mexico Elevation: 7120' UGL 1625 N. French Dr., Hebbs, N.M. 68240

DISTRECT II

1000 Rio Brozos Rd., Aztec, N.M. 87410

1917 G.L.O.

N 89-44-34 E

5274.42' (M)

DISTRICT IV

State of New Mexico Energy, Minerals & Natural Resources Department

OIL CONSERVATION DIVISION 1220 South St. Francis Dr. Santa Fe. NM 87505

Revised October 12, 2 Submit to Appropriate District Of

State Lease - 4 Co

Fee Lease - 3 Co

☐ AMENDED REPC

1220 South St. Francis Dr., Sonto Fe, NM 87505 WELL LOCATION AND ACREAGE DEDICATION PLAT Pool Code API Number BLANCO - MESA VERDE n-039-*30*010 72319 Well Humber ⁵Property Name Property Cods *3*6388 3 JAECO 28-3 Operator Name Devotion OGRID No. JICARILLA APACHE ENERGY CORP. 7120 11859 Surface Location North/South line East/West line UL or lot no. Lot idn Feet from the Feet from the Section Township Range County RIO ARRI SOUTH 3-W 1660 WEST 660 28-N 25 "Bottom Hole Location If Different From Surface North/South Ilno Feet from the East/West Ima Lot Idn Feet from the UL or lot no. Section Township Range County Dedicated Acres ¹⁰ Consolidation Code Official No. doing or the S/320 Acres NO ALLOWABLE WILL BE ASSIGNED TO THIS COMPLETION UNTIL ALL INTERESTS HAVE BEEN CONSOLIDATE OR A NON-STANDARD UNIT HAS BEEN APPROVED BY THE DIVISION 18 SECTION COR. OPERATOR CERTIFICATION FD 2 1/2" BC I hereby certify that the information contained her is true and complete to the best of my knowledge 162617282930 belief, end that this argentzation either eases a un interest or unleased majoral interest in the land including the proposed bottom hale location or he right to 612 this well at this location pursuant to contract with an owner of cuch a mineral or world RECEIVED interest, or to a voluntary pooling agreement or a compulsory cooling order heretalore entered by the MR 2007 OIL CONS. DIV. DIST. 3 5282.22 real of the second فيعا SURVEYOR CERTIFICATION 0-05-09 hereby certify that the well location shown on this s see plotted from field notes of actual surveys made by er under my supervision, and that the same is true o correct to the best of my belief. z APRIL 25, 2006 660 LAT: 36,60804 N. (NAD 83) LONG: 107,10885 W. (NAD 83) 660 'Anorthe SECTION COR FD 2 1/2 B SECTION COR.

FD 2 1/2 BC

1917 G.L.O.


Certificata Number


Jicarilla Apache Energy Corporation Pit Design and Construction Plan


In accordance with Rule 19.15.17 the following information describes the design and construction of temporary pits on Jicarilla Apache Energy Corporation (JAECO) locations. This is JAECO's standard procedure for all temporary pits. A separate plan will be submitted for any temporary pit which does not conform to this plan.

General Plan:

- 1. JAECO will design and construct a properly sized and approved temporary pit which wilt contain liquids and solids and should prevent contamination of fresh water and protect public health and environment.
- 2. Prior to constructing the pit, topsoil will be stockpiled in the construction zone for later use in restoration.
- 3. JAECO will sign the well location in compliance with 19.15.3.103 NMAC.
- 4. JAECO shall construct all new fences around the temporary pit utilizing 48" steel mesh field-fence (hogwire) on the bottom with a single strand of barbed wire on top. T-posts shall be installed every 12 feet and corners shall be anchored utilizing a secondary T-post. Temporary pits will be fenced at all times excluding drilling or workover operations, when the front side of the fence will be temporarily removed for operational purposes.
- 5. JAECO shall construct the temporary pit so that the foundation and interior slopes are firm and free of rocks, debris, sharp edges or irregularities to prevent liner failure.
- 6. JAECO shall construct the pit so that the slopes are no steeper than two horizontal feet to one vertical foot.
- 7. Pit walls will be walked down by a crawler type tractor following construction.
- 8. All temporary pits will be lined with a 20-mil, string reinforced, LLDPE liner, complying with EPA SW-846 method 9090A requirements.
- 9. Geotextile will be installed beneath the liner when rocks, debris, sharp edges or irregularities cannot be avoided.
- 10. All liners will be anchored in the bottom of a compacted earth-filled trench at least 18 inches deep.
- 11. JAECO will minimize liner seams and orient them up and down, not across a slope. Factory seams will be used whenever possible. JAECO will ensure all field seams are welded by qualified personnel. Field seams will be overlapped four to six inches and will be oriented parallel to the line of maximum slope. JAECO will minimize the number of field seams in corners and irregularly shaped areas.
- 12. The liner shall be protected from any fluid force or mechanical damage through the use of mud pit slides, or a manifold system.
- 13. The pit shall be protected from run-off by constructing and maintaining diversion ditches around the location or around the perimeter of the pit in some cases.
- 14. The volume of the pit shall not exceed 10 acre-feet, including freeboard.
- 15. Temporary blow pits will be constructed to allow gravity flow to discharge into lined drill pit.
- 16. The lower half of the blow pit (nearest lined pit) will be lined with a 20-mil, string reinforced, LLDPE liner. The upper half of the blow pit will remain unlined as allowed in Rule 19.15.17.11 F.11.
- 17. JAECO will not allow freestanding liquids to remain on the unlined portion of a temporary blow pit.

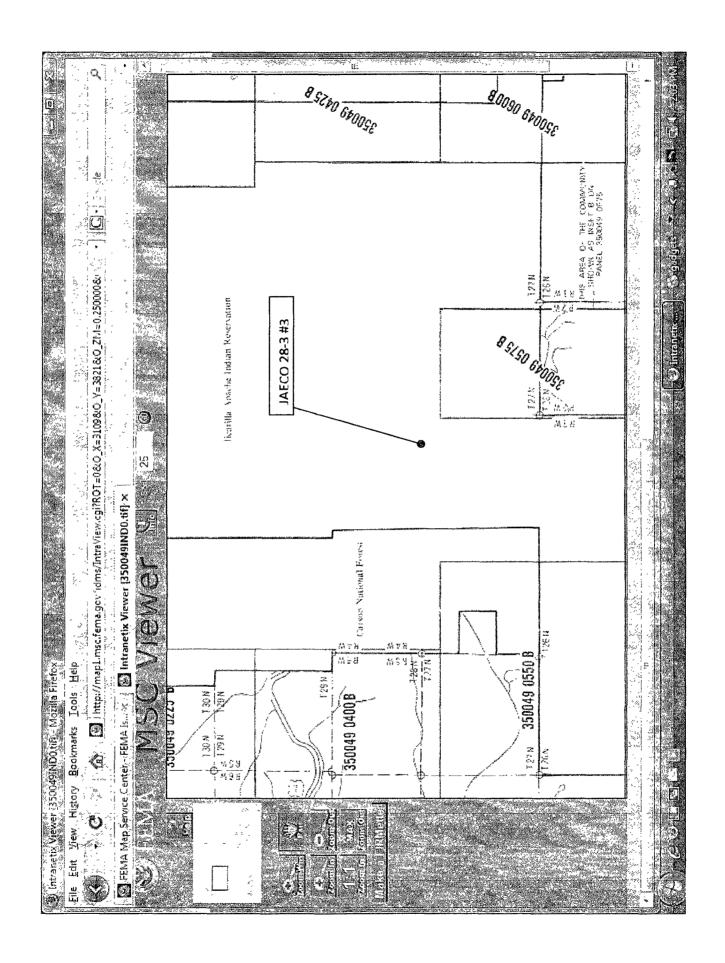

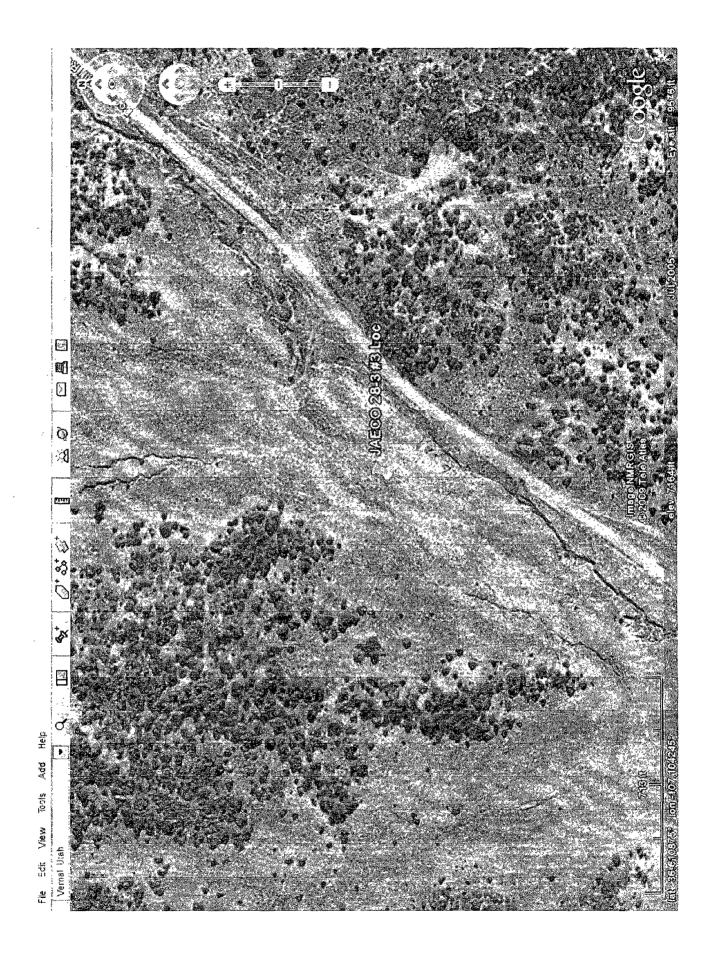

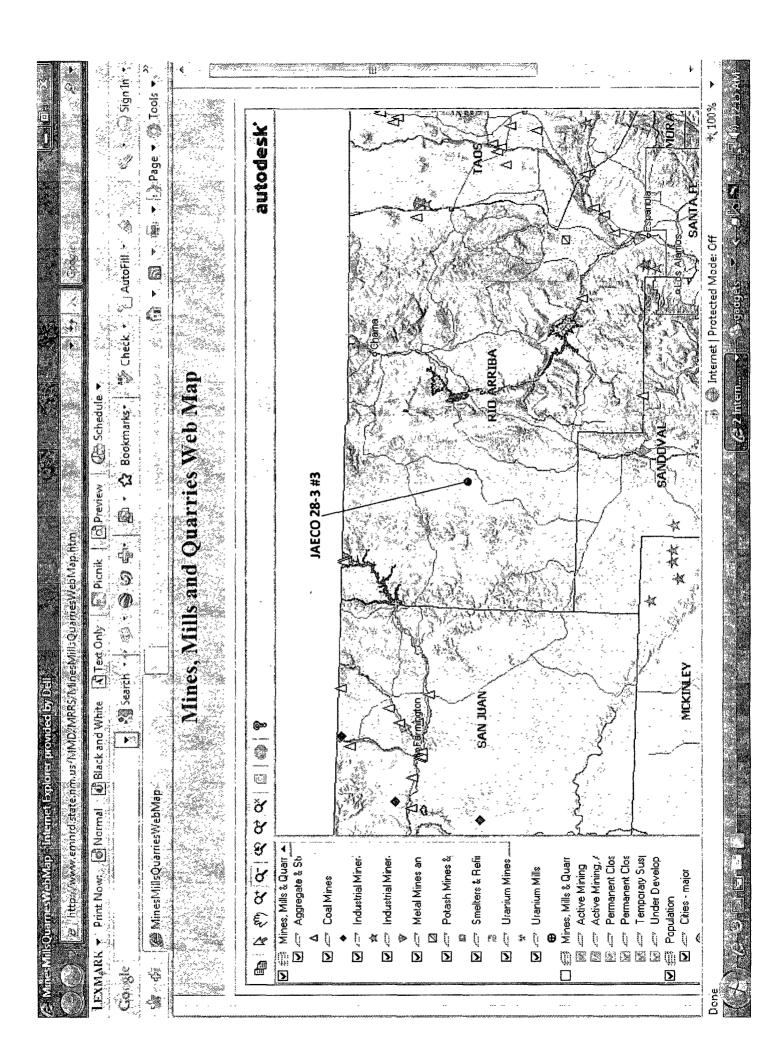

Jicarilla Apache Energy Corp (JAECO)

Temporary Pit Closure Plan

In accordance with Rule 19.15.17.12 NMAC the following information describes the closure requirements of temporary pits on Jicarilla Apache Energy Corp locations. This is JAECO's standard procedure for all temporary pits. A separate plan will be submitted for any temporary pit which does not conform to this plan.

All closure activities will include proper documentation and be available for review upon request and will be submitted to OCD within 60 days of closure of pit closure. Closure report will be filed on C-144 and incorporate the following:

- Details on Capping and Covering, where applicable.
- Plot Plan (Pit Diagram)
- Inspection Reports
- Sampling Results
- C-105

General Plan:

- 1. All free standing liquids will be removed at the start of the pit closure process from the pit and disposed of in a division-approved facility or recycle, reuse or reclaim the liquids in a manner that the appropriate division district office approves. The disposal facilities which JAECO plans to use will be TNT Environmental (Permit #NM-01-008) or Basin Disposal (Permit #NM-01-005).
- 2. The preferred method of closure for all temporary pits will be in-place burial, assuming that all the criteria listed in sub-section (B) of 19.15.17.13 are met.
- The surface owner shall be notified of JAECO's closing of the temporary pit prior to closure as per BLM MOU.
- 4. Within 6 months of the Rig Off status occurring JAECO will ensure that temporary pits are closed, re-contoured, and reseeded.
- 5. Notice of Closure will be given prior to closure to the Aztec Division office between 72 hours and one week via email, or verbally. The notification of closure will include the following: Operator's name, Location: by Unit Letter, Section, Township, and Range. Well name and API number.
- 6. Liner of temporary pit shall be removed above the "mud level". Removal of liner will consist of manually or mechanically cutting liner at mud level and removing all remaining liner that is above mud level. Care will be taken to remove "All" of the liner i.e., edges of liner entrenched or buried. All excessive liner will be disposed of at a permitted Landfill.
- 7. Pit contents shall be mixed with non-waste containing, earthen material in order to achieve the stabilization process. The stabilization process will be accomplished using a combination of natural drying and mechanically mixing. Pit contents will be mixed with non-waste, earthen material to a consistency that will support the pit's final cover. The mixing ratio shall not exceed 3 parts clean soil to 1 part pit contents.
- 8. A five point composite sample will be taken of the pit using sampling tools and all samples tested per Subsection B of 19.15.17.13(B)(1)(b). JAECO shall notify the division of the results on form C-141. If standard testing fails under the specific depth to groundwater permitted criteria, all contents will be handled per Subparagraph (a) of Paragraph (1) of Subsection B of 19.15.17.13 Dig and haul. After doing such, confirmation sampling will be conducted to ensure a release has not occurred.
- 9. Upon completion of stabilization and testing standards being passed, the pit area will be backfilled with compacted, non-waste containing, earthen material. A minimum of four feet of cover shall be achieved and the cover shall include one foot of suitable material to establish vegetation at the site, or the background thickness of topsoil, whichever is greater.
- 10. During the stabilization process, if the liner is ripped by equipment the Aztec OCD office will be notified within 48 hours and the liner will be repaired if possible. If the liner can not be repaired then all contents will be excavated and removed.

- 11. Dig and Haul Material will be transported to a division-approved facility. The disposal facilities which JAECO plans to use will be TNT Environmental (Permit #NM-01-008) or Envirotech (Permit #NM-01-011).
- 12. Re-contouring of location will match fit, shape, line, form and texture of the surrounding. Reshaping will include drainage control, prevent ponds, and prevent erosion. Natural drainages will be unimpeded and water bars and/or silt traps will be place in areas where needed to prevent erosion on a large scale. Final re-contour shall have a uniform appearance with smooth surface, fitting the natural landscape.
- 13. Notification will be sent to OCD when the reclaimed area is seeded.
- 14. JAECO shall seed the disturbed areas the first growing season after the pit is closed. Seeding will be accomplished via drilling on the contour whenever practical or by other division-approved methods. APD stipulated seed mixtures will be used on Jicarilla Apache Tribal Lands. Vegetative cover will equal 70% of the native perennial vegetative cover; that said re-vegetation shall be agreed to, completed and accepted by the SMA.
- 15. The temporary pit will be located with a steel marker, no less than four inches in diameter, cemented in a hole three feet deep in the center of the onsite burial upon the abandonment of all the wells on the pad. The marker will be flush with the ground to allow access of the active well pad and for safety concerns. The marker will include a threaded collar to be used for future abandonment. The top of the marker will contain steel 12" square plate that indicates the onsite burial of the temporary pit. The plate will be removable and a four foot tall riser will be threaded into the top of the collar marker and welded around the base with the operator's information at the time of all wells on the pad are abandoned. The operator's information will include the following: Operator Name, Lease Name, Well Name and number, Unit Number, Section, Township, Range and an indicator that the marker is a reserve pit burial location.

Siting Criteria Compliance Demonstration & Hydro Geologic Analysis


The JAECO 28-3 #3 is not located in an unstable area. The location is not over a mine and is not on the side of a hill as indicated on the Mines, Mills and Quarries Map and Topographic Map. The location of the excavated pit material will not be located within 300' of any continuously flowing watercourse or 200' from any other watercourse as indicated on the Topographic Map. The location is not within a 100-year floodplain area as indicated on the FEMA Map. All available evidence considered, ground water depth is greater than 115'. There are no i WATERS data points located in T28N, R3W as indicated on the TOPO Map. The hydro geologic analysis indicates the groundwater depth and the San Jose formation will create a stable area for this new location.

Jicarilla Apache Energy Corp (JAECO) Temporary Pit Maintenance and Operating Plan

In accordance with Rule 19.15.17 the following information describes the operation and maintenance of temporary pits on JAECO locations. This is JAECO's standard procedure for all temporary pits. A separate plan will be submitted for any temporary pit which does not conform to this plan.

General Plan:

- JAECO will operate and maintain a temporary pit to contain liquids and solids and maintain the integrity of the liner and liner system to prevent contamination of fresh water and protect public health and environment.
- JAECO will conserve drilling fluids by transferring liquids to pits ahead of the rigs whenever possible.
 All other drilling fluids will be disposed at TNT Environmental, permit # NM-0008-001 or Basin Disposal Inc., permit # NM-01-005.
- 3. JAECO will not discharge or store any hazardous waste in any temporary pit.
- 4. If any pit liner's integrity is compromised, or if any penetration of the liner occurs above the liquid's surface, then JECO shall notify the Aztec Division office by phone or email within 48 hours of the discovery and repair the damage or replace the liner.
- 5. If a leak develops below the liquid's level, JAECO shall remove all liquids above the damaged liner within 48 hours and repair the damage or replace the liner. JAECO shall notify the Aztec Division office by phone or email within 48 hours of the discovery for leaks less than 25 barrels. JAECO shall notify the Aztec Division office as required pursuant to Subsection B of 19.15.3.116 NMAC shall be reported within twenty-four (24) hours of discovery of leaks greater than 25 barrels. In addition, immediate verbal notification pursuant to Subsection B, Paragraph (1), and Subparagraph (d) of 19.15.3.116 NMAC shall be reported to the division's Environmental Bureau Chief.
- 6. The liner shall be protected from any fluid force or mechanical damage through the use of mud pit slides, or a manifold system.
- 7. The pit shall be protected from run-off by constructing and maintaining diversion ditches around the location or around the perimeter of the pit in some cases.
- 8. JAECO shall immediately remove any visible layer of oil from the surface of the temporary pit after cessation of a drilling or workover operation. Oil absorbent booms will be utilized to contain and remove oil from the pit's surface. An oil absorbent boom will stored on-site until closure of pit.
- 9. Only fluids generated during the drilling or workover process may be discharged into a temporary pit.
- 10. JAECO will maintain the temporary pit free of miscellaneous solid waste or debris.
- 11. During drilling operations, JAECO will inspect the temporary pit at least once daily to ensure compliance with this plan. Inspections will be logged in the Drilling reports. JAECO will file this log with the Aztec Division office upon closure of the pit.
- 12. After drilling operations, JAECO will inspect the temporary pit weekly so long as liquids remain in the temporary pit. A log of the inspections will be stored at JAECO's office electronically and will be filed with the Aztec Division office upon closure of the pit.
- 13. JAECO shall maintain at least two feet of freeboard for a temporary pit.
- 14. JAECO shall remove all free liquids from a temporary pit within 30 days from the date the operator releases the drilling rig.

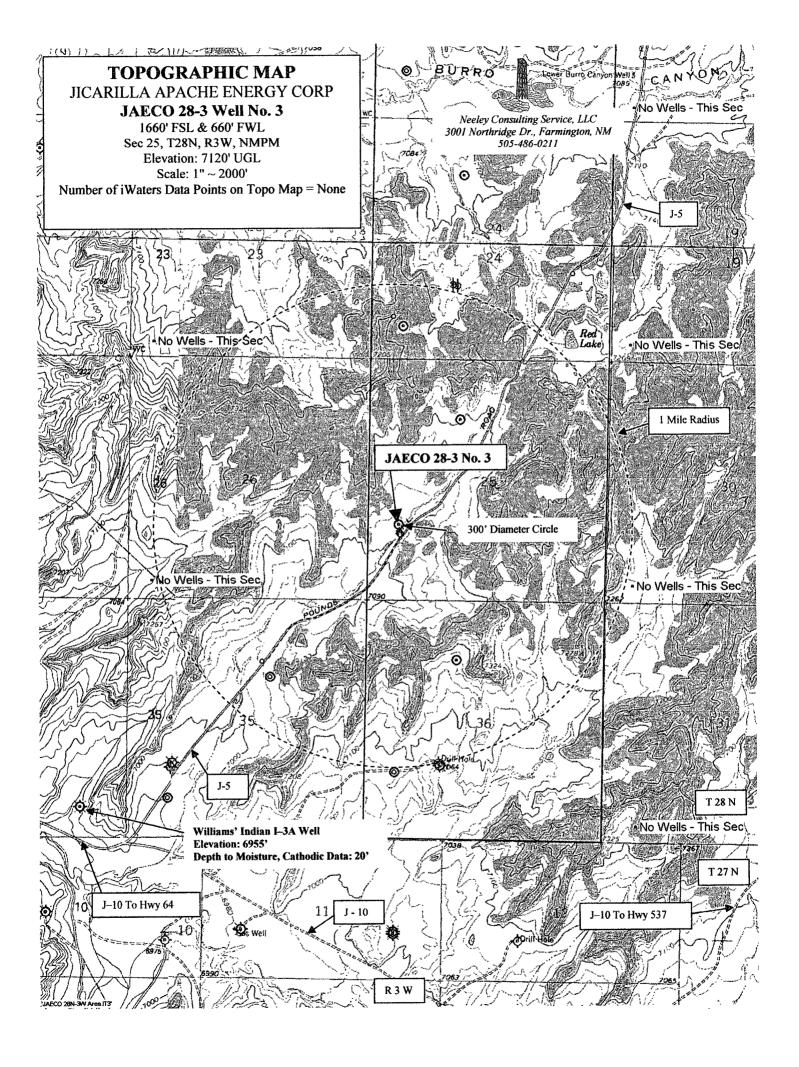

UNITED STATES DEPARTMENT OF THE INTERIOR **BUREAU OF LAND MANAGEMENT**

APPLICATION FOR PERMIT TO DRILL OR REENTER

FORM APPROVED OMB No.: 1004-0136 Expires January 31, 2004

5. Lease Serial No.

MD	Δ 7	701.	-04-	001

6. If Indian, Allottee or Tribe Name

JICARILLA	APACHE	NATION

	40.0 111 00 00 11		JICARILLA APACH	E NATION
la. Type of Work: DRILL REENTE	COUNTILL CO (1) 1	3 U	7. If Unit or CA Agreeme	nt, Name and No.
	RECEIVED		8. Lease Name and Well N	io.
1b. Type of Well: Oil Well Gas Well Other Of Single Zone Multiple Zone			JAECO 28-3 No. 3	
2. Name of Operator JICARILLA APACHE ENERGY CORP			9. API Well No. 30-039-	30010
3a. Address	3b. Phone No. (include area code)	······································	10. Field and Pool, or Expl	oratory
P.O. Box 710 Dulce, New Mexico 87528	505-759-3224		BLANCO MESAVERDE	
4. Location of Well Report location clearly and in accordance with	any State requirements. *)		11. Sec., T., R., M., or Blk.	
At surface 1660' FSL & 660' FWL	, , , , , , , , , , , , , , , , , , ,			
At proposed prod. zone As ABOVE			25, T28N, R3W,	NMPM
14. Distance in miles and direction from nearest town or post office*			12. County or Parish	13. State
29.5 MILES SSW OF DULCE, NM			RIO ARRIBA	NM
15. Distance from proposed* location to nearest property or lease line, ft. (Also to nearest drig. unit line, if any) 660'	16. No. of Acres in lease 8863.50		g Unit dedicated to this well TH HALF - 320 ACRES	.
18. Distance from proposed location* to nearest well, drilling, completed, applied for, on this lease, ft. 32.36'	19. Proposed Depth 20. BLM/BIA Bond No. on file 6217 ON FILE			
21. Elevations (Show whether DF, KDB, RT, GL, etc.)	22. Approximate date work will		23. Estimated duration	
7120 UGL	OCTOBER 1, 2006		15 Days	
	24. Attachments			
The following, completed in accordance with the requirements of Onsho	ore Oil and Gas Order No.1, shall be a	ttached to this	s form:	
 Well plat certified by a registered surveyor. A Drilling Plan. A Surface Use Plan (if the location is on National Forest System SUPO shall be filed with the appropriate Forest Service Office). 	Item 20 above). 5. Operator certification	cation. specific info	s unless covered by an exist	,
25. Signature Phanks Herley	Name (Printed/Typed) CHARLES NEELEY		Dat	7/26/06
Title				
CONTRACT DRILLING ENGINEER				
Approved by Gionature)	Name (Printed/Tuned)		Date	

Office Application approval does not warrant or certify that the applicant holds legal or equitable title to those rights in the subject lease which would entitle the applicant to conduct

operations thereon. Conditions of approval, if any, are attached.

Title 18 U.S.C. Section 1001 and Title 43 & S.C. Section 1212, make it a crime for any person knowingly and willfully to make to any department or agency of the Unite States any false, fictitious or fraudulent statements or representations as to any matter within its jurisdiction.

*(Instructions on reverse)

Title

NOTIFY AZTEC OCD 24 HRS. PRIOR TO CASING & CEMENT

NWOCD



