District L 1625 N. French Dr., Hobbs, NM 88240 District IL : 1301 W. Grand Avenue, Artesia, NM 88210 District III 1000 Rio Brazos Road, Aztec, NM 87410 District IV 1220 S. St. Francis Dr., Santa Fe, NM 87505

State of New Mexico **Energy Minerals and Natural Resources** Department Oil Conservation Division 1220 South St. Francis Dr. Santa Fe, NM 87505

For temporary pits, closed-loop systems, and below-grade tanks, submit to the appropriate NMOCD District Office.

For permanent pits and exceptions submit to the Santa Fe Environmental Bureau office and provide a copy to the appropriate NMOCD District Office.

4	3	8		2
---	---	---	--	---

Pit, Closed-Loop System, Below-Grade Tank, or

Proposed Alternative Method Permit or Closure Plan Application							
Type of action: X Permit of a pit, closed-loop system, below-grade tank, or proposed alternative method Closure of a pit, closed-loop system, below-grade tank, or proposed alternative method Modification to an existing permit Closure plan only submitted for an existing permitted or non-permitted pit, closed-loop system, below-grade tank, or proposed alternative method							
Instructions: Please submit one application (Form C-144) per individual pit, closed-loop system, below-grade tank or alternative request							
Please be advised that approval of this request does not relieve the operator of liability should operations result in pollution of surface water, ground water or the environment. Nor does approval relieve the operator of its responsibility to comply with any other applicable governmental authority's rules, regulations or ordinances.							
Operator: Energen Resources Corporation OGRID#: 162928							
Address: 2010 Afton Place, Farmington, NM 87401							
Facility or well name: San Juan 32-5 Unit #101S							
API Number: 30-039-27263 OCD Permit Number:							
U/L or Qtr/Qtr P Section 23 Township 32N Range 06W County: Rio Arriba							
Center of Proposed Design: Latitude							
Surface Owner: X Federal State Private Tribal Trust or Indian Allotment							
Surface Owner. Est cacamin State in Trade of Industrial Anotherit							
Pit: Subsection F or G of 19.15.17.11 NMAC Temporary: Drilling Workover Permanent Emergency Cavitation P&A Lined Unlined Liner type: Thickness 20 mil LLDPE HDPE PVC Other String-Reinforced Liner Seams: Welded Factory Other Volume: 1500 bbl Dimensions: 155 x W 85 x D 10 Closed-loop System: Subsection H of 19.15.17.11 NMAC Type of Operation: P&A Drilling a new well Workover or Drilling (Applies to activities which require prior approval of a permit or notice of intent) Drying Pad Above Ground Steel Tanks Haul-off Bins Other Lined Unlined Liner type: Thickness mil LLDPE HDPE PVC Other Dread-loop System: Welded Factory Other Thickness RECENTED RECENTED Recent Rec							
4. COVIEZO09 22							
Below-grade tank: Subsection I of 19.15.17.11 NMAC Volume:							
Volume: bbl Type of fluid:							
Tank Construction material:							
Secondary containment with leak detection Usible sidewalls, liner, 6-inch lift and automatic overflow shut-off							
Visible sidewalls and liner Visible sidewalls only Uther							
Liner type: Thickness mil _ LLDPE _ HDPE _ PVC _ Other							

Alternative Method:

Submittal of an exception request is required. Exceptions must be submitted to the Santa Fe Environmental Bureau office for consideration of approval.

6. Fencing: Subsection D of 19.15.17.11 NMAC (Applies to permanent pits, temporary pits, and below-grade tanks) Chain link, six feet in height, two strands of barbed wire at top (Required if located within 1000 feet of a permanent residence, school institution or church)	ool, hospital,				
X Four foot height, four strands of barbed wire evenly spaced between one and four feet Alternate. Please specify					
Allemate. Flease speerly					
Netting: Subsection E of 19.15.17.11 NMAC (Applies to permanent pits and permanent open top tanks)					
Screen Netting Other					
Monthly inspections (If netting or screening is not physically feasible)					
Signs: Subsection C of 19.15.17.11 NMAC					
12"x 24", 2" lettering, providing Operator's name, site location, and emergency telephone numbers	•				
☑ Signed in compliance with 19.15.3.103 NMAC					
Administrative Approvals and Exceptions: Justifications and/or demonstrations of equivalency are required. Please refer to 19.15.17 NMAC for guidance. Administrative approval(s): Requests must be submitted to the appropriate division district or the Santa Fe Environmental Bu consideration of approval. Exception(s): Requests must be submitted to the Santa Fe Environmental Bureau office for consideration of approval.	reau office for				
10.					
Siting Criteria (regarding permitting): 19.15.17.10 NMAC Instructions: The applicant must demonstrate compliance for each siting criteria below in the application. Recommendations of acceptable source material are provided below. Requests regarding changes to certain siting criteria may require administrative approval from the appropriate district office or may be considered an exception which must be submitted to the Santa Fe Environmental Bureau office for consideration of approval. Applicant must attach justification for request. Please refer to 19.15.17.10 NMAC for guidance. Siting criteria does not apply to drying pads or above-grade tanks associated with a closed-loop system.					
Ground water is less than 50 feet below the bottom of the temporary pit, permanent pit, or below-grade tank. - NM Office of the State Engineer - iWATERS database search; USGS; Data obtained from nearby wells	☐ Yes X No				
Within 300 feet of a continuously flowing watercourse, or 200 feet of any other significant watercourse or lakebed, sinkhole, or playa lake (measured from the ordinary high-water mark). - Topographic map; Visual inspection (certification) of the proposed site	☐ Yes X No				
Within 300 feet from a permanent residence, school, hospital, institution, or church in existence at the time of initial application. (Applies to temporary, emergency, or cavitation pits and below-grade tanks) - Visual inspection (certification) of the proposed site; Aerial photo; Satellite image	Yes X No				
Within 1000 feet from a permanent residence, school, hospital, institution, or church in existence at the time of initial application. (Applies to permanent pits) - Visual inspection (certification) of the proposed site; Aerial photo; Satellite image	Yes X No				
Within 500 horizontal feet of a private, domestic fresh water well or spring that less than five households use for domestic or stock watering purposes, or within 1000 horizontal feet of any other fresh water well or spring, in existence at the time of initial application. - NM Office of the State Engineer - iWATERS database search; Visual inspection (certification) of the proposed site	Yes X No				
Within incorporated municipal boundaries or within a defined municipal fresh water well field covered under a municipal ordinance adopted pursuant to NMSA 1978, Section 3-27-3, as amended. - Written confirmation or verification from the municipality; Written approval obtained from the municipality	Yes X No				
Within 500 feet of a wetland. - US Fish and Wildlife Wetland Identification map; Topographic map; Visual inspection (certification) of the proposed site	· Yes X No				
Within the area overlying a subsurface mine. - Written confirmation or verification or map from the NM EMNRD-Mining and Mineral Division	☐ Yes 🛛 No				
Within an unstable area. - Engineering measures incorporated into the design; NM Bureau of Geology & Mineral Resources; USGS; NM Geological Society; Topographic map	Yes X No				
Within a 100-year floodplain.	☐ Yes X No				

Temporary Pits, Emergency Pits, and Below-grade Tanks Permit Application Attachment Checklist: Subsection B of 19.15.17.9 NMAC Instructions: Each of the following items must be attached to the application. Please indicate, by a check mark in the box, that the documents are attached. Hydrogeologic Report (Below-grade Tanks) - based upon the requirements of Paragraph (4) of Subsection B of 19.15.17.9 NMAC Hydrogeologic Data (Temporary and Emergency Pits) - based upon the requirements of Paragraph (2) of Subsection B of 19.15.17.9 NMAC Siting Criteria Compliance Demonstrations - based upon the appropriate requirements of 19.15.17.10 NMAC Design Plan - based upon the appropriate requirements of 19.15.17.11 NMAC Closure Plan (Please complete Boxes 14 through 18, if applicable) - based upon the appropriate requirements of Subsection C of 19.15.17.9 NMAC and 19.15.17.13 NMAC Previously Approved Design (attach copy of design) API Number: or Permit Number:
12.
Closed-loop Systems Permit Application Attachment Checklist: Subsection B of 19.15.17.9 NMAC Instructions: Each of the following items must be attached to the application. Please indicate, by a check mark in the box, that the documents are attached.
Geologic and Hydrogeologic Data (only for on-site closure) - based upon the requirements of Paragraph (3) of Subsection B of 19.15.17.9 Siting Criteria Compliance Demonstrations (only for on-site closure) - based upon the appropriate requirements of 19.15.17.10 NMAC Design Plan - based upon the appropriate requirements of 19.15.17.11 NMAC Operating and Maintenance Plan - based upon the appropriate requirements of 19.15.17.12 NMAC Closure Plan (Please complete Boxes 14 through 18, if applicable) - based upon the appropriate requirements of Subsection C of 19.15.17.9 NMAC and 19.15.17.13 NMAC
Previously Approved Design (attach copy of design) API Number:
Previously Approved Operating and Maintenance Plan API Number:
Permanent Pits Permit Application Checklist: Subsection B of 19.15.17.9 NMAC Instructions: Each of the following items must be attached to the application. Please indicate, by a check mark in the box, that the documents are attached. Hydrogeologic Report - based upon the requirements of Paragraph (1) of Subsection B of 19.15.17.9 NMAC Siting Criteria Compliance Demonstrations - based upon the appropriate requirements of 19.15.17.10 NMAC Climatological Factors Assessment Certified Engineering Design Plans - based upon the appropriate requirements of 19.15.17.11 NMAC Dike Protection and Structural Integrity Design - based upon the appropriate requirements of 19.15.17.11 NMAC Leak Detection Design - based upon the appropriate requirements of 19.15.17.11 NMAC Liner Specifications and Compatibility Assessment - based upon Quality Control/Quality Assurance Construction and Installation Plan the appropriate requirements of 19.15.17.11 NMAC Operating and Maintenance Plan - based upon the appropriate requirements of 19.15.17.12 NMAC Freeboard and Overtopping Prevention Plan - based upon the appropriate requirements of 19.15.17.11 NMAC Nuisance or Hazardous Odors, including H2S, Prevention Plan Emergency Response Plan Oil Field Waste Stream Characterization Monitoring and Inspection Plan Erosion Control Plan Closure Plan - based upon the appropriate requirements of Subsection C of 19.15.17.9 NMAC and 19.15.17.13 NMAC
Proposed Closure: 19.15.17.13 NMAC Instructions: Please complete the applicable boxes, Boxes 14 through 18, in regards to the proposed closure plan. Type: Drilling Workover Emergency Cavitation P&A Permanent Pit Below-grade Tank Closed-loop System Alternative Proposed Closure Method: Waste Excavation and Removal Waste Removal (Closed-loop systems only) On-site Closure Method (Only for temporary pits and closed-loop systems) X In-place Burial On-site Trench Burial Alternative Closure Method (Exceptions must be submitted to the Santa Fe Environmental Bureau for consideration)
Waste Excavation and Removal Closure Plan Checklist: (19.15.17.13 NMAC) Instructions: Each of the following items must be attached to the closure plan. Please indicate, by a check mark in the box, that the documents are attached. Protocols and Procedures - based upon the appropriate requirements of 19.15.17.13 NMAC Confirmation Sampling Plan (if applicable) - based upon the appropriate requirements of Subsection F of 19.15.17.13 NMAC Disposal Facility Name and Permit Number (for liquids, drilling fluids and drill cuttings) Soil Backfill and Cover Design Specifications - based upon the appropriate requirements of Subsection H of 19.15.17.13 NMAC Re-vegetation Plan - based upon the appropriate requirements of Subsection G of 19.15.17.13 NMAC

Waste Removal Closure For Closed-loop Systems That Utilize Above Grou Instructions: Please indentify the facility or facilities for the disposal of liquids facilities are required.	nd Steel Tanks or Haul-off Bins Only: (19.15.17.13.I drilling fluids and drill cuttings. Use attachment if mor	O NMAC) re than two			
Disposal Facility Name:	Disposal Facility Permit Number:				
Disposal Facility Name:	Disposal Facility Permit Number:				
Will any of the proposed closed-loop system operations and associated activitie operations? Yes (If yes, please provide the information below) No	s occur on or in areas that will not be used for future ser	vice and			
Required for impacted areas which will not be used for future service and operation Soil Backfill and Cover Design Specifications based upon the appropriate Re-vegetation Plan - based upon the appropriate requirements of Subsection Site Reclamation Plan - based upon the appropriate requirements of Subsection Plan - based upon the ap	priate requirements of Subsection H of 19.15.17.13 NM/ ction I of 19.15.17.13 NMAC	4C			
Siting Criteria (regarding on-site closure methods only: 19.15.17.10 NMAC Instructions: Each siting criteria requires a demonstration of compliance in provided below. Requests regarding changes to certain siting criteria may require considered an exception which must be submitted to the Santa Fe Environment and/or demonstrations of equivalency are required. Please refer to 19.15.17.1	the closure plan. Recommendations of acceptable sout wire administrative approval from the appropriate dist mental Bureau office for consideration of approval. J	rict office or may			
Ground water is less than 50 feet below the bottom of the buried waste - NM Office of the State Engineer - iWATERS database search; USGS;	Data obtained from nearby wells	☐ Yes X No ☐ NA			
Ground water is between 50 and 100 feet below the bottom of the buried waste NM Office of the State Engineer - iWATERS database search; USGS;	Data obtained from nearby wells	☐ Yes X No ☐ NA			
Ground water is more than 100 feet below the bottom of the buried waste. - NM Office of the State Engineer - iWATERS database search; USGS;	Data obtained from nearby wells	Yes No			
Within 300 feet of a continuously flowing watercourse, or 200 feet of any other lake (measured from the ordinary high-water mark). - Topographic map; Visual inspection (certification) of the proposed site.		Yes X No			
Within 300 feet from a permanent residence, school, hospital, institution, or chu - Visual inspection (certification) of the proposed site; Aerial photo; Sat		Yes X No			
Within 500 horizontal feet of a private, domestic fresh water well or spring that watering purposes, or within 1000 horizontal feet of any other fresh water well of NM Office of the State Engineer - iWATERS database; Visual inspect	or spring, in existence at the time of initial application.	Yes X No			
Within incorporated municipal boundaries or within a defined municipal fresh vadopted pursuant to NMSA 1978, Section 3-27-3, as amended. - Written confirmation or verification from the municipality; Written approximation		Yes X No			
Within 500 feet of a wetland US Fish and Wildlife Wetland Identification map; Topographic map; V	isual inspection (certification) of the proposed site	Yes X No			
Within the area overlying a subsurface mine Written confirmation or verification or map from the NM EMNRD-Mi	ning and Mineral Division	Yes X No			
Within an unstable area. - Engineering measures incorporated into the design; NM Bureau of Geology & Mineral Resources; USGS; NM Geological Society; Topographic map					
Within a 100-year floodplain FEMA map		Yes XNo			
On-Site Closure Plan Checklist: (19.15.17.13 NMAC) Instructions: Each or by a check mark in the box, that the documents are attached.	the following items must be attached to the closure pla	n. Please indicate,			
X Siting Criteria Compliance Demonstrations - based upon the appropriate requirements of Construction/Design Plan of Burial Trench (if applicable) based upon the a Construction/Design Plan of Temporary Pit (for in-place burial of a drying IX Protocols and Procedures - based upon the appropriate requirements of 19.1 X Confirmation Sampling Plan (if applicable) - based upon the appropriate requirements of X Disposal Facility Name and Permit Number (for liquids, drilling fluids and X Soil Cover Design - based upon the appropriate requirements of Subsection X Re-vegetation Plan - based upon the appropriate requirements of Subsection	F Subsection F of 19.15.17:13 NMAC ppropriate requirements of 19.15.17.11 NMAC pad) - based upon the appropriate requirements of 19.15 5.17.13 NMAC puirements of Subsection F of 19.15.17.13 NMAC Subsection F of 19.15.17.13 NMAC drill cuttings or in case on-site closure standards cannot H of 19.15.17.13 NMAC I of 19.15.17.13 NMAC				

Operator Application Certification: I hereby certify that the information submitted with this application is true, accurately.	rate and complete to the best of my knowledge and belief.
Name (Print): Jason Kincaid	Title: Drilling Engineer
Signature:	Date:11/17/2009
e-mail address: _jkincaid@energen.com	Telephone: 505 324-4163
OCD Approval: Permit Application (including closure plan)	
OCD Representative Signature: Brand Sell	Approval Date: 6/15/10
Title: Ensiro/spec	OCD Permit Number:
Closure Report (required within 60 days of closure completion): Subsection Instructions: Operators are required to obtain an approved closure plan prior report. The closure report is required to be submitted to the division within 60 complete this section of the form until an approved closure plan has been obtained.	to implementing any closure activities and submitting the closure days of the completion of the closure activities. Please do not
22.	
Closure Method: Waste Excavation and Removal On-Site Closure Method Alternation If different from approved plan, please explain.	ve Closure Method
Closure Report Regarding Waste Removal Closure For Closed-loop System Instructions: Please indentify the facility or facilities for where the liquids, dri than two facilities were utilized. Disposal Facility Name:	illing fluids and drill cuttings were disposed. Use attachment if more
Disposal Facility Name:	Disposal Facility Permit Number:
Were the closed-loop system operations and associated activities performed on o Yes (If yes, please demonstrate compliance to the items below) No	or in areas that will not be used for future service and operations?
Required for impacted areas which will not be used for future service and operated Site Reclamation (Photo Documentation) Soil Backfilling and Cover Installation Re-vegetation Application Rates and Seeding Technique	tions:
Closure Report Attachment Checklist: Instructions: Each of the following itemark in the box, that the documents are attached. Proof of Closure Notice (surface owner and division) Proof of Deed Notice (required for on-site closure) Plot Plan (for on-site closures and temporary pits) Confirmation Sampling Analytical Results (if applicable) Waste Material Sampling Analytical Results (required for on-site closure) Disposal Facility Name and Permit Number Soil Backfilling and Cover Installation Re-vegetation Application Rates and Seeding Technique Site Reclamation (Photo Documentation) On-site Closure Location: Latitude Longi	ems must be attached to the closure report. Please indicate, by a check
25	
Operator Closure Certification: I hereby certify that the information and attachments submitted with this closure belief. I also certify that the closure complies with all applicable closure requires	
Name (Print):	Title:
Signature:	Date:
e-mail address:	Telephone:



Temporary Pit Design Plan

The pit will be designed and constructed in the following manner:

- Top soil will be stripped, stockpiled and stored as designated on the attached well sight layout schematic. Storage will be in accordance with the requirements set forth as described in item B of the the siting requirements of 19.15.17.11 NMAC.
- 2) A sign will be posted on location in accordance with 19.15.3.103 NMAC.
- 3) A four strand barbwire fence will be constructed around the perimeter of the pit with the strands evenly spaced between one and four feet from the ground. This fence will be used to excluded livestock from inadvertently entering the pit. The side of the fence adjacent to the rig will be removed during operations. This fence if located within 1000 feet of a permanent residence, school, hospital, institution or church will be a six foot chain link fence with two strands of barbed wire at the top.
- 4) The pit will be designed to confine liquids, prevent unauthorized releases by constructing a foundation with interior slopes consisting of a firm and unyielding base that are smooth and free of rocks, debris or other sharp edges to prevent liner damage.
- 5) The slopes will be constructed with a 2:1 ratio of vertical to horizontal with a changing slope within five feet of the shale shakers trending towards horizontal.
- 6) The volume of the pit will no exceed 10 acre feet including freeboard.
- 7) The pit will be lines with a LLDPE geomembrane liner with a thickness of no less then 20mm. The liner material will be compatible with EPA SW-846 method 9090A.
- 8) Liner seams will be orientated perpendicular to the largest slope with an overlap of four to six inches.
- 9) If needed a geotextile will be place under the liner to reduce localized stressstrain that may compromise liner integrity.
- 10) The edges of the liner will be anchored in the bottom of a compacted earthfilled trench no less the 18 inches deep.
- 11) To prevent runon of surface water a berm no less then 12 inches high will be constructed around the perimeter of the pit. With drainage ditches being directed to the runoff requirements set forth in the APD Condition of Approval.



Temporary Pit Operations Plan

The pit will be operated and maintained; to contain liquids and solids, to insure liner and secondary containment integrity, to aid in the prevention of contamination of fresh water sources, in order to protect public health and the environment. To attain this goal the following steps will be followed;

- 1) The fluids in the pit remaining after rig release will be vacuumed out and transported to active drilling locations to be reused or disposed of with Agua Moss LLC in the Pretty Lady #1 (Disposal API Number # 30-048-30922) within 30 days. Residual fluids after vacuuming will be allowed to evaporate.
- 2) No hazardous waste, miscellaneous solid waste or debris will be discharged into or stored in the pit. Only fluids or cuttings used or generated in the drilling process will be placed or stored in the pit.
- 3) The division district office will be notified within 48 hrs of the discovery of compromised liner integrity. Upon the discovery of the compromised liner repairs will be enacted immediately.
- 4) The division district office will be notified within 48 hrs of the discovery of compromised liner integrity below the fluid level unless more then 25 bbls is released in which case Rule 116's 24 hr notification will apply. All liquid above the damaged liner section will be removed to a level below the damage within 48 hrs and repairs will be enacted.
- 5) Precautionary measures will be taken to insure no liner damage is caused when adding or removing fluids and solids from the pit. This will be accomplished by gradually increasing the slope of the pit from negligible underneath the shale shakers to the 2:1 ratio required by 19.15.17.11 within five feet. A perforated pipe will be installed in the corner of the pit so that a vacuum hose can be run through it to remove fluids without damaging the liner.
- 6) Perimeter berms and ditches will be constructed around the exterior of the pit to prevent surface water run-on but the rig side may be left open to allow location drainage.
- 7) An oil absorbent boom will be maintained on site to remove oil from the pit's surface if necessary. Immediately on the cessation of drilling any accumulated oil will be removed from the surface of the pit.
- 8) A minimum of two feet of freeboard will be maintained at all times. Once fluid levels have the possibility of rising above the minimum freeboard fluid will be vacuumed out of the pit.
- 9) All of the above operations will be inspected and a log will be signed and dated. During drilling operations the inspection will be daily and after rig release they will be carried out weekly as log as there is fluid in the pit.



Temporary Pit Closure Plan

The pit will be closed with in place burial. The surface owner will be notified prior to closure by certified mail and the return receipt will be included in the closure packet. The OCD will be verbally or by other means notified at least 72 hours and not more then one week prior to the pit closing. The following process will be used to close the pit:

- 1) At time of closure, all free standing fluids will be removed and reused or disposed with Agua Moss LLC in the Pretty Lady #1 (Disposal API Number # 30-048-30922) or an Energen operated permitted disposal well. The contents will be solidified to a bearing capacity sufficient to support the final cover. This will be accomplished by mixing the contents with soil at a mixing ratio no greater then 3:1 soil to contents.
- 2) The liner will be cut off at the mudline of the stabilized contents.
- 3) Sampling will be done by collecting a minimum of a five-point composite sample of the contents after stabilization. The sample will be analyzed for the following components (if the groundwater is less than 100 feet below the pit but greater than 50 feet, testing for chlorides will be done to the lower limit);


Components	Tests Method	Limit (mg/Kg)		
Benzene	EPA SW-846 8021B or 8260B	0.2		
BTEX	EPA SW-846 8021B or 8260B	50		
TPH	EPA SW-846 418.1	2500		
GRO/DRO	EPA SW-846 8015M	500		
Chlorides	EPA 300.1	500/1000		


- 4) After demonstrating that the stabilized contents are under the limits listed above, the contents will be covered with compacted non-waste containing earthen material to a minimum of three feet. If stabilized contents exceed a volume that can be covered with three feet of earth and a foot of topsoil the excess contents will be removed and sent to Envirotech (Permit NM-01-0011) or IEI Landfarm (Permit NM-01-0010B). If the stabilized contents do no meet the above stated limits the stabilized contents will all be hauled to Envirotech pursuant to excavation and removal guidelines (19.15.17.13 B1).
- 5) After the stabilized contents have been covered, the stockpiled topsoil will be replaced to a minimum depth of one foot. Topsoil cover will be graded to prevent ponding of water and erosion of the cover material. This will be accomplished within six months of rig release.
- 6) The exact location of the on-site burial will be reported to the Aztec field office on the C-105 form. A deed notice identifying the exact location of the on-site burial will be filed with the county clerk if the pit is on private surface.
- 7) The final closure report (C-144) will be filed within 60 days of closure completion and include sampling results, plot plan, details on backfilling / covering and inspections during the life of the pit.
- 8) If the pit is located on federal or tribal surface, seeding will be deferred to BLM requirements per the BLM / OCD MOU. Otherwise, the disturbed area will be seeded or planted the first growing season after closing the pit. Seed will be drilled on the contour whenever practical or by other division-



approved methods. The goal being to obtain vegetative cover that equals 70% of the native cover (un-impacted by overgrazing, fire or other intrusion damaging to native vegetation) consisting of at least three native plant species, including at least one grass but not including noxious weeds. Cover will be maintained through two successive growing seasons. During the two growing seasons that prove viability there shall be no artificial irrigation of the vegetation. Seeding or planting will continue until the required cover is reached. If conditions are not favorable to establishment of vegetation due to periods of drought or similar problems then the Aztec office of the OCD will be notified. The Aztec office of the OCD will also be notified when the disturbed ground successfully achieves re-vegetation.

9) Until the abandonment of the wells on the pad where the pit is located a steel marker no less then four inches in diameter will be cemented in a hole three feet deep in the center of the onsite burial. The top of this marker will be flush with the ground. Once all wells on the pad are abandoned a four foot tall riser will be welded on top of the marker with; operator name, lease name, well name and number, unit number, section, township and rage, and a designation that it is an onsite burial location

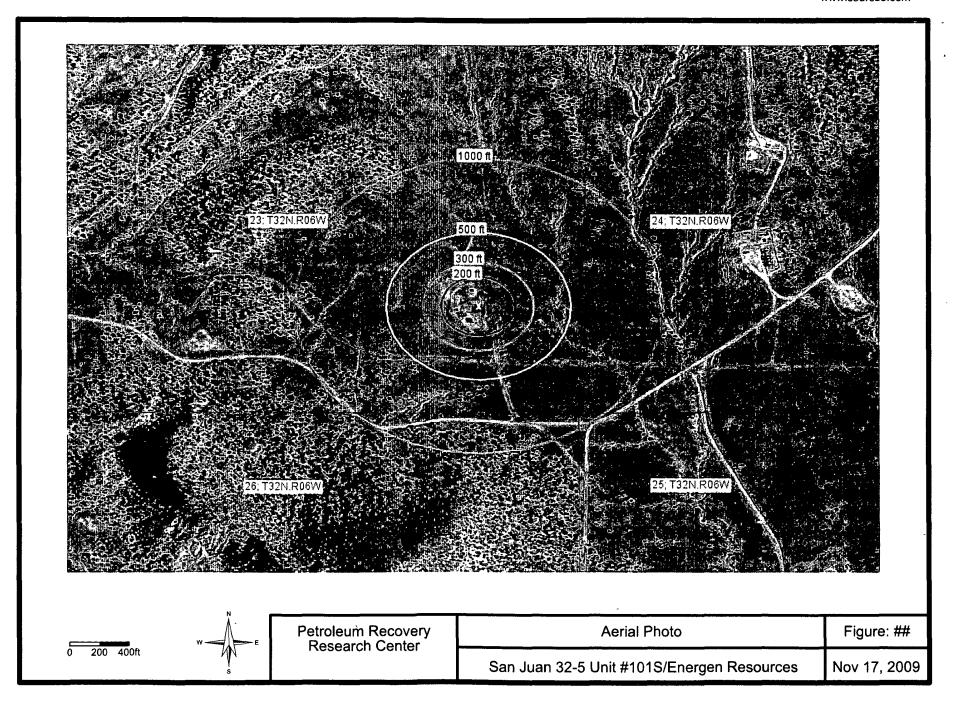

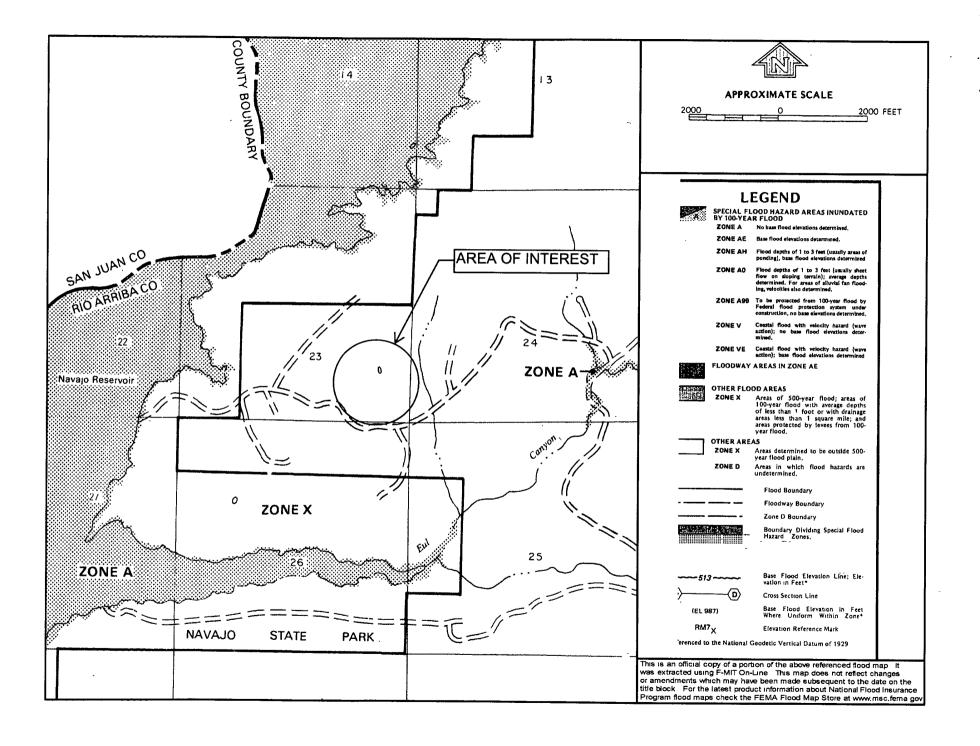

Hydrogeologic Data

Water Well:

The iWaters database shows no water wells to be present within section 23, T32N, R6W.

Site Specific:

The San Jose formation is the highest water bearing zone at this site with the exception of possible perched water. It is the youngest Tertiary bedrock unit in the San Basin. The formation occurs at the surface to a depth of 2,325' at the existing San Juan 32-5 Unit #101S location and ranges from 1500' to 2500' in this township and range. The only potentially unstable areas in the region are over subsurface coal mines. This pit will not be located over a subsurface mine.


The Navajo Reservoir is greater than 1000 feet to the northwest. A visual inspection was also conducted to identify the possibility of water wells with windmills or other pumping equipment or other visual indications and none were observed. No other water well sites within 1000' were indicated being present by the USFS, Jicarilla Ranger District.

Geologic Summary:

The San Jose is a sequence of interbedded sandstones and mudstones deposited in an alluvial and fluvial environment. The formation accumulated in broad, wet, alluvial aprons. Groundwater is associated with the alluvial and fluvial sandstone aquifers, hence it is controlled by the distribution of these sands. The San Jose can further be broken into four members: Cuba Mesa, Regina, Llaves, and Tapicitos (in ascending order). The first two, Cuba Mesa and Regina, are predominately sandstone and the latter two, Llaves and Tapicitos, are predominately mudstone.

Reference:

Stone W.J., Lyford F.P., Frenzel P.F., Mizell N.H., and Padgett E.T.: Hydrology and water resources of San Juan Basin, New Mexico Hydrologic Report 6, 1983.

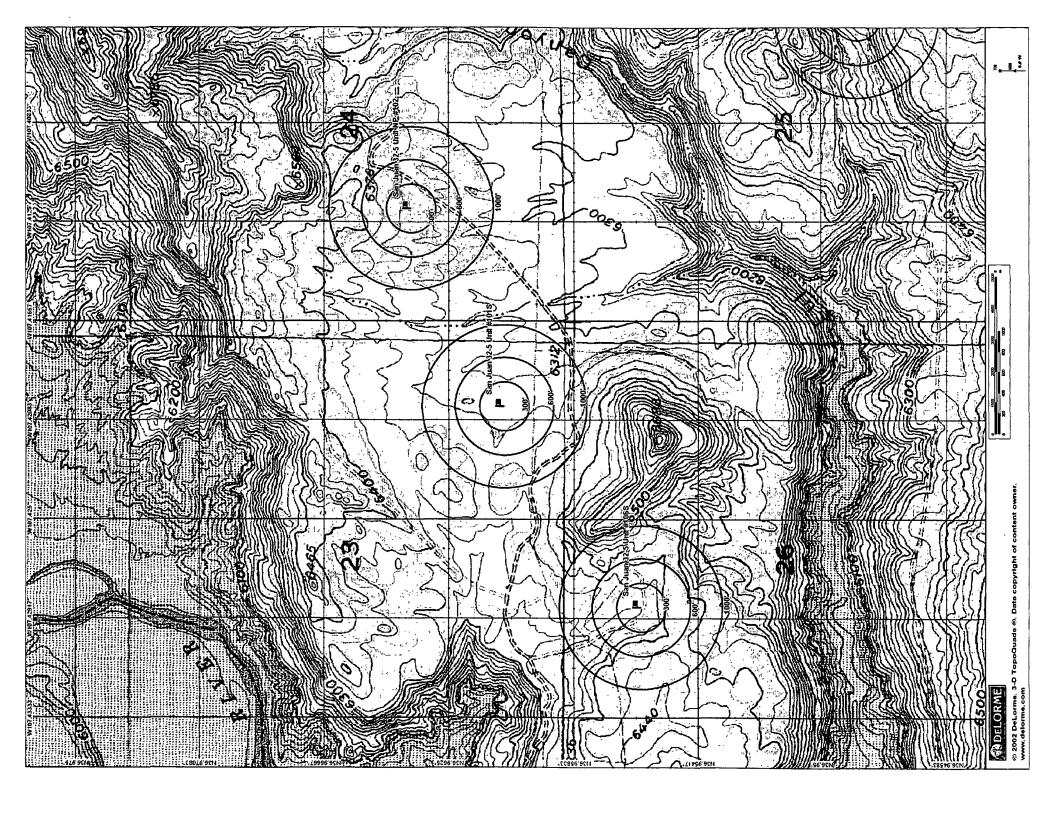



New Mexico Office of the State Engineer Water Column/Average Depth to Water

No records found.

PLSS Search:


Section(s): 23

Township: 32N

Range: 06W

MMQonline Public Version

Area of Interest

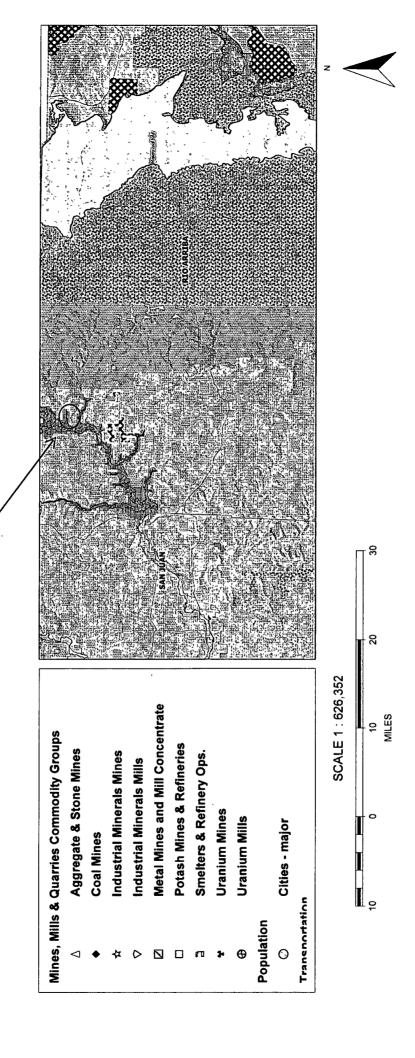

District I PO Box 1980, Hobbs, NM 88241-1980

District II PO Drawer DD, Antesia, NM 68211-0719

District III 1000 Aio Brazos Ad., Aztec. NM 87410

District IV PO Box 2088, Santa Fe, NM 87504-2088 State of New Mexico Energy Minerals & Natural Resources Department

OIL CONSERVATION DIVISION PO Box 2088 Santa Fe, NM 87504-2088

Form C-102 Revised February 21, 1994 Instructions on back Submit to Appropriate District Office State Lease – 4 Copies Fee Lease – 3 Copies

AMENDED REPORT

			WELL L	OCAT	A DNA NOI	CREAGE DED	ICA	TION PL	_AT		
			Pool Cod 71629		³Pool Name Basin Fruitland Coal						
'Property Code				S	Property Name 'Well Number SAN JUAN 32-5 UNIT 101S						
'OGRID No *Operator Name 162928 ENERGEN RESOURCES CORPORATION							°Elevation 6331				
				-	¹⁰ Sunface	Location	*******				
it or lot no	Section 23	3SN 10MU2P/ID	Range 6W	Lot Ion	Feet from the 710	SOUTH		et from the 780			County RIO ARRIBA
				Hole L	ocation I	f Different	Fro	om Surf	ace		
UL or law no	Section	Township	Range	Lot Ion	Feet from the	North/South line	Fe	et from the East/West line			County
² Dealcated Acres	320	0 Acres	- (E/2	?)	13 Joint on Infill	¹⁴ Consolidation Code	¹⁵ Orde	n No	1		· · · · · · · · · · · · · · · · · · ·
NO ALLOW	IABLE W					ON UNTIL ALL EEN APPROVED				EN CON	ISOL IDATED
2616.90				268	2.90'		17 OPERATOR CERTIFICATION I hereby certify that the information contained herein is true and complete to the best of my knowledge and belief				

