




New Mexico Com G1
San Juan County, New Mexico
Current Well Schematic as of 3-4-2010
Linear Rod Pump

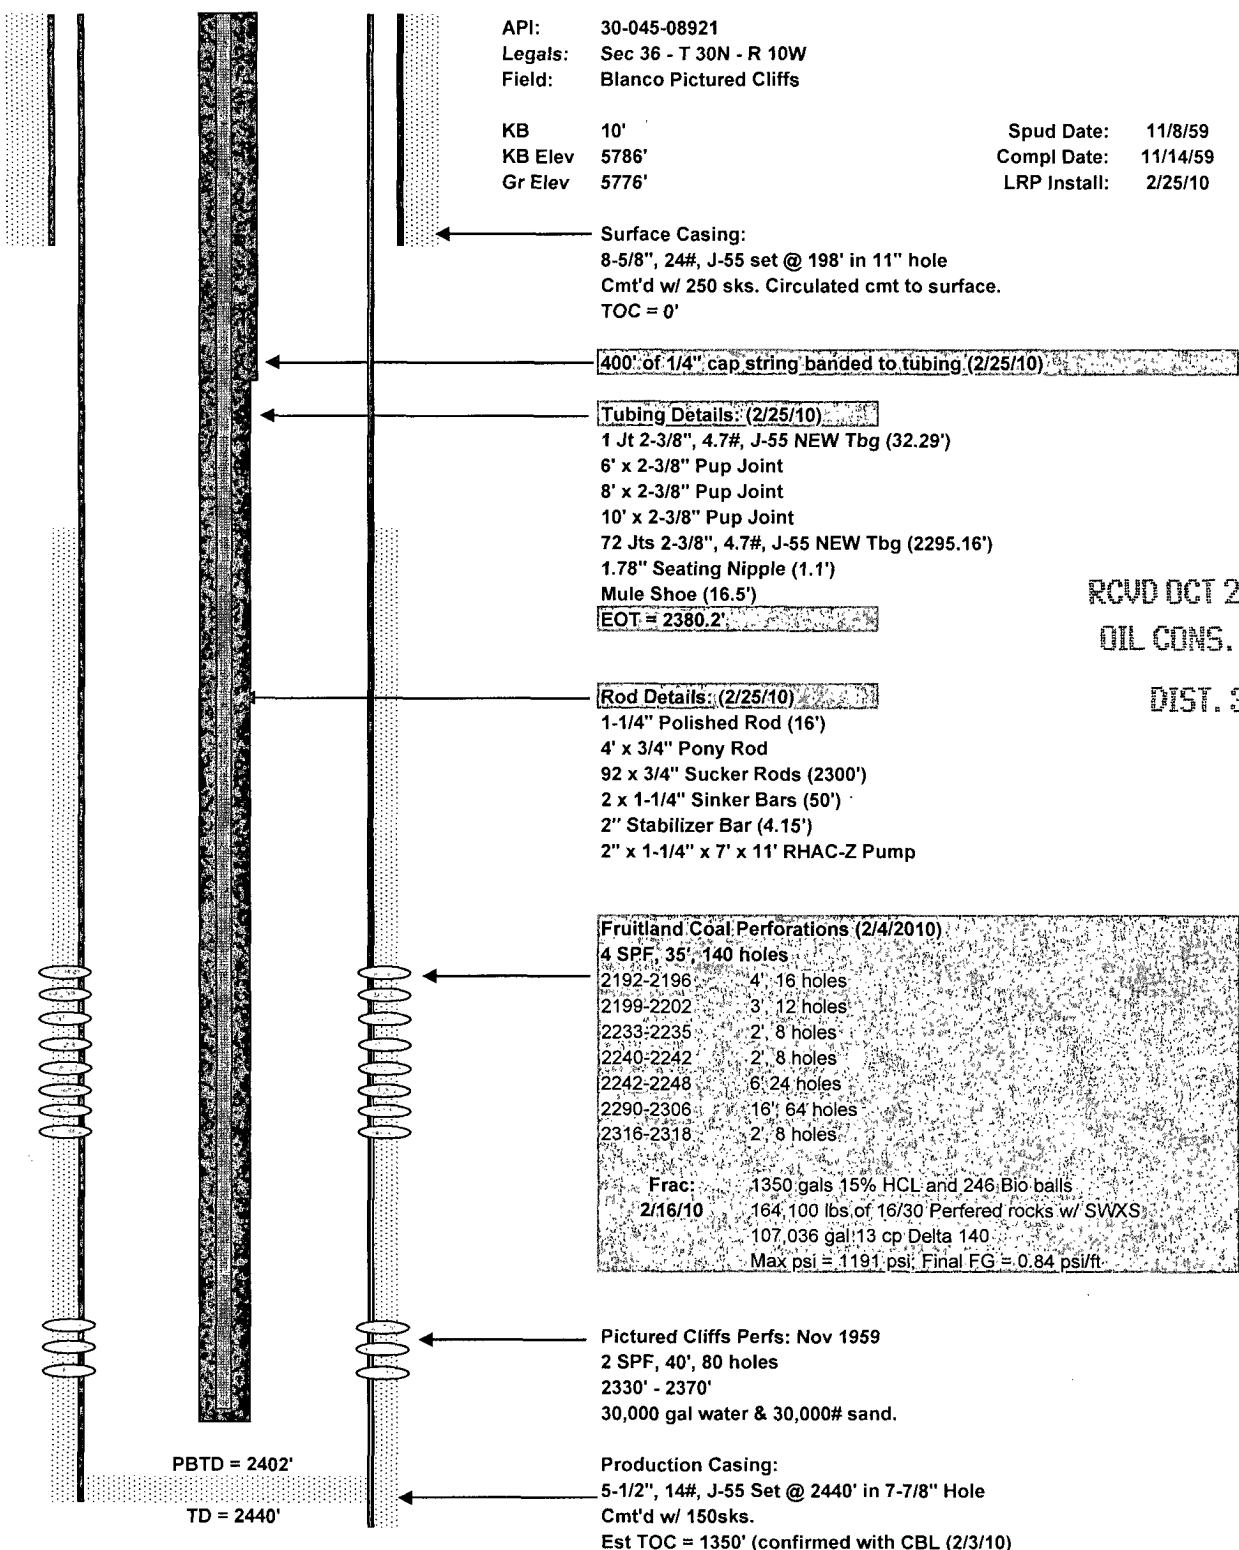

API: 30-045-08921
 Legals: Sec 36 - T 30N - R 10W
 Field: Blanco Pictured Cliffs

KB 10'
 KB Elev 5786'
 Gr Elev 5776'

Spud Date: 11/8/59
 Compl Date: 11/14/59
 LRP Install: 2/25/10

Surface Casing:
 8-5/8", 24#, J-55 set @ 198' in 11" hole
 Cmt'd w/ 250 sks. Circulated cmt to surface.
 TOC = 0'

400' of 1/4" cap string banded to tubing (2/25/10)

Tubing Details: (2/25/10)
 1 Jt 2-3/8", 4.7#, J-55 NEW Tbg (32.29')
 6' x 2-3/8" Pup Joint
 8' x 2-3/8" Pup Joint
 10' x 2-3/8" Pup Joint
 72 Jts 2-3/8", 4.7#, J-55 NEW Tbg (2295.16')
 1.78" Seating Nipple (1.1')
 Mule Shoe (16.5')
 EOT = 2380.2'

RCVD OCT 22 '10
 OIL CONS. DIV.
 DIST. 3

Rod Details: (2/25/10)
 1-1/4" Polished Rod (16')
 4' x 3/4" Pony Rod
 92 x 3/4" Sucker Rods (2300')
 2 x 1-1/4" Sinker Bars (50')
 2" Stabilizer Bar (4.15')
 2" x 1-1/4" x 7' x 11' RHAC-Z Pump

Fruitland Coal Perforations (2/4/2010)

4 SPF, 35', 140 holes	
2192-2196	4' 16 holes
2199-2202	3' 12 holes
2233-2235	2' 8 holes
2240-2242	2' 8 holes
2242-2248	6' 24 holes
2290-2306	16' 64 holes
2316-2318	2' 8 holes

Frac: 1350 gals 15% HCL and 246 Bio balls
 2/16/10 164,100 lbs of 16/30 Perfered rocks w/ SWXS
 107,036 gal 13 cp Delta 140
 Max psi = 1191 psi; Final FG = 0.84 psi/ft.

Pictured Cliffs Perfs: Nov 1959
 2 SPF, 40', 80 holes
 2330' - 2370'
 30,000 gal water & 30,000# sand.

Production Casing:
 5-1/2", 14#, J-55 Set @ 2440' in 7-7/8" Hole
 Cmt'd w/ 150sks.
 Est TOC = 1350' (confirmed with CBL (2/3/10))

Prepared by: Joy Leopold
 Date: 11/21/2007

Revised by: Joshua Veigel
 Date: 3/4/2010

