Form C-144 July 21, 2008

District I
1625 N. French Dr., Hobbs, NM 88240
District II
1301 W. Grand Avenue, Artesia, NM 88210
District III
1000 Rio Brazos Road, Aztec, NM 87410
District IV
1220 S. St. Francis Dr., Santa Fe; NM 87505

State of New Mexico Energy Minerals and Natural Resources Department Oil Conservation Division .

1220 South St. Francis Dr. Santa Fe, NM 87505 For temporary pits, closed-loop systems, and below-grade tanks, submit to the appropriate NMOCD District Office. For permanent pits and exceptions submit to the Santa Fe Environmental Bureau office and provide a copy to the appropriate NMOCD District Office.

7427

Pit, Closed-Loop System, Below-Grade Tank, or Proposed Alternative Method Permit or Closure Plan Application

Proposed Price Industry Office of Cooding Plant Application	
Type of action: Permit of a pit, closed-loop system, below-grade tank, or proposed alternative method	
Existing BGT Closure of a pit, closed-loop system, below-grade tank, or proposed alternative method	
Modification to an existing permit	
Closure plan only submitted for an existing permitted or non-permitted pit, closed-loop system	m,
below-grade tank, or proposed alternative method	
ons: Please submit one application (Form C-144) per individual pit, closed-loop system, below-grade tank or alternative requ	eșț

Instructions: Please submit one application (Form C-144) per individual pit, closed-loop system, below-grade tank or alternative request.

Please be advised that approval of this request does not relieve the operator of liability should operations result in pollution of surface water, ground water or the environment. Nor does approval relieve the operator of its responsibility to comply with any other applicable governmental authority's rules, regulations or ordinances.

Operator: XTO Energy, Inc.	60000 W 6000	
Operator: XTO Energy Inc. Address: #382 County Road 3100, Aztec, NM 87410	OGRID #: 5380	<u> </u>
Facility or well name: BLACK HILLS 25 #2	· · · · · · · · · · · · · · · · · · ·	
API Number: 30-045-31607 OCD Permit Number		
U/L or Qtr/Qtr O Section 25 Township 27N Range		
		000
Center of Proposed Design: Latitude 36.54088 Longitude	108:16833 NAD: 11927 X	983
Pit: Subsection F or G of 19.15:17.11 NMAC	RCVD DE	echo
Temporary: Drilling Workover	K.VIII	GO IV
☐ Permanent ☐ Emergency ☐ Cavitation ☐ P&A		.DIV.
☐ Lined ☐ Unlined Liner type: Thickness mil ☐ LLDPE ☐ HDPE	□ PVC □ Other □ □ DIST	. 3
String-Reinforced		_
Liner Seams: Welded Factory Other Volume:	bbl Dimensions: L x W	x D'
Closed-loop System: Subsection H of 19.15.17.11 NMAC	,	
Type of Operation: P&A Drilling a new well Workover or Drilling (Applies intent)	to activities which require prior approval of a permi	t or notice of
☐ Drying Pad ☐ Above Ground Steel Tanks ☐ Haul-off Bins ☐ Other		
Lined Unlined Liner type: Thickness mil LLDPE HDI	PE PVC Other	
Liner Seams: Welded Factory Other		
4		
Below-grade tank: Subsection I of 19.15.17.11 NMAC	. 4	
Volume: 120 bbl Type of fluid: Produced Water		
Tank Construction material: Steel		
Secondary containment with leak detection [Visible sidewalls, liner, 6-inch lift a	nd automatic overflow shut-off	
☐ Visible sidewalls and liner ☐ Visible sidewalls only ☒ Other Visible sidewalls	vaulted, automatic high-level shut off, no liner	
Liner type: Thickness mil HDPE PVC Other		
S. Alternative Method:		
Submittal of an exception request is required. Exceptions must be submitted to the Santa	a Fe Environmental Bureau office for consideration	of approval.
Form C-144 Oil Conservation Divisi	on Page 1 of 5	·

Fencing: Subsection D of 19.15.17.11 NMAC (Applies to permanent pits, temporary pits, and below-grade tanks) Chain link, six feet in height, two strands of barbed wire at top (Required if located within 1000 feet of a permanent residence, school, hinstitution or church). Four foot height, four strands of barbed wire evenly spaced between one and four feet Alternate. Please specify Four foot height, steel mesh field fence (hogwire) with pipe top railing	nospital,
Netting: Subsection E of 19.15.17.11 NMAC (Applies to permanent pits and permanent open top tanks) Screen Netting Other Expanded metal or solid vaulted top Monthly inspections (If netting or screening is not physically feasible)	
Signs: Subsection € of 19.15.17.11 NMAC □ 12"x 24", 2" lettering, providing Operator's name, site location, and emergency telephone numbers. □ Signed in compliance with 19.15.3.103 NMAC	
Administrative Approvals and Exceptions: Justifications and/or demonstrations of equivalency are required. Please refer to 19.15.17 NMAC for guidance. Please check a box if one or more of the following is requested, if not leave blank: Administrative approval(s): Requests must be submitted to the appropriate division district or the Santa Fe Environmental Bureau consideration of approval. Exception(s): Requests must be submitted to the Santa Fe Environmental Bureau office for consideration of approval.	office for
10. Siting Criteria (regarding permitting): 19.15.17.10 NMAC Instructions: The applicant must demonstrate compliance for each siting criteria below in the application. Recommendations of accept material are provided below. Requests regarding changes to certain siting criteria may require administrative approval from the appropriate or may be considered an exception which must be submitted to the Santa Fe Environmental Bureau office for consideration of a Applicant must attach justification for request. Please refer to 19.15.17.10 NMAC for guidance. Siting criteria does not apply to drying above-grade tanks associated with a closed-loop system.	priate district oproval
Ground water is less than 50 feet below the bottom of the temporary pit, permanent pit, or below-grade tank. - NM Office of the State Engineer - iWATERS database search; USGS, Data obtained from nearby wells	☐ Yes ⊠ No
Within 300 feet of a continuously flowing watercourse, or 200 feet of any other significant watercourse or lakebed, sinkhole, or playa lake (measured from the ordinary high-water mark). - Topographic map; Visual inspection (certification) of the proposed site	☐ Yes ⊠ No
Within 300 feet from a permanent residence, school, hospital, institution, or church in existence at the time of initial application. (Applies to temporary, emergency, or cavitation pits and below-grade tanks) - Visual inspection (certification) of the proposed site; Aerial photo, Satellite image	☐ Yes ⊠ No
Within 1000 feet from a permanent residence, school, hospital, institution, or church in existence at the time of initial application. (Applies to permanent pits) - Visual inspection (certification) of the proposed site; Aerial photo; Satellite image	☐ Yes ☐ No ☑ NA
Within 500 horizontal feet of a private, domestic fresh water well or spring that less than five households use for domestic or stock watering purposes, or within 1000 horizontal feet of any other fresh water well or spring, in existence at the time of initial application. NM Office of the State Engineer - iWATERS database search; Visual inspection (certification) of the proposed site	☐ Yes ☑ No
Within incorporated municipal boundaries or within a defined municipal fresh water well field covered under a municipal ordinance adopted pursuant to NMSA 1978, Section 3-27-3, as amended. - Written confirmation or verification from the municipality; Written approval obtained from the municipality	Yes No
Within 500 feet of a wetland. - US Fish and Wildlife Wetland Identification map; Topographic map; Visual inspection (certification) of the proposed site	☐ Yes 🛛 No
Within the area overlying a subsurface mine. - Written confirmation or verification or map from the NM EMNRD-Mining and Mineral Division	☐ Yes ☑ No
Within an unstable area: - Engineering measures incorporated into the design; NM Bureau of Geology & Mineral Resources; USGS; NM Geological Society; Topographic map	Yes No
Within a 100 year floodplain FEMA map	☐ Yes ☑ No

Temporary Pits, Emergency Pits, and Below-grade Tanks Permit Application Attachment Checklist: Subsection B of 19.15.17.9 NMAC Instructions: Each of the following items must be attached to the application. Please indicate, by a check mark in the box, that the documents are attached. Hydrogeologic Report (Below-grade Tanks) - based upon the requirements of Paragraph (4) of Subsection B of 19.15.17.9 NMAC Hydrogeologic Data (Temporary and Emergency Pits) - based upon the requirements of Paragraph (2) of Subsection B of 19.15.17.9 NMAC Siting Criteria Compliance Demonstrations - based upon the appropriate requirements of 19.15.17.10 NMAC Design Plan - based upon the appropriate requirements of 19.15.17.11 NMAC Operating and Maintenance Plan - based upon the appropriate requirements of 19.15.17.12 NMAC Closure Plan (Please complete Boxes 14 through 18, if applicable) - based upon the appropriate requirements of Subsection C of 19.15.17.9 NMAC and 19.15.17.13 NMAC
Previously Approved Design (attach copy of design) API Number: or Permit Number:
Closed-loop Systems Permit Application Attachment Checklist: Subsection B of 19.15.17.9 NMAC Instructions: Each of the following items must be attached to the application. Please indicate, by a check mark in the box, that the documents are attached. Geologic and Hydrogeologic Data (only for on-site closure) - based upon the requirements of Paragraph (3) of Subsection B of 19.15.17.9 Siting Criteria Compliance Demonstrations (only for on-site closure) - based upon the appropriate requirements of 19.15.17.10 NMAC
Design Plan - based upon the appropriate requirements of 19.15.17.11 NMAC Operating and Maintenance Plan - based upon the appropriate requirements of 19.15.17.12 NMAC Closure Plan (Please complete Boxes 14 through 18, if applicable) - based upon the appropriate requirements of Subsection C of 19.15.17.9 NMAC and 19.15.17.13 NMAC
Previously Approved Design (attach copy of design) API Number:
Previously Approved Operating and Maintenance Plan API Number: (Applies only to closed-loop system that use
above ground steel tanks or haul-off bins and propose to implement waste removal for closure)
Permanent Pits Permit Application Checklist: Subsection B of 19.15.17.9 NMAC Instructions: Each of the following items must be attached to the application. Please indicate, by a check mark in the box, that the documents are attached. Hydrogeologic Report - based upon the requirements of Paragraph (1) of Subsection B of 19.15.17.9 NMAC Siting Criteria Compliance Demonstrations - based upon the appropriate requirements of 19.15.17.10 NMAC Climatological Factors Assessment Certified Engineering Design Plans - based upon the appropriate requirements of 19.15.17.11 NMAC Dike Protection and Structural Integrity Design - based upon the appropriate requirements of 19.15.17.11 NMAC Leak Detection Design - based upon the appropriate requirements of 19.15.17.11 NMAC Quality Control/Quality Assurance Construction and Installation Plan Operating and Maintenance Plan - based upon the appropriate requirements of 19.15.17.11 NMAC Preeboard and Overtopping Prevention Plan - based upon the appropriate requirements of 19.15.17.11 NMAC Nuisance or Hazardous Odors, including H ₂ S, Prevention Plan Circumple P
Proposed Closure: 19.15.17.13 NMAC Instructions: Please complete the applicable boxes, Boxes 14 through 18, in regards to the proposed closure plan. Type: Drilling Workover Emergency Cavitation P&A Permanent Pit Below-grade Tank Closed-loop System Alternative Proposed Closure Method: Waste Excavation and Removal Waste Removal (Closed-loop systems only) On-site Closure Method (Only for temporary pits and closed-loop systems) In-place Burial On-site Trench Burial Alternative Closure Method (Exceptions must be submitted to the Santa Fe Environmental Bureau for consideration) Waste Excavation and Removal Closure Plan Checklist: (19:15.17:13 NMAC) Instructions: Each of the following items must be attached to the closure plan. Please indicate, by a check mark in the box, that the documents are attached.
Protocols and Procedures - based upon the appropriate requirements of 19.15.17.13 NMAC Confirmation Sampling Plan (if applicable) - based upon the appropriate requirements of Subsection F of 19.15.17.13 NMAC Disposal Facility Name and Permit Number (for liquids, drilling fluids and drill cuttings) Soil Backfill and Cover Design Specifications - based upon the appropriate requirements of Subsection H of 19.15.17.13 NMAC Re-vegetation Plan - based upon the appropriate requirements of Subsection I of 19.15.17.13 NMAC Site Reclamation Plan - based upon the appropriate requirements of Subsection G of 19.15.17.13 NMAC

Waste Removal Closure For Closed-loop Systems That Utilize Above Ground Steel Tanks or Haul-off Bins Only: (19.15.17.13.D NMAC) Instructions: Rease Indentify the facility or facilities for the disposal of liquids, drilling fluids and drill cuttings. Use attachment if more than two facilities are required.							
Disposal Facility Name: Disposal Facility Permit Number:							
Disposal Facility Name: Disposal Facility Permit Number:							
Will any of the proposed closed-loop system operations and associated activities occur on or in areas that will not be used for future service and operations? Yes (If yes, please provide the information below) No							
Required for impacted areas which will not be used for future service and operations: Soil Backfill and Cover Design Specifications based upon the appropriate requirements of Subsection H of 19.15.17.13 NMAC Re-vegetation Plan - based upon the appropriate requirements of Subsection I of 19.15.17.13 NMAC Site Reclamation Plan - based upon the appropriate requirements of Subsection G of 19.15.17.13 NMAC	C						
Siting Criteria (regarding on-site closure methods only): 19.15.17.10 NMAC Instructions: Each siting criteria requires a demonstration of compliance in the closure plan. Recommendations of acceptable source material are provided below. Requests regarding changes to certain siting criteria may require administrative approval from the appropriate district office or may be considered an exception which must be submitted to the Santa Fe Environmental Bureau office for consideration of approval. Justifications and/or demonstrations of equivalency are required. Please refer to 19.15:17.10 NMAC for guidance.							
Ground water is less than 50 feet below the bottom of the buried waste. - NM Office of the State Engineer - iWATERS database search; USGS; Data obtained from nearby wells	☐ Yes ☐ No ☐ NA						
Ground water is between 50 and 100 feet below the bottom of the buried waste NM Office of the State Engineer - iWATERS database search; USGS; Data obtained from nearby wells	Yes No						
Ground water is more than 100 feet below the bottom of the buried waste. - NM Office of the State Engineer - iWATERS database search; USGS, Data obtained from nearby wells	☐ Yes ☐ No ☐ NA						
Within 300 feet of a continuously flowing watercourse, or 200 feet of any other significant watercourse or lakebed, sinkhole, or playa lake (measured from the ordinary high-water mark). - Topographic map; Visual inspection (certification) of the proposed site	☐ Yes ☐ No						
Within 300 feet from a permanent residence, school, hospital, institution, or church in existence at the time of initial application. - Visual inspection (certification) of the proposed site; Aerial photo; Satellite image							
Within 500 horizontal feet of a private, domestic fresh water well or spring that less than five households use for domestic or stock watering purposes, or within 1000 horizontal feet of any other fresh water well or spring, in existence at the time of initial application. - NM Office of the State Engineer - iWATERS database; Visual inspection (certification) of the proposed site							
Within incorporated municipal boundaries or within a defined municipal fresh water well field covered under a municipal ordinance adopted pursuant to NMSA 1978, Section 3-27-3, as amended. - Written confirmation or verification from the municipality; Written approval obtained from the municipality	☐ Yes ☐ No						
Within 500 feet of a wetland US Fish and Wildlife Wetland Identification map; Topographic map; Visual inspection (certification) of the proposed site	☐ Yes ☐ No						
Within the area overlying a subsurface mine. - Written confirmation or verification or map from the NM EMNRD-Mining and Mineral Division	☐ Yes ☐ No						
Within an unstable area. - Engineering measures incorporated into the design; NM Bureau of Geology & Mineral Resources; USGS; NM Geological Society; Topographic map	☐ Yes ☐ No						
Within a 100-year floodplain FEMA map	☐ Yes ☐ No						
On-Site Closure Plan Checklist: (19.15.17.13 NMAC) Instructions: Each of the following items must be attached to the closure ple by a check mark in the box, that the documents are attached. Siting Criteria Compliance Demonstrations - based upon the appropriate requirements of 19.15.17.10 NMAC Proof of Surface Owner Notice - based upon the appropriate requirements of Subsection F of 19.15.17.13 NMAC Construction/Design Plan of Burial Trench (if applicable) based upon the appropriate requirements of 19.15.17.11 NMAC Construction/Design Plan of Temporary Pit (for in-place burial of a drying pad) - based upon the appropriate requirements of 19.15.17.13 NMAC Confirmation Sampling Plan (if applicable) - based upon the appropriate requirements of Subsection F of 19.15.17.13 NMAC Waste Material Sampling Plan - based upon the appropriate requirements of Subsection F of 19.15.17.13 NMAC Disposal Facility Name and Permit Number (for liquids, drilling fluids and drill cuttings or in case on-site closure standards cann Soil Cover Design - based upon the appropriate requirements of Subsection H of 19.15.17.13 NMAC Re-vegetation Plan - based upon the appropriate requirements of Subsection G of 19.15.17.13 NMAC	15.17.11 NMAC						

19. Operator Application Certification:	
I hereby certify that the information submitted with this application is true, acc	urate and complete to the best of my knowledge and belief.
Name (Print): Kim Champlin	Title: Environmental Representative
Signature: 1/2, im Champlin	Date: 11-18-08
e-mail address: kim_champlin@xtoenergy.com	Telephone: (505) 333-3100
20.	
OCD Approval: Permit Application (including closure plan) Closure	Rian (only) OCD Conditions (see attachment)
OCD Representative Signature:	Approval Date: 10/12/10
Title: Encanufal Egner	OCD Permit Number:
21. Closure Report (required within 60 days of closure completion): Subsection Instructions: Operators are required to obtain an approved closure plan prior The closure report is required to be submitted to the division within 60 days of section of the form until an approved closure plan has been obtained and the	or to implementing any closure activities and submitting the closure report. If the completion of the closure activities. Please do not complete this
n.	
Closure Method: Waste Excavation and Removal On-Site Closure Method Alter If different from approved plan, please explain.	rnative Closure Method
23. Closure Report Regarding Waste Removal Closure For Closed-loop System	That Halling About Council Sandimake on Haul of Ding Only
Instructions: Please indentify the facility or facilities for where the liquids, d two facilities were utilized.	
Disposal Facility Name:	Disposal Facility Permit Number:
Disposal Facility Name:	Disposal Facility Permit Number:
Were the closed-loop system operations and associated activities performed on Yes (If yes, please demonstrate compliance to the items below) No	or in areas that will not be used for future service and operations?
Required for impacted areas which will not be used for future service and open	ations:
☐ Site Reclamation (Photo Documentation) ☐ Soil Backfilling and Cover Installation	
Re-vegetation Application Rates and Seeding Technique	
Closure Report Attachment Checklist: Instructions: Each of the following mark in the box, that the documents are attached.	tiems must be attached to the closure report. Please indicate, by a check
☐ Proof of Closure Notice (surface owner and division) attach ecl ☐ Proof of Deed Notice (required for on-site closure)	
☐ Plot Plan (for on-site closures and temporary pits) ☐ Confirmation Sampling Analytical Results (if applicable) a hack d	•
waste iviateriai Sampling Analytical Results (required for on-site closure	e) ·
Disposal Facility Name and Permit Number a flac wed Soil Backfilling and Cover Installation per Och Socificat	ion S
☐ Re-vegetation Application Rates and Seeding Technique Per ☐ ☐ Site Reclamation (Photo Documentation) ← ₩ας Ης	M MOU
	gitude NAD: 1927 1983
25. Operator Closure Certification:	
I hereby certify that the information and attachments submitted with this closure belief. I also certify that the closure complies with all applicable closure require	rements and conditions specified in the approved closure plan.
Name (Print): James Ac Danie	Title: EHAS Specialist
Simonyani /// L.	12/2/
Signature:	Date: 12/3/10
e-mail address: James _ McDaniel Oxfornergy. Co	

XTO Energy Inc. San Juan Basin Below Grade Tank Closure Report

Lease Name: Blackhills 25-2 API No.: 30-045-31607

Description: Unit O, Section 25, Township 27N, Range 13W, San Juan County

In accordance with Rule 19.15.17.13 NMAC the following information describes the closure requirements of below-grade tanks on XTO Energy Inc. (XTO) locations. This is XTO's standard procedure for all below-grade tanks. A separate plan will be submitted for any below-grade tank which does not conform to this plan.

General Plan

1. XTO will close below-grade tanks within the time periods provided in 19.15.17.13 NMAC, or by an earlier date that the division requires because of imminent danger to fresh water, public health or the environment.

Closure Date is October 25, 2010

- 2. XTO will close a below-grade tank that does not meet the requirements of Paragraphs (1) through (4) of Subsection I of 19.15.17.11 NMAC or is not included in Paragraph (5) of Subsection I of 19.15.17.11 NMAC within five years after June 16, 2008, if not retrofitted to comply with Paragraphs (1) through (4) of Subsection I of 19.15.17.11 NMAC.
 - Closure Date is October 25, 2010
- 3. XTO will close a permitted below-grade tank within 60 days of cessation of the below-grade tank's operation or as required by the transitional provisions of Subsection B of 19.15.17.17 NMAC in accordance with a closure plan that the appropriate division district office approves. The closure report will be filed on form C-144.

Required C-144 Form is attached to this document.

RCVD DEC 6'10 OIL CONS. DIV.

4. XTO will remove liquids and sludge from below-grade tanks prior to implementing a closure method and will dispose of the liquids and sludge in a division-approved facility. Approved facilities and waste streams include:

Envirotech Permit No. NM01-0011 and IEI Permit No. NM 01-0010B Soil contaminated by exempt petroleum hydrocarbons Produced sand, pit sludge and contaminated bottoms from storage of exempt wastes

Basin Disposal Permit No. NM01-005 Produced water

All liquids and sludge were removed from the tank prior to closure activities.

5. XTO will remove the below-grade tank and dispose of it in a division approved facility or recycle, reuse, or reclaim it in a manner that the appropriate division district office approves. XTO has removed the below grade tank, and will dispose of it at a division approved facility, or recycle, reclaim or reuse it in a manner that is approved by the division.

6. XTO will remove any on-site equipment associated with a below-grade tank unless the equipment is required for some other purpose.

All equipment has been removed due to the plugging and abandoning of the Blackhills 25-2 well site.

7. XTO will test the soils beneath the below-grade tank to determine whether a release has occurred. At a minimum 5 point composite sample will be collected along with individual grab samples from any area that is wet, discolored or showing other evidence of a release. Samples will be analyzed for BTEX, TPH and chlorides to demonstrate that the benzene concentration, as determined by EPA SW-846 methods 8021B or 8260B or EPA method that the division approves, does not exceed 0.2 mg/kg; total BTEX concentration, as determined by EPA SW-846 methods 8021B or 8260B or other EPA method that the division approves, does not exceed 50 mg/kg; the TPH concentration, as determined by EPA method 418.1 or other EPA method that the division approves, does not exceed 100mg/kg; and the chloride concentration, as determined by EPA method 300.1 or other EPA method that the division approves, does not exceed 250 mg/kg, or the background concentration, whichever is greater. XTO will notify the division of its results on form C-141.

A five point composite sample was taken of the pit using sampling tools and all samples tested per Subsection B of 19.15.17.1 3(B)(1)(b). (Sample results attached).

Components	Test Method	Limit (mg/Kg)	Results
Benzene	EPA SW-846 8021B or 8260B	0.2	BDL mg/kg
BTEX	EPA SW-846 8021B or 8260B	50	BDL mg/kg
TPH	EPA SW-846 418.1	100	47.3 mg/kg
Chlorides	EPA 300.1	250 or background	42 mg/kg

8. If XTO or the division determines that a release has occurred, XTO will comply with 19.15.3.116 NMAC and 19.15.1.19NMAC as appropriate.

No release was confirmed for this location. The samples results are attached for your reference.

9. If the sampling program demonstrates that a release has not occurred or that any release does not exceed the concentrations specified in Paragraph (4) of Subsection E of 19.15.17.13 NMAC, XTO will backfill the excavation with compacted, non-waste containing, earthen material; construct a division prescribed soil cover; recontour and re-vegetate the site.

The pit cellar was backfilled using compacted, non-waste containing earthen material, with a division prescribed soil cover.

10. Notice of Closure operations will be given to the Aztec Division District III office between 72 hours and one week prior to the start of closure activities via email or verbally.

The notification will include the following:

- i. Operator's name
- ii. Well Name and API Number
- ii. Location by Unit Letter, Section, Township, and Range

Notification was provided to Mr. Brandon Powell with the Aztec office of the OCD via email on October 20, 2010; see attached email printout.

The surface owner shall be notified of XTO's proposal to close the BGT as per the approved closure plan using certified mail, return receipt requested.

The surface owner was notified on October 21, 2010; see attached letter and return receipt.

11. Re-contouring of location will match fit, shape, line, form and texture of the surrounding area. Re-shaping will include drainage control, prevent ponding, and prevent erosion. Natural drainages will be unimpeded and water bars and/or silt traps will be placed in areas where needed to prevent erosion on a large scale. Final re-contour shall have a uniform appearance with smooth surface, fitting the natural landscape.

The site has been recontoured to match the above mentioned specifications.

12. A minimum of 4 feet of cover shall be achieved and the cover shall include 1 foot of suitable material to establish vegetation at the site, or the background thickness of topsoil, whichever is greater.

The site has been backfilled to match these specifications.

13. XTO will seed the disturbed areas the first growing season after the operator closes the pit. Seeding will be accomplished via drilling on the contour whenever practical or by other division-approved methods. BLM or Forest Service stipulated seed mixes will be used on federal lands. Vegetative cover will equal 70% of the native perennial vegetative cover (un-impacted) consisting of at least three native plant species, including at least one grass, but not including noxious weeds, and maintain that cover through two successive growing seasons. Repeat seeding or planting will be continued until successful vegetative growth occurs.

The location will be reclaimed pursuant to the BLM MOU.

- 14. All closure activities will include proper documentation and be available for review upon request and will be submitted in closure report form to OCD within 60 days of closure of the below-grade tank. Closure report will be filed on form C-144 and incorporate the following:
 - i. Proof of closure notice to division and surface owner; attached
 - ii. Details on capping and covering, where applicable; per OCD Specifications
 - iii. Inspection reports; None Found
 - iv. Confirmation sampling analytical results; attached
 - v. Disposal facility name(s) and permit number(s); see above
 - vi. Soil backfilling and cover installation; per OCD Specifications
 - vii. Re-vegetation application rates and seeding techniques, (or approved alternative to re-vegetation-requirements if applicable); **Per BLM MOU**
 - viii. Photo documentation of the site reclamation, attached

District 1
1625 N. French Dr., Hobbs, NM 88240
District II
1301 W. Grand Avenue, Artesia, NM 88210
District III
1000 Rio Brazos Road, Aztec, NM 87410 District IV 1220 S. St. Francis Dr., Santa Fe, NM 87505

State of New Mexico Energy Minerals and Natural Resources

Oil Conservation Division 1220 South St. Francis Dr. Santa Fe, NM 87505

Submit 2 Copies to appropriate District Office in accordance with Rule 116 on back

side of form

Form C-141 Revised October 10, 2003

Release Notification and Corrective Action

OPERATOR Initial Report							Final Report				
Name of Co	mpany: X	TO Energy,	Inc.				nes McDaniel				
Address: 38	2 Road 31	00, Aztec, N	lew Mexi	co 87410	7	Telephone N	Jo.: (505) 333-3	701			
Facility Nar	ne: Blackh	ills 25-2 (30	-045-316	607)	I	Facility Typ	e: Gas Well (Fr	uitland)			
Surface Ow	nam Endam			Minaral C	\			Lease N	ī.		
Surface Ow	ner: Feder	<u>ai</u>		Mineral C	wner:		·	Lease N	10.:		
				LOCA		OF REI	LEASE				
Unit Letter	Section	Township	Range	Feet from the		South Line	Feet from the	East/West Line	County		
0	25	27N	13W	685		FSL	1975	FEL	San Juan		
						Longitud	e: -108.16833 EASE		<u> </u>		
Type of Relea	ase: None						Release: NA		Recovered: N	ΝA	
Source of Re							our of Occurrenc	e: NA Date and	Hour of Disc	covery:	NA
Was Immedia	ite Notice (_	., _			If YES, To	Whom?				
		L	Yes	No 🛛 Not Re	equired						
By Whom?						Date and H					
Was a Water	course Read		V [7	l x ₁ -		If YES, Vo	lume Impacting t	he Watercourse.			
			_	-							
If a Watercou	irse was Im	pacted, Descr	ibe Fully.	•					RCVD DE	C6'1	.0
	Describe Cause of Problem and Remedial Action Taken.*										
No release has occurred at this location. OIL CONS. DIV. DIST 3											
Describe Are No release ha				ten.* able analytical res	ults are	attached for y	our reference.			-	
regulations al public health should their o	I operators or the envi- operations hament. In a	are required to ronment. The ave failed to a ddition, NMC	o report ar acceptant adequately OCD accep	nd/or file certain rece of a C-141 reporting and received investigate and received.	elease no ort by the emediate	otifications and NMOCD me contaminati	nd perform correct arked as "Final R on that pose a thr	inderstand that purs stive actions for rele eport" does not reli eat to ground water responsibility for co	eases which leve the oper , surface wa	may en ator of ter, hu	ndanger Tiability man health
	/	///	/ .	j			OIL CON	SERVATION	DIVISIO	N	
Signature:	///			<i>[</i> .							
Signature.						A he.	Distaist Communic	a m t			
Printed Name	e: James Mo	Daniel			1 4	Approved by	District Supervis	or:			
Title: EH&S	Specialist					Approval Dat	e:	Expiration	Date:	·· <u>·</u>	
E-mail Addre	ess: James_	McDaniel@xi	oenergy.c	om		Conditions of	Approval:		Attached		
Date: 12/2/20	010		P	hone: 505-333-37	01						

^{*} Attach Additional Sheets If Necessary

EPA METHOD 418.1 TOTAL PETROLEUM HYDROCARBONS

		•
XTO	Project #:	98031-0528
BGT Composite	Date Reported:	10 - 25-10
56255	Date Sampled:	10-19-10
10562	Date Received:	10-19-10
Soil	Date Extracted:	10-25-10
Cool	Date Analyzed:	10-25-10
Intact	Analysis Needed:	TPH-418.1
	BGT Composite 56255 10562 Soil Cool	BGT Composite Date Reported: 56255 Date Sampled: 10562 Date Received: Soil Date Extracted: Cool Date Analyzed:

		Det.
	Concentration	Limit
Parameter	(mg/kg)	(mg/kg)

Total Petroleum Hydrocarbons

47.3

7.9

ND = Parameter not detected at the stated detection limit.

References:

Method 418.1, Petroleum Hydrocarbons, Total Recoverable, Chemical Analysis of Water

and Waste, USEPA Storet No. 4551, 1978.

Comments:

Blackhills 25-2

Analyst

Review



EPA METHOD 418.1 TOTAL PETROLEUM **HYROCARBONS QUALITY ASSURANCE REPORT**

Client: Sample ID: QA/QC

Project #:

N/A

QA/QC

Date Reported:

10-25-10

Laboratory Number:

10-25-TPH,QA/QC 56267

Date Sampled:

N/A

Sample Matrix:

Freon-113

Date Analyzed: Date Extracted: 10-25-10

Preservative: Condition:

N/A N/A

Analysis Needed:

10-25-10 **TPH**

Calibration

I-Cal Date

C-Cal Date

I-Cal RF: C-Cal RF:

% Difference

Accept. Range

10-05-10

10-25-10

1,640

1,670

1.8%

+/- 10%

Blank Conc. (mg/Kg)

Concentration

Detection Limit

TPH

ND

7.9

% Difference Accept. Range

Duplicate Conc. (mg/Kg) **TPH**

Sample 47.3

Duplicate 46.0

2.7%

+/- 30%

Spike Conc. (mg/Kg)

Sample

Spike Added Spike Result

% Recovery

TPH

47.3

2,000

1.710

83.5%

Accept Range 80 - 120%

ND = Parameter not detected at the stated detection limit.

References:

Method 418.1, Petroleum Hydrocarbons, Total Recoverable, Chemical Analysis of Water

and Waste, USEPA Storet No. 4551, 1978.

Comments:

QA/QC for Samples 56255-56257, 56294-56296

Analyst

CHAIN OF CUSTODY RECORD

				5				S						[
Client:		B $ B $ $ B $	Ocation:	25	g						INALY	SIS / P	ARAM	ANALYSIS / PARAMETERS				
Client Address: 360		Sampler Name:	, <u>S</u>	e i			(3108			ı	<u></u>		>					
Client Phone No.:		Client No.: $ d(g(0, 2)) $	6-16	-0578		,	hodiel	(Method	Method S Meta	noinA \		I/H diw	(1.814				looO ə	e Intact
Sample No./ Sample Identification Date	nple Sample tte Time		σ 2	Sample Matrix	No./Volume Preservative of Hod Ho	Preservation				Cation	RCI		PAH HAT	СНГО			Sampl	Sampl
7. 16		51625		Sludge	1/402	\ <u> \</u>		 					X				>-	7
			Soil	Sludge Aqueous														
			Soil	Sludge Aqueous														
			Soil	Sludge Aqueous														
			Soil	Sludge Aqueous									,					
			Soil	Sludge Aqueous														
			Solid	Sludge Aqueous										•				
			Soil	Sludge Aqueous														
			Soil	Sludge Aqueous									,					
1	1		Soil	Sludge Aqueous					, <u>.</u>		1					_		
Relinquished by: (Signature)	1			Date 19/19/10	Time	Received by: (Signature)	ed by: (Signatu	<u>@</u>		1/2	1 -			11	Date Time (19)19/10 (10:24)	Tir 160:	Time 10:2 <i>b</i>
Belinquished by: (Signature)						Received by: (Signature)	ed by: (Signatu	ê									•
Relinquished by: (Signature)						Received by: (Signature)) :d pa	Signatu	(e)									
NO RUSH	H51			m	envirotech Analytical Laboratory	Nirotech Analytical Laboratory	Lab	Oraț										
		9679	S Highwa	5796 US Highway 64 • Farmington, NM 87401 • 505-632-0615 • lab@envirotech-inc.com	gton, NM 874	01 • 505-6	32-0615	• lab@	envirote	ch-inc.c	E			71100	ACCENT	ACCENT Printing • Form 28-0807	Form 28	3-0807



12065 Lebanon Rd. Mt. Juliet, TN 37122 (615) 758-5858 1-800-767-5859 Fax (615) 758-5859

Tax I.D. 62-0814289

Est. 1970

James McDaniel XTO Energy - San Juan Division 382 Road 3100 Aztec, NM 87410

Report Summary

Wednesday October 27, 2010

Report Number: L485048 Samples Received: 10/21/10 Client Project:

Description: Blackhills 25-2

The analytical results in this report are based upon information supplied by you, the client, and are for your exclusive use. If you have any questions regarding this data package, please do not hesitate to call.

Entire Report Reviewed By:

Laboratory Certification Numbers

A2LA - 1461-01, AIHA - 100789, AL - 40660, CA - I-2327, CT - PH-0197, FL - E87487 GA - 923, IN - C-TN-01, KY - 90010, KYUST - 0016, NC - ENV375/DW21704, ND - R-140, NJ - TN002, NJ NELAP - TN002, SC - 84004, TN - 2006, VA - 00109, WV - 233 AZ - 0612, MN - 047-999-395, NY - 11742, WI - 998093910, NV - TN000032008A, TX - T104704245, OK-9915

Accreditation is only applicable to the test methods specified on each scope of accreditation held by ESC Lab Sciences. Note: The use of the preparatory EPA Method 3511 is not approved or endorsed by the CA ELAP.

This report may not be reproduced, except in full, without written approval from ESC Lab Sciences. Where applicable, sampling conducted by ESC is performed per guidance provided in laboratory standard operating procedures: 060302, 060303, and 060304.



12065 Lebanon Rd. Mt. Juliet, TN 37122 (615) 758-5858 1-800-767-5859 Fax (615) 758-5859

Tax I.D. 62-0814289

Est. 1970

REPORT OF ANALYSIS

October 27,2010

James McDaniel XTO Energy - San Juan Division 382 Road 3100 Aztec, NM 87410

ESC Sample # : L485048-01

Date Received : October 21, 2010
Description : Blackhills 25-2

Site ID : BLACK HILLS 25-2

: BGT COMPOSITE Sample ID

Project # :

Collected By : James McDaniel Collection Date : 10/19/10 15:30

Parameter	Dry Result	Det. Limit	Units	Method	Date	Dil.
Chloride	42.	12.	mg/kg	9056	10/27/10	1
Total Solids	85.0		8	2540G	10/27/10	1
Benzene Toluene Ethylbenzene Total Xylene TPH (GC/FID) Low Fraction Surrogate Recovery-%	BDL BDL BDL BDL BDL	0.0029 0.029 0.0029 0.0088 0.59	mg/kg mg/kg mg/kg mg/kg mg/kg	8021/8015 8021/8015 8021/8015 8021/8015 GRO	10/22/10 10/22/10 10/22/10 10/22/10 10/22/10	5 5 5 5 5
a,a,a-Trifluorotoluene(FID) a,a,a-Trifluorotoluene(PID)	98.7 104.		% Rec. % Rec.	8021/8015 8021/8015	10/22/10 10/22/10	5 5
TPH (GC/FID) High Fraction	BDL	4.7	mg/kg	3546/DRO	10/25/10	1
Surrogate recovery(%) o-Terphenyl	51.8		% Rec.	3546/DRO	10/25/10	1

Results listed are dry weight basis. BDL - Below Detection Limit Det. Limit - Practical Quantitation Limit(PQL)

Note:
This report shall not be reproduced, except in full, without the written approval from ESC.
The reported analytical results relate only to the sample submitted
Reported: 10/27/10 14:41 Printed: 10/27/10 14:41

Summary of Remarks For Samples Printed 10/27/10 at 14:41:52

TSR Signing Reports: 288 R5 - Desired TAT

report J's if above limits-B 0.01, T 0.75, E 0.75, X 0.62 mg/l

Sample: L485048-01 Account: XTORNM Received: 10/21/10 09:00 Due Date: 10/28/10 00:00 RPT Date: 10/27/10 14:41



XTO Energy - San Juan Division James McDaniel 382 Road 3100

Aztec, NM 87410

12065 Lebanon Rd. Mt. Juliet, TN 37122 (615) 758-5858 1-800-767-5859 Fax (615) 758-5859

Tax I.D. 62-0814289

Est. 1970

Quality Assurance Report Level II

L485048

October 27, 2010

	-	Laboratory 1	al'ank i			
Analyte	Result	Units	% Rec	Limit	Batch D	ate Analyzed
Benzene Ethylbenzene Toluene	< .0005 < .0005 < .005	mg/kg mg/kg mg/kg		·	WG504670 1 WG504670 1	0/22/10 14:55 0/22/10 14:55 0/22/10 14:55
TPH (GC/FID) Low Fraction Total Xylene	< .1 < .0015	mg/kg mg/kg			WG504670 1 WG504670 1	0/22/10 14:55 0/22/10 14:55
a,a,a-Trifluorotoluene(FID) a,a,a-Trifluorotoluene(PID)		% Rec. % Rec.	99.43	59-128 54-144	WG504670 1	0/22/10 14:55 0/22/10 14:55
TPH (GC/FID) High Fraction o-Terphenyl	< 4	ppm % Rec.	65.78	50-150	WG504885 1 WG504885 1	0/25/10 13:40 0/25/10 13:40
Total Solids					WG505180 1	0/27/10 11:23
Chloride	< 10	mg/kg		are the television to approxima	WG504944 1	0/26/10 21:49
Analyte	Units	Duplicat Result Dupl		Limit	Ref Samp	Batch
Total Solids	§ . 8ē	.0. 85.0	1.07	5 .	L485048-0	i WG505180
	-	ribanahaddi dank	iii camii			"
Analyte	Units	Laboratory Conti Known Val	Result	% Rec	Limit	Batch
Benzene Ethylbenzene	mg/kg mg/kg	.05	0.0501 0.0518	100.	76-113 78-115	WG504670 WG504670
Toluene Total Xylene a,a,a-Trifluorotoluene(FID)	mg/kg mg/kg	.15	0.0516 0.158	103. 105. 98.65	76-114 81-118 59-128	WG504670 WG504670 WG504670
a,a,a-Trifluorotoluene (PID) TPH (GC/FID) Low Fraction a,a,a-Trifluorotoluene (FID) a,a,a-Trifluorotoluene (PID)	mg/kg	5.5	6.00	101.9 109. 93.78 106.0	54-144 67-135 59-128 54-144	WG504670 WG504670 WG504670 WG504670
TPH (GC/FID) High Fraction o-Terphenyl	ppm	60	46.2	76.9 78.37	50-150 50-150	WG504885 WG504885
Total Solids	· · · · · · · · · · · · · · · · · · ·	50	50.0	99.9	85-115	WG505180
Chloride	mg/kg	200	199.	. 99.5	85-115	WG504944
	Labora	atory Control Sa	ample Duplicate			
Analyte	Units Resu		%Rec	Limit R	PD Limit	Batch
Benzene Ethylbenzene Toluene	mg/kg 0.050 mg/kg 0.05 mg/kg 0.05	L6 0.0518	100. 103. 102.	78-115 0	.0900 20 .290 20 .31 20	WG504670 WG504670 WG504670
Total Xylene a,a,a-Trifluorotoluene(FID)	mg/kg 0.15		104.		690 20	WG504670
a,a,a-Trifluorotoluene(PID) TPH (GC/FID) Low Fraction a,a,a-Trifluorotoluene(FID)	mg/kg 6.02	6.00	101.5 109. 92.90	54-144	.320 20	WG504670 WG504670 WG504670
a,a,a-Trifluorotoluene(PID) * Porformance of this Analyte	is outside of ost	ablished crite	105.7	54-144		WG504670

a,a,a-Trifluorotoluene(PID) 105.7 54-144

* Performance of this Analyte is outside of established criteria.
For additional information, please see Attachment A 'List of Analytes with QC Qualifiers.'



XTO Energy - San Juan Division James McDaniel 382 Road 3100

Aztec, NM 87410

12065 Lebanon Rd. Mt. Juliet, TN 37122 (615) 758-5858 1-800-767-5859 Fax (615) 758-5859

Tax I.D. 62-0814289

Est. 1970

Quality Assurance Report Level II

L485048

October 27, 2010

Analyte		Result	Control Sa Ref	mple Dupl %Rec	icate	Limit	RPD	Limit	Batch
TPH (GC/FID) High Fraction o-Terphenyl	ppm	47.6	46.2	79.0 81.12		50-150 50-150	3.05	20	WG50488 WG50488
Chloride	mg/kg	212.	199.	106.		85-115	6.33	20	. WG50494
		:	Matrix Spi	ke					
Analyte	Units	MS Res	Ref Res	TV	% Rec	Limit		Ref Samp	Batch
Benzene Ethylbenzene	mg/kg mg/kg	0.237	0	.05	94.8	32-137 10-150		L485048-01 L485048-01	WG50467 WG50467
Toluene Total Xylene a,a,a-Trifluorotoluene(FID)	mg/kg mg/kg	0.249	0	.05 .15	99.7 102. 97.01	20-142 16-141 59-128		L485048-01 L485048-01	WG50467 WG50467 WG50467
a,a,a-Trifluorotoluene(PID) TRH (GC/FID) Low Fraction a,a,a-Trifluorotoluene(FID)	mg/kg	26.6	0	5.5	100.8 96.8 91.50	54-144 55-109		L485048-01	WG50467 WG50467 WG50467
a,a,a-Trifluorotoluene(PID) TPH (GC/FID) Low Fraction a,a,a-Trifluorotoluene(FID) a,a,a-Trifluorotoluene(PID)	mg/kg	25.6	0	5.5	105.4 93.2 92.36 104.9	54-144 55-109 59-128 54-144		L485048-01	WG50467 WG50467 WG50467 WG50467
TPH (GC/FID) High Fraction o-Terphenyl	ppm	46.0	0.521	60	75.8 83.98	50-150 50-150		L485446-05	WG50488 WG50488
Analyte	Units	MSD Matr	ix Spike Du Ref %R		Limit	RPD	Limit	Ref Samp	Batch
Benzene Ethylbenzene Toluene Total Xylene a,a,a-Trifluorotoluene(FID) a,a,a-Trifluorotoluene(PID)	mg/kg mg/kg mg/kg mg/kg	0.252		1. 1.	32-137 10-150 20-142 16-141 59-128 54-144	1.13	39 44 42 46	L485048-01 L485048-01 L485048-01 L485048-01	WG50467 WG50467 WG50467 WG50467 WG50467 WG50467
TPH (GC/FID) High Fraction o-Terphenyl	ppm	47.8	46.0 78	.8 1.54	50-150 50-150		20	L485446-05	WG50488 WG50488

Batch number /Run number / Sample number cross reference

WG504670: R1440489: L485048-01' WG504885: R1443596: L485048-01 WG505180: R1445057: L485048-01 WG504944: R1445169: L485048-01

 ^{*} Calculations are performed prior to rounding of reported values .
 * Performance of this Analyte is outside of established criteria.
 For additional information, please see Attachment A 'List of Analytes with QC Qualifiers.'



XTO Energy - San Juan Division James McDaniel 382 Road 3100

Aztec, NM 87410

Quality Assurance Report Level II

L485048

12065 Lebanon Rd. Mt. Juliet, TN 37122 (615) 758-5858 1-800-767-5859 Fax (615) 758-5859

Tax I.D. 62-0814289

Est. 1970

October 27, 2010

The data package includes a summary of the analytic results of the quality control samples required by the SW-846 or CWA methods. The quality control samples include a method blank, a laboratory control sample, and the matrix spike/matrix spike duplicate analysis. If a target parameter is outside the method limits, every sample that is effected is flagged with the appropriate qualifier in Appendix B of the analytic report.

Method Blank - an aliquot of reagent water carried through the entire analytic process. The method blank results indicate if any possible contamination exposure during the sample handling, digestion or extraction process, and analysis. Concentrations of target analytes above the reporting limit in the method blank are qualified with the "B" qualifier.

Laboratory Control Sample - is a sample of known concentration that is carried through the digestion/extraction and analysis process. The percent recovery, expressed as a percentage of the theoretical concentration, has statistical control limits indicating that the analytic process is "in control". If a target analyte is outside the control limits for the laboratory control sample or any other control sample, the parameter is flagged with a "J4" qualifier for all effected samples.

Matrix Spike and Matrix Spike Duplicate — is two aliquots of an environmental sample that is spiked with known concentrations of target analytes. The percent recovery of the target analytes also has statistical control limits. If any recoveries that are outside the method control limits, the sample that was selected for matrix spike/matrix spike duplicate analysis is flagged with either a "J5" or a "J6". The relative percent difference (%RPD) between the matrix spike and the matrix spike duplicate recoveries is all calculated. If the RPD is above the method limit, the effected samples are flagged with a "J3" qualifier.

State Stat	Company Name/Address	Alter	Alternate Billing		-	Analysis/	Analysis/Container/Preservative	eservative		7
County Road 3100 Energy Inc.	·		1		13.3		100 A	A STATE OF THE STA	Ţ.	Pageof
County Road 3100 Prepared by Property Road Pr	XTO Energy, Inc.	XTO	RNM031810	· ග					A138	
Ec. NM 87410 Proportion Properties are second se	382 County Road 3100				wy. T kanana		9 - 10		Prepared by:	
Secretary Secr	Aztec, NM 87410								<u> </u>	
### JOSE Lebanon F ### Jose Home (S15)756- ### Jose Home Home (S15)756- ### Jose Home Home (S15)756- ### Jose Home Home Home (S15)756- ### Jose Home Home Home Home (S15)756- ### Jose Home Home Home Home (S15)756- ### Jose Home Home Home Home Home Home Home Hom		· <u>-</u>						100	Science corp	SNTAL
E-colar to, larger,		Report	to: James McDanie			13			12065 Lebanon	Road
Colored Colo		E-mail	to: James_McDani	el@xtoenergy.com	<u> </u>				Mt. Juliet TN 37	122
Following Control Co	K			City/State Collected:	2 Σ	20			Phone (615)758	3-5858
Coccide Simple Park Coccide Park		No.	Lab Proje		[2 	h-,			Phone (800) 76	67-5859
Studie Light S.	. !	1	-		ירלי:	/ (58-5859
		16		١	•//\ 	SIO				(lab use only)
Next Day	Rush?	P P			و ا	S.			XTORNM	
Two Day	11111	Next Day100	%		000	10:			Template/Prelogin	
miple ID Comp(Gish Matrix Depth Date Time Only & S S (448.5048) She posite (exp SS - P/H/lo SS		Two Day50		Yes	? <i>}></i>	y9				
Sample D Compicate Marrix Depth Date Time Cons Marrix Depth Date Time Constitution Pfright SSC 1 Marrix L485048 L48504	X	Three Day25		Ш	<u> </u>] N [0		1/3 5/3	Shipped Via: Fed Ex	
Solite Comp SS - P/H/Io IS3C X X L485048 L	ample ID	Matrix		Time	rts LSI	N N			Remarks/contaminant	Sample # (lab only)
GW.Groundwater Ww.Wastewater DW-Drinking Water OT-Other	ST COMPOSITE	58		_	<u>×</u> -	$\frac{x}{x}$	_		8405847	10-8405857
GW-Groundwater Ww-Wastewater DW-Drinking Water OT-Other						10 A				
GW-Groundwater WW-Wastewater DW-Drinking Water OT-Other GW-Groundwater WW-Wastewater DW-Drinking Water OT-Other Date: Time: Received by (Signature)						10 mg				
GW-Groundwater Ww-Wastewater DW-Drinking Water OT-Other GW-Groundwater Ww-Wastewater DW-Drinking Water OT-Other Date Time: Received by: (Signature)						2 Std. 22				
GW-Groundwater Ww-Wastewater DW-Drinking Water OT-Other										
GW-Groundwater WW-Wastewater DW-Drinking Water OT- Other										
GW-Groundwater Ww-Wastewater DW-Drinking Water OT-Other								(Take)		
GW-Groundwater WW-Wastewater DW-Drinking Water OT-Other						20				
GW-Groundwater WW-Wastewater DW-Drinking Water OT-Other										
Date: Time: Received by: (Signature) Date: Time: Received by: (Signature)	Matrix: SS-Soil/Solid GW-Groundwater WW-W	astewater DW-Drin	tking Water OT	- Other				품	Тетр	1
Date: Time: Received by: (Signature) Samples returned via. FodEx.X. UPS_Other_Condition ### 1902 C 32 Date: Time: Received by: (Signature)	Remarks: 7 /							Flow	Other	
Date: Time: Received by: (Signature) Date: Time: Received for lab py: (Signature) M. M. A.	by Stignardire		ed by:(Signature)	Z.	Samp	les retumed	via: FedEx X	UPS_Other		ouse only)
Date: Time: Received for lap p_i (Signature) M Date: Time: Date p_i Date: NOF: p_i Date: p_i D				1	Temp	10		ss Received:		
この場合は、人間では、一部では、一部では、人間には、一人のは、一般には、一人のなどは、一人のなどは、一人のなどは、一人のなどは、一人のなどは、一人のなどは、一人のなどは、一人のなどは、一人のなどは、			lab py (Sign	on Market	Date:	1.00	7. 3046	00,18		.
						·				



James McDaniel /FAR/CTOC

10/20/2010 04:32 PM

To brandon.powell@state.nm.us

cc bcc

Subject Blackhills 25-2 BGT Closure

Brandon,

Please accept this email as the required 72 hour notice for closure activities at the Blackhills 25-2 well site (API # 30-045-31607) located in Unit O, Section 25, Township 26N, Range 13W, San Juan County, New Mexico. This well site is being plugged and abandoned, and therefore the below grade tank will no longer be used.





October 20, 2010

Mark Kelly,
Bureau of Land Management – Farmington Field Office
1235 La Plata Highway
Farmington, New Mexico, 87401

Re: Blackhills 25-2

Unit O, Section 25, Township 26N, Range 13W, San Juan County, New Mexico

Dear Mr. Kelly,

This submittal is pursuant to Rule 19.15.17.13 requiring operators to notify surface owners of the closure of a below grade tank pit. XTO Energy, Inc. (XTO) is hereby providing written documentation of our proposal to close the below grade tank pit associated with the above mentioned well site by waste excavation and removal.

Should you have questions or require additional information, please feel free to contact me at your convenience at (505) 333-3100. Thank you for your time in regards to this matter.

Respectfully Submitted,

James McDaniel EH&S Specialist XTO Energy, Inc. San Juan Division

SENDER: COMPLETE THIS SECTI Complete items 1, 2, and 3. Also of item 4 if Restricted Delivery is des Print your name and address on the so that we can return the card to the back of the or on the front if space permits. Article Addressed to: BLM-FFO Mark Kelly	complete ired. ne reverse you.	A. Signature	☐ Agent ☐ Addressee Date of Delivery
1235 La Plata H Farmington, NM	10401 87401	3. Service Type Certified Mail Registered Return Receipt Co.D. Restricted Delivery? (Extra Fee)	for Merchandise
Article Number (Transfer from service label) PS Form 3811, February 2004	7009 2250 Domestic Ref	0001 1303 5033	102595-02-M-1540

m m	U.S. Posial Service MAIL. RECEIPT CERTIFIED MAIL. RECEIPT (Pomeste Mail Only: No Insurance Coverage Provided)
5.0	For delivery information visit our website at www.uspecomp
m	OFFICIAL USE
ספת תססס ספפ	Postage \$ Certified Fee Return Receipt Fee (Endorsement Required) Restricted Delivery Fee (Endorsement Required) Total Postage & Fees \$
2 600	Sent To-FFO Harry Kelly Street, Apt. No.; 1235 La Plata towy
r-,	or PO Box No. 1233 CAL PLOTAL TOWY Gibt, State, ZIP+4 TOU MUNATON, NU 87401 IPS From \$600, 200441 8006 State Revenue for Instructions

.

XTO Energy, Inc. Blackhills 25 #2 Section 25, Township 27N, Range 13W Closure Date 10/25/2010

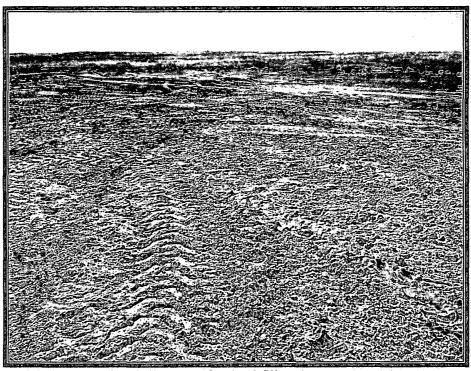


Photo 1: Blackhills 25-2 after backfill and Recontour (view 1)

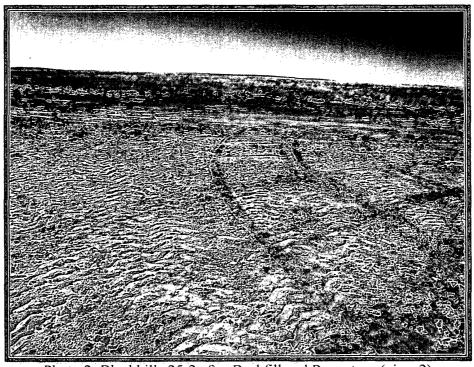


Photo 2: Blackhills 25-2 after Backfill and Recontour (view 2)