

UNITED STATES
DEPARTMENT OF THE INTERIOR
BUREAU OF LAND MANAGEMENT

FORM APPROVED
OMB No. 1004-0135
Expires: January 31, 2004

SUNDRY NOTICES AND REPORTS ON WELLS
Do not use this form for proposals to drill or to re-enter an abandoned well. Use Form 3160-3 (APD) for such proposals.

RECEIVED
2001 JAN 12 PM 12:00
070 Farmington, NM

SUBMIT IN TRIPLICATE - Other Instructions on reverse side

1. Type of Well
☐ Oil Well ☐ Gas Well ☒ Other

2. Name of Operator
Benson-Montin-Greer Drilling Corp.

3a. Address
4900 College Boulevard, Farmington, NM 87402

3b. Phone No. (include area code)
505-325-8874

4. Location of Well (Footage, Sec., T, R., M., or Survey Description)
1980' FNL, 660' FWL, Section 19, Township 27 North, Range 1 East

5. Lease Serial No.

Jicarilla Contract 237

6. If Indian, Allottee or Tribe Name

Jicarilla Apache

7. If Unit or CA/Agreement, Name and/or No.
NM78389K

8. Well Name and No.

EPCMU #40 (E-19)

9. API Well No.

30-039-22592

10. Field and Pool, or Exploratory Area

Puerto Chiquito Mancos, East

11. County or Parish, State

Rio Arriba, New Mexico

12. CHECK APPROPRIATE BOX(ES) TO INDICATE NATURE OF NOTICE, REPORT, OR OTHER DATA

TYPE OF SUBMISSION	TYPE OF ACTION			
<input type="checkbox"/> Notice of Intent	<input type="checkbox"/> Acidize	<input type="checkbox"/> Deepen	<input type="checkbox"/> Production (Start/Resume)	<input type="checkbox"/> Water Shut-Off
<input checked="" type="checkbox"/> Subsequent Report	<input type="checkbox"/> Alter Casing	<input type="checkbox"/> Fracture Treat	<input type="checkbox"/> Reclamation	<input type="checkbox"/> Well Integrity
<input type="checkbox"/> Final Abandonment Notice	<input type="checkbox"/> Casing Repair	<input type="checkbox"/> New Construction	<input type="checkbox"/> Recomplete	<input type="checkbox"/> Other
	<input type="checkbox"/> Change Plans	<input type="checkbox"/> Plug and Abandon	<input type="checkbox"/> Temporarily Abandon	
	<input checked="" type="checkbox"/> Convert to Injection	<input type="checkbox"/> Plug Back	<input type="checkbox"/> Water Disposal	

3. Describe Proposed or Completed Operation (clearly state all pertinent details, including estimated starting date of any proposed work and approximate duration thereof. If the proposal is to deepen directionally or recompleat horizontally, give subsurface locations and measured and true vertical depths of all pertinent markers and zones. Attach the Bond under which the work will be performed or provide the Bond No. on file with BLM/BIA. Required subsequent reports shall be filed within 30 days following completion of the involved operations. If the operation results in a multiple completion or recompleat in a new interval, a Form 3160-4 shall be filed once testing has been completed. Final Abandonment Notices shall be filed only after all requirements, including reclamation, have been completed, and the operator has determined that the site is ready for final inspection.)

1. Perforate Mancos 3260' to 3300', 3328' to 3370', 80 holes.
2. Swab test perfs 4075' to 4186', recovered 100% water. Swab test perfs 3260' to 3370', recovered 100% water.
3. Set cement retainer at 3410', cement squeeze perfs 4075' to 4186' with 125 sacks regular cement to 1000 psi.
4. Set Uni-pkr V1 at 3187' with 98 joints 2-3/8" EUE 8rd tubing.
5. Load tubing, establish injection rate of 2.3 BPM at 200 psi. Load annulus with packer fluid, pressure test to 500 psi, waiting on MIT verification.



RECEIVED
BLM
04 JAN 14 PM 2:05
010 ALBUQUERQUE, N.M.

14. I hereby certify that the foregoing is true and correct
Name (Printed/Typed)

Steve Owen

Title Engineer

Signature

Steve Owen

Date 1/9/2004

THIS SPACE FOR FEDERAL OR STATE OFFICE USE

Approved by (Signature/s) Adam M. Salameh

Name
(Printed/Typed)

Division of Multi-Resources

Conditions of approval, if any, are attached. Approval of this notice does not warrant or certify that the applicant holds legal or equitable title to those rights in the subject lease which would entitle the applicant to conduct operations thereon.


Office

Date

FEB 18 2004

Title 18 U.S.C. Section 1001 and Title 43 U.S.C. Section 1212, make it a crime for any person knowingly and willfully to make to any department or agency of the United States any false, fictitious or fraudulent statements or representations as to any matter within its jurisdiction.

(Continued on next page)

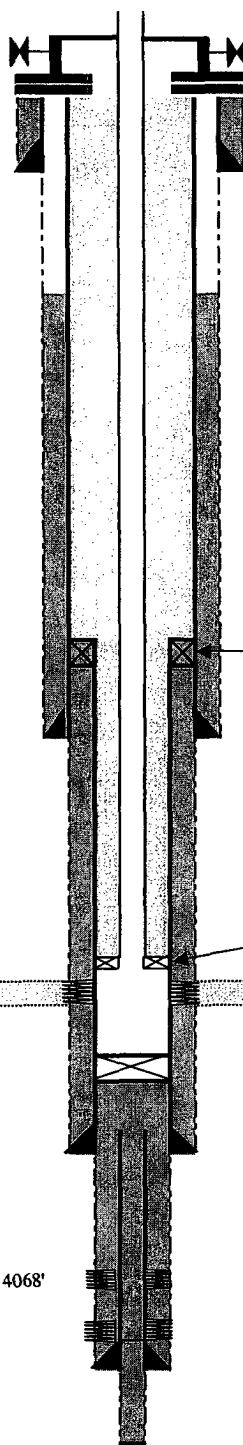

Spud: 4/10/81

B-M-G DRILLING CORP., INC.
EPCMU #40 (E-19) API #30-039-22592
1980 FNL-660 FWL, SEC 19 T27N-R1E

15" hole, 10 3/4" 45# (H-40?) csg @ 121' w/ 120 sx cmt

GL = 7115 ft.

RKB = 7123 ft.

All depths referenced to KB unless otherwise noted

TOC est @ 800' (75% fill)

Cum. Oil:

Cum. Gas:

Cum. Water:

Logs: Induction-Gamma Ray, Temperature Survey, Induction-Electrical

TIW type THL liner hanger @ 2210'

8 3/4" hole to 2553', 7" 23# K-55 csg @ 2553' w/ 300 sx cmt

surfaced 20 bbls oil while running and cementing 4 1/2" liner

Uni-pkr VI @ 3187', 10,000 # tension

Niobrara "A" & "B" 3260-3370

Perf 3260-3300, 3328-3370, 80 holes total-6/23/94

acidized w/ 1500 gal 15% HCL, pumped 100% water after load recovery

PBTD 34104' with 125 sks cement, squeeze to 1000 psi

TOC 3541'

6 1/4" hole to 3621', 4 1/2" 10.5# K-55 liner @ 3620' (top @ 2210) w/ 160 sx cmt

Greenhorn 4068'

Perf 4075'-4125' acidized w/ 3000 gal 15% HCL, AIP-1200#, AIR-1.5 BPM 8/6/81

Perf 4152-4186 PBTD 4200'

3 7/8" hole to 4297', 3 1/2" 7.7# J-55 liner @ 4297' (top @ 3541) w/ 25 sx cmt

HPW in open hole, swbd-unable to lower fluid level

2 7/8" hole to TD 4346'

sdo 1/08/03