

Form 9-231
(May 1963)UNITED STATES
DEPARTMENT OF THE INTERIOR
GEOLOGICAL SURVEYSUBMIT IN TRIPLICATE
(Other instructions on reverse side)Form 9-231
Submittal No. 42-1112

5. LEASE DESIGNATION AND SERIAL NO.

SF-078272

6. IF INDIAN, ALLOTTEE OR TOMB NAME

SUNDRY NOTICES AND REPORTS ON WELLS

(Do not use this form for proposals to drill or to deepen or plug back to a different formation.
See "APPLICATION FOR PERMIT" for such proposals.)

1.

OIL WELL ☒ GAS WELL ☐ OTHER

2. NAME OF OPERATOR

BCO, Inc.

3. ADDRESS OF OPERATOR

135 Grant Ave. Santa Fe, New Mexico 87501

4. LOCATION OF WELL (Report location clearly and in accordance with any State requirements.
See also space 17 below.)
At surface

990' FNL 2240' FEL Sec. 3 T23N R7W

7. UNIT AGREEMENT NAME

8. FARM OR LEASE NAME

Dunn

9. WELL NO.

9

10. FIELD AND FORM. OF WILDCAT
Lybrook Gallup & Undesignated Graneros

11. SEC., T., R., M. OR BLM. AND SURVEY OR AREA

Sec 3 T23N R7W

14. PERMIT NO.

15. ELEVATIONS (Show whether Dr., RT, CR, etc.)

GR 6922

12. COGNITIVE PARISH 13. STATE

Rio Arriba N.M.

16.

Check Appropriate Box To Indicate Nature of Notice, Report, or Other Data

NOTICE OF INTENTION TO:

TEST WATER SHUT-OFF

PULL OR ALTER CASING

FRACTURE TREAT

MULTIPLE COMPLETE

SHOOT OR ACIDIZE

ABANDON*

REPAIR WELL

CHANGE PLANS

(Other)

SUBSEQUENT REPORT OF:

WATER SHUT-OFF

FRACTURE TREATMENT

SHOOTING OR ACIDIZING

(Other) Drilling Progress

REPAIRING WELL

ALTERING CASING

ABANDONMENT

XX


(Note: Report results of multiple completion on Well Completion or Recompletion Report and Log form.)

17. DESCRIBE PROPOSED OR COMPLETED OPERATIONS (Clearly state all pertinent details, and give pertinent dates, including estimated date of starting and proposed work. If well is directionally drilled, give subsurface locations and measured and true vertical depths for all markers and pertinent to this work.)

5-10-82 Notified Earl Becher at 9:40 A.M. with Minerals Management Service that we intend to cement surface pipe on this well between 2:00 and 6:00 P.M. on 5-10-82.

Drilled 12 1/4" hole and ran 294' 24# 8 5/8" K-55 surface pipe. Landed pipe at 294'. Cemented with 200 sacks Class B 3% CaCl cement, with 1/4# floccell per sack. Circulated 10 barrels cement. Plug down 12:15 A.M. 5-11-82.

5-11-82 Drilled out surface at 10:00 A.M.

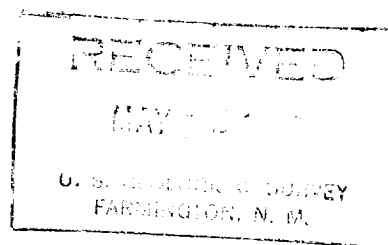

18. I hereby certify that the foregoing is true and correct

SIGNED

Harry R. Becher

TITLE

President

DATE 5/11/82

(This space for Federal or State office use)

APPROVED BY

CONDITIONS OF APPROVAL, IF ANY:

TITLE

NMOCC

DATE

5mm