

RECEIVED  
MAIL ROOM

27 OCT 26 AM 11:10

FARMINGTON RESOURCE AREA  
FARMINGTON, NEW MEXICO

October 23, 1987

United States Department of the Interior  
Bureau of Land Management  
Caller Service 4104  
Farmington, New Mexico 87499  
Attention: Mr. Steve Mason

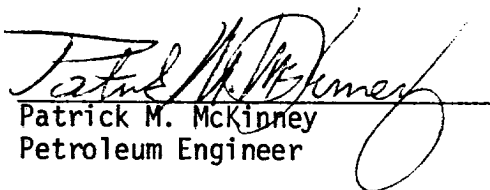
RE: Notice of Subsequent Abandonment  
#1 Federal 24-11 (Sec. 11-T20N-R3W)  
Rio Puerco Field  
Sandoval County, New Mexico

Dear Mr. Mason:

Attached please find five copies of Form 3160-5, "Notice of Subsequent Abandonment" for the subject well.

Please return the excess copies to the undersigned and advise should you require any further details.

Respectfully,

  
Patrick M. McKinney  
Petroleum Engineer

PMM: drp

bcc: S. Siegwein

cc: Well File

RECEIVED  
OCT 29 1987  
OIL CON. DIV.  
DIST. 3

UNITED STATES  
DEPARTMENT OF THE INTERIOR  
BUREAU OF LAND MANAGEMENT

SUBMIT IN TRIPLICATE  
(Other instructions on re-  
verse side)

Form approved.  
Budget Bureau No. 1004-0135  
Expires August 31, 1985

SUNDRY NOTICES AND REPORTS ON WELLS

(Do not use this form for proposals to drill or to deepen or plug back to a different reservoir.  
Use "APPLICATION FOR PERMIT" for such proposals.)

1. OIL WELL <input checked="" type="checkbox"/> GAS WELL <input type="checkbox"/> OTHER <input type="checkbox"/>		5. LEASE DESIGNATION AND SERIAL NO. NM 39532	
2. NAME OF OPERATOR Champlin Petroleum Company (Union Pacific Resources)		6. IF INDIAN, ALLOTTEE OR TRIBE NAME	
3. ADDRESS OF OPERATOR 420 Henry Ford Ave., Wilmington, California 90748		7. UNIT AGREEMENT NAME	
4. LOCATION OF WELL (Report location clearly and in accordance with any State requirements. See also space 17 below.) At surface  SE SW (930' FSL and 1980' FWL)		8. FARM OR LEASE NAME Federal 24-11	
14. PERMIT NO. Approved 2/16/84		9. WELL NO. #1	
15. ELEVATIONS (Show whether SP, ST, CR, etc.) 6866' FL		10. FIELD AND POOL, OR WILDCAT Rio Puerco Mancos-Gallup	
		11. SEC. T. R. M. OR BLK. AND SURVEY OR AREA Sec. 11-T20N-R3W	
		12. COUNTY OR PARISH Sandoval	13. STATE NM

16. Check Appropriate Box To Indicate Nature of Notice, Report, or Other Data

NOTICE OF INTENTION TO:

TEST WATER SHUT-OFF ☐  
FRACTURE TREAT ☐  
SHOOT OR ACIDIZE ☐  
REPAIR WELL ☐  
(Other) ☐

PCLL OR ALTER CASING ☐  
MULTIPLE COMPLETE ☐  
ABANDON ☐  
CHANGE PLANS ☐

SUBSEQUENT REPORT OF:

WATER SHUT-OFF ☐  
FRACTURE TREATMENT ☐  
SHOOTING OR ACIDIZING ☐  
(Other) ☐

REPAIRING WELL ☐  
ALTERING CASING ☐  
ABANDONMENT ☒

(NOTE: Report results of multiple completion on Well Completion or Recompletion Report and Log form.)

17. DESCRIBE PROPOSED OR COMPLETED OPERATIONS (Clearly state all pertinent details, and give pertinent dates, including estimated date of starting any proposed work. If well is directionally drilled, give subsurface locations and measured and true vertical depths for all markers and zones pertinent to this work.)

REPORT OF SUBSEQUENT ABANDONMENT

10-9-87 thru 10-14-87 Plug #1: Set CIBP at 4140' (perf's at 4180'). Spot a 72' lineal plug from 4140' to 4068' w/6 cf (5 sxs) of Class "B" cement. Reverse hole with 9.2 ppg claybase mud. Cut and retrieve 2527' of 4-1/2" csg.

10-15-87 Plug #2: Spot a 133' lineal plug across 4-1/2" csg stub from 2527' to 2394' with 30 cf (25 sxs) of Class "B" cement.

Plug #3: Spot a 133' lineal plug across Mesaverde Formation from 2247' to 2114' with 30 cf (25 sxs) of Class "B" cement.

Plug #4: Spot a 133' lineal plug across Chacra Formation from 1367' to 1234' with 30 cf (25 sxs) of Class "B" cement

Plug #5: Spot a 133' lineal plug across Pictured Cliffs Formation from 944' to 811' with 30 cf (26 sxs) of Class "B" cement.

Plug #6: Spot a 339' lineal plug across the Fruitland and Ojo Alamo Formations as well as the 9-5/8" csg shoe w/71 cf (60 sxs) of Class "B" cement.

(OVER)

18. I hereby certify that the foregoing is true and correct

SIGNED P. M. McKinney  
(This space for Federal or State office use)

TITLE Petroleum Engineer

DATE 10/23/87

APPROVED BY \_\_\_\_\_  
CONDITIONS OF APPROVAL, IF ANY:

APPROVED BY \_\_\_\_\_  
LISTING \_\_\_\_\_  
OIL CON. DIV. DIST. 3

DATE OCT 28 1987

\*See Instructions on Reverse Side  
NMOC

10-16-87

Plug #7: Spot a 68' lineal surface plug with 12 cf (10 sxs) of Class "B" cement. Cut csg 5' below GL and install steel plate and dry hole marker.