

UNITED STATES
DEPARTMENT OF THE INTERIOR
GEOLOGICAL SURVEY

SUNDRY NOTICES AND REPORTS ON WELLS


(Do not use this form for proposals to drill or to deepen or plug back to a different reservoir. Use Form 9-331-C for such proposals.)

1. oil well ☐ gas well ☒ other ☐
2. NAME OF OPERATOR
Petro Lewis Corporation
3. ADDRESS OF OPERATOR P. O. Box 2250
717 17th Street, Denver, CO 80201
4. LOCATION OF WELL (REPORT LOCATION CLEARLY. See space 17 below.)
AT SURFACE: 1990' FNL & 1100' FEL (SENE)
AT TOP PROD. INTERVAL: Same
AT TOTAL DEPTH: Same
16. CHECK APPROPRIATE BOX TO INDICATE NATURE OF NOTICE, REPORT, OR OTHER DATA

5. LEASE
SF-080566
6. IF INDIAN, ALLOTTEE OR TRIBE NAME
7. UNIT AGREEMENT NAME
8. FARM OR LEASE NAME
Ruddock
9. WELL NO.
7A
10. FIELD OR WILDCAT NAME
Blanco Mesaverde
11. SEC., T., R., M. OR BLK. AND SURVEY OR AREA
Section 3, T. 25N, R. 3W
12. COUNTY OR PARISH
Rio Arriba
13. STATE
New Mexico
14. API NO.
30-039-2283
15. ELEVATIONS (SHOW DF, KDB, AND WD)
7447' GR, 7459' KDB

REQUEST FOR APPROVAL TO: SUBSEQUENT REPORT OF:

TEST WATER SHUT-OFF ☐
FRACTURE TREAT ☐
SHOOT OR ACIDIZE ☐
REPAIR WELL ☐
PULL OR ALTER CASING ☐
MULTIPLE COMPLETE ☐
CHANGE ZONES ☐
ABANDON* ☐
(other) Production Casing

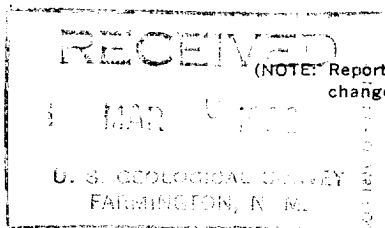

17. DESCRIBE PROPOSED OR COMPLETED OPERATIONS (Clearly state all pertinent details, and give pertinent dates, including estimated date of starting any proposed work. If well is directionally drilled, give subsurface locations and measured and true vertical depths for all markers and zones pertinent to this work.)*

10-24-81: Reached TD of 6300 feet.

10-25-81: Ran open hole logs with Schlumberger; ran production casing as follows: 148 jts. 4-1/2" K-55 10.5# STC casing tallying 6322 feet and set at 6300 feet. Used Dwyer 11" to cement casing with 1025 sx in two stages.

First Stage pumped 275 sx lite cement with 10# gils per sx, followed by 200 sx Class B.
Second Stage DV tool at 4504 feet, pumped 400 sx lite cement with 10# gils per sx followed by 150 sx Class B cement with 12% CaCl₂. Lost circulation on second stage; top of cement at 3080 feet. All depth 6300 ft.

Subsurface Safety Valve: Manu. and Type _____

18. I hereby certify that the foregoing is true and correct

SIGNED Joe Elledge TITLE Agent DATE March 5 1982

(This space for Federal or State office use)

APPROVED BY _____ TITLE _____ DATE _____
CONDITIONS OF APPROVAL, IF ANY:

*See Instructions on Reverse Side

NMOCC

MAR 15 1982

FARMINGTON DISTRICT

BY Snn