UNITED STATES

DEPARTMENT OF THE INTERIOR

FORM APPROVED OMB NO. 1004-0136 Expires February 28, 1995

	BUREAU OF LAN	D MANAGEMENT		EASE DESIGNATION AND SERIAL NO.
APPLICAT	ION FOR PERM	IT TO DRILL OR DEE	PFN Co	nt 147
a TYPE OF WORK			6. ÎF	INDIAN, ALLOTTEE OR TRIBE NAME
DRILL	∑ 1	DEEPEN 🗍		arilla Apache
٧.		ALL! ZIV	7. UI	NIT AGREEMENT NAME
OIL WELL GAS WELL S	▽	∇	\Box Ax	II Apache J
OIL WELL GAS WELL	OTHER	SINGLE ZONE MUL	TIPLE ZONE 8. FA	ARM OR LEASE NAME WELL NO.
NAME OF OPERATOR			231	
ADDRESS AND TELEPHONE NO	oco Inc.			I WELL NO
	Desta Drive Suite 649	W, Midland, TX 79705; 915/6	586 5515	30-034-2649
LOCATION OF WELL (Report location			10.5	IELD AND POOL, OR WILDCAT
At surface 660' FNL & 19		7732125	26 Me	saverde
At proposed prod. Zone			ILS	EC., T., R., M., OR BLK
660' FNL & 19	975' FWL	JUL 2		ND SURVEY OR AREA
DISTANCE IN MILES AND DIRECT	TION FROM NEAREST TOWN OF	R POST OFFICE*		8, T25N, R5W OUNTY OR PARISH 13. STATE
		GLEYN	Rio	
OUSTANCE FROM PROPOSED* LOCATION TO NEAREST		6. NO. OF ACRAS IN LEASE	C 17 NO OF AC	RES ASSIGNED
PROPERTY OR LEASE LINE, FT (Also to nearest drlg. Unit line, if any)		640.45=	TO THIS V	WELL W/320
DISTANCE FROM PROPOSED LOC	CATION*	9. PROPOSED DEPTH	20 ROTARY C	OR CABLE TOOLS
TO NEAREST WELL, DRILLING, C OR APPLIED FOR, ON THIS LEAS	E, FT	5418 -5718-		Rotary
ELEVATIONS (Show whether DF,	RT, GR, etc.) 6722'	<u> </u>	22.API	PROX. DATE WORK WILL START*
		SED CASING AND COMEN	ED (C DD C C D	6/1/00
SIZE OF HOLE	GRADE, SIZE OF CASI	SED CASING AND CEMEN		
12-1/4"	J-55; 9-5/8" or 8-5/		SETTING DEPTH	QUANTITY OF CEMENT
8-3/4" or 7-7/8"	J-55; 4-1/2"	10.5#	320+/- 5418'	238 sxs, circ.
***		10.511	3410	1455 sxs, circ.
 Well Location & Acr Proposed Well Plan (3) Cementing Plan. Blowout Preventer Homes Surface Use Plan. Production Facility L 	reage Dedication Plat (Dutline. ookup. ayout.	id.		The well will be OO MAY 1900 THE WELL WILL BURN M.
ABOVE SPACE DESCRIBE	THE PROPERTY OF THE PROPERTY O	to an subsurface leasting to the time of	red and true vertical denti	and proposed new productive zone. If is. Give blowout preventer program, if a
ABOVE SPACE DESCRIBE	ectionally, give pertinent da	ita off substittace locations and measu	and the vertical depti	program, it a
ABOVE SPACE DESCRIBE	Johnson	TITLE Sr. Property Analyst		DATE <u>5/15/00</u>
ABOVE SPACE DESCRIBE oposal is to drill or deepen directly and the space for Federal or PERMIT NO.	State office Use)	TITLE Sr. Property Analyst	DOVAL DATE	DATE <u>5/15/00</u>
ABOVE SPACE DESCRIBE posal is to drill or deepen directly and the second	State office Use)	TITLE Sr. Property Analyst	DOVAL DATE	
ABOVE SPACE DESCRIBE oposal is to drill or deepen directly and the space for Federal or PERMIT NO.	State office Use)	TITLE Sr. Property Analyst APPlotds legal or equitable title to those rights in the	ROVAL DATE ne subject lease which would en	DATE 5/15/00 ntitle the applicant to conduct operations theron.
ABOVE SPACE DESCRIBE posal is to drill or deepen directly and the SIGNED ABOUT (This space for Federal or PERMIT NO. Application approval does not warr	Any: And the applicant he	TITLE Sr. Property Analyst APPloids legal or equitable title to those rights in the	ROVAL DATE The subject lease which would en Auda Market	DATE <u>5/15/00</u>

District I FJ 80x 1980, Hobbs, NM 88241-1980

District II PO Drawer DD, Artesia, NM 88211-0719

District III 1000 Rio Brazos Rd., Aztec, NM 87410

District IV PO Box 2088, Santa Fe, NM 87504-2088

State of New Mexico Energy, Minerals & Natural Resources Department


Revised February 21, 1994 Instructions on back Submit to Appropriate District Office State Lease - 4 Copies Fee Lease - 3 Copies

OIL CONSERVATION DIVISION PO Box 2088 Santa Fe, NM 87504-2088

AMENDED REPORT

Form C-102

<u></u>			WELL			D A	CREAGE DED	ICATION PL	_AT			
,	'API Number 'Pool Code						³Pool Name					
30.03	1-16	496	>	72319			BLANCO MESAVERDE					
*Property	· ·						/ Name			⁵ We	ell Number	
00313	32				AXI	APA	PACHE J				238	
'OGRID N	No.				*Ope	rator	Name			9 =	levation	
00507	/3											
		CONOCO, INC.							(5722 '		
¹⁰ Surface Location												
UL or lat no.	Sect ion	Township	Range	Lat Idn	n Feet from the		North/South line	Feet from the	East/We	est line	County	
C	8	25N	5W		660		NORTH	1975	WE	WEST AR		
ç <u>.</u>			Bottom	Hole L	ocation	n I	f Different	From Surf	ace	·	1	
UL or lot no.	Section	Township	Plange	Lot Ion	Feet from the		North/South line	Feet from the	East/We	st line	County	
			1									
12 Dedicated Acres		13 Joint or Int	fill 14 Cons	olidation Code	15 Order N				L			
m/ 320.0	0											
NO ALLOWABLE WILL BE ASSIGNED TO THIS COMPLETION UNTIL ALL INTERESTS HAVE BEEN CONSOLIDATED												
[OR A	NON-ST	ANDARD	UNIT HAS	S BE	EN APPROVED I	BY THE DIVI	SION	LIV COIV	SOL IDA I LU	
¹⁵ 5278.68 '					17 OPER			FICATION				

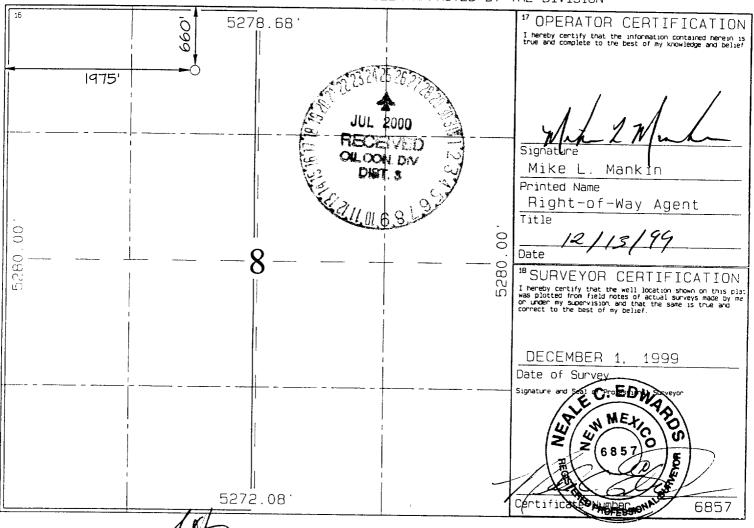

District I 90 Box 1980, Hobbs, NM 88241-1980

District II PO Drawer DD, Artesia, NM 88211-0719

District III 1000 Rio Brazos Ad., Aztec, NM 87410

District IV PO Box 2088, Santa Fe, NM 87504-2088 State of New Mexico Energy, Minerals & Natural Resources Department

OIL CONSERVATION DIVISION PO Box 2088 Santa Fe. NM 87504-2088 Form C-102 Revised February 21, 1994 Instructions on back omit to Appropriate District Office


Submit to Appropriate District Office State Lease - 4 Copies Fee Lease - 3 Copies

AMENDED REPORT


WELL LOCATION AND ACREAGE DEDICATION PLAT

'API Number			*Pool Code		³Pool Name					
30-0.	39-5	2649K	5496 72319 BLANCO MESAVERDI					AVERDE		
*Property	Code		°Property Name						*Well Number	
00313	32		AXI APÁCHE J							
'OGRID 1	VO .		*Operator Name							
00507	'3	CONOCO, INC.							*Elevation 6722	
					¹⁰ Surfac	e Location				
UL or lot no.	Section	Township	Range	Lot Idn	Feet from th	e North/South line	Feet from the	East/West line	County	
С	8	25N	5W		660	NORTH	1975	WEST	RIO ARRIBA	
	¹¹ Bottom Hole Location If Different From Surface								1 AIIIIIEA	
UL or lot no.	Section	Township	Range	Lot Idn	Feet from th	e North/South line	Feet from the	East/West line	County	
12 Dedicated Acres 320.0	0	¹³ Joint or Infi	11 14 Cons	olidation Code	¹⁵ Order No.					

NO ALLOWABLE WILL BE ASSIGNED TO THIS COMPLETION UNTIL ALL INTERESTS HAVE BEEN CONSOLIDATED OR A NON-STANDARD UNIT HAS BEEN APPROVED BY THE DIVISION

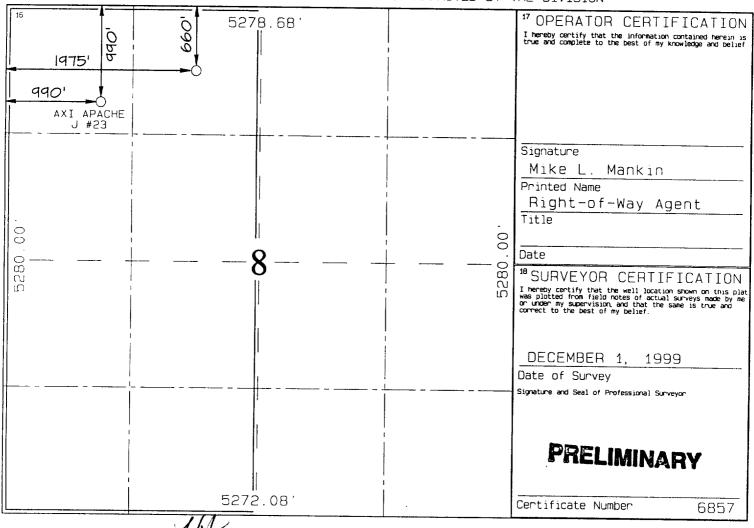

CONOCO, INC. AXI APACHE J #23B 660' FNL & 1975' FWL, SECTION 8, T25N, R5W, N.M.P.M. RIO ARRIBA COUNTY, NEW MEXICO ∕aGas Well ⊂ ×6591

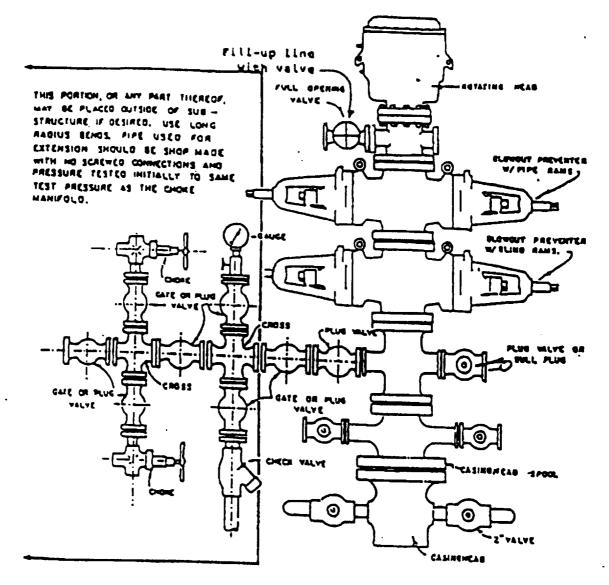

BLOWOUT PREVENTER HOOKUP

Drilling contractors used in the San Juan Basing supply 3000 psi equipment, but cannot provide annular preventors because of substructure limitations. Maximum anticipated surface pressures for this well will not exceed the working pressure of the proposed BOP Please see the attached BOP diagram details 2000 psi equipment according to Onshore Order No. 2 even though the equipment will test to 3000 psi. The 2000 psi system allows deletion of the annular preventor and fulfills your requirements (note diagram No. 1). In addition, the following equipment will comprise the 2000 psi system:

- Two rams with one blind and one pipe ram. 1. 2.
- Kill line (2 inch maximum).
- One kill line valve. 3.
- One choke line valve. 4.
- 5. Two chokes (reference diagram No. 1).
- Upper kelly cock valve with handle. 6.
- 7. Safety valve and subs to fit all drill strings in use. 8.
- Two-inch minimum choke line.
- Pressure gauge on choke manifold. 9. 10.
- Fill-up line above the upper most preventor. 11.
- Rotating head.

Cathodic Protection System Description

Anode Bed Type	Deep Well	
Hole Size	8"	
Hole Depth	200' - 500'	As required to place anodes below moisture and in low resistance strata.
Surface Casing	8° Diam., ≥ 20° Length, Cemented In Annular Space	When needed, casing will be installed at an adequate depth to control ground water flow. Casing will extend a minimum of 2' above grade, be surrounded by a concrete pad, and sealed with a PVC cap. Steel casing will be substituted when boulders are encountered.
Vent Pipe	1" Diam. PVC	Vent pipe will extend from bottom of hole, through top of casing cap, and sealed with a 1" perforated PVC cap.
Type Of Anodes	Cast Iron Or Graphite	
Number Of Anodes	8 - 20	Sufficient quantity to achieve a total anode bed resistance of <1 ohm and a design life ≥ 20 years.
Anode Bed Backfill	Loresco SW Calcined Petroleum Coke Breeze	Installed from bottom of hole to 10' above top anode.
Anode Junction Box	8 - 20 Circuit Fiberglass Or Metal	Sealed to prevent insect & rodent intrusion.
Current Splitter Box	2 - 5 Circuit Metal	Sealed to prevent insect & rodent intrusion.
DC / AC Cable	DC: #2, #4, #6, #8 Stranded Copper (One Size Or Any Combination Of) With High Molecular Weight Polyethylene (HMWPE) Insulation. AC: #8 Stranded Copper HMWPE	18" depth in typical situation, 24" depth in roadway, & 36" depth in arroyo's and streams. EXCEPTION: If trenching is in extremely hard substratum, depth will be 6 - 12" with cable installed in conduit. Installed above foreign pipelines if 1' clearance is available, if not, installed under foreign pipeline with 1' clearance (AC cable always installed under foreign pipeline in conduit).
Power Source	Rectifier Solar Power Unit Thermoelectric Generator	Choice of power source depending on availability of AC & other economic factors.
External Painting	Color to be selected according to BLM specifications.	Paint applied to any surface equipment associated with the CP system which can reasonably be painted.