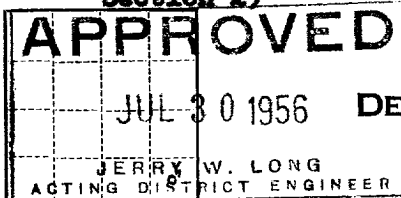


Section 29

(SUBMIT IN TRIPLICATE)

Land Office Santa FeLease No. 079713-BUnit Beamon-FederalUNITED STATES
DEPARTMENT OF THE INTERIOR
GEOLOGICAL SURVEY

SUNDRY NOTICES AND REPORTS ON WELLS

| | | |
|---|---|-------------------------------------|
| NOTICE OF INTENTION TO DRILL..... | SUBSEQUENT REPORT OF WATER SHUT-OFF..... | <input checked="" type="checkbox"/> |
| NOTICE OF INTENTION TO CHANGE PLANS..... | SUBSEQUENT REPORT OF SHOOTING OR ACIDIZING..... | |
| NOTICE OF INTENTION TO TEST WATER SHUT-OFF..... | SUBSEQUENT REPORT OF ALTERING CASING..... | |
| NOTICE OF INTENTION TO RE-DRILL OR REPAIR WELL..... | SUBSEQUENT REPORT OF RE-DRILLING OR REPAIR..... | |
| NOTICE OF INTENTION TO SHOOT OR ACIDIZE..... | SUBSEQUENT REPORT OF ABANDONMENT..... | |
| NOTICE OF INTENTION TO PULL OR ALTER CASING..... | SUPPLEMENTARY WELL HISTORY..... | |
| NOTICE OF INTENTION TO ABANDON WELL..... | | |

(INDICATE ABOVE BY CHECK MARK NATURE OF REPORT, NOTICE, OR OTHER DATA)

July 16, 1956

Beamon-Federal

Well No. 1 is located 660 ft. from S line and 660 ft. from E line of sec. 29SE₁ SE₁ Section 29
($\frac{1}{4}$ Sec. and Sec. No.)24-N
(Twp.)11-W
(Range)N.M. P.M.
(Meridian)Wildcat
(Field)San Juan
(County or Subdivision)New Mexico
(State or Territory)

(EST)

The elevation of the derrick floor above sea level is 6318 ft.

DETAILS OF WORK

(State names of and expected depths to objective sands; show sizes, weights, and lengths of proposed casings; indicate mudding jobs, cementing points, and all other important proposed work)

After setting 7" casing on bottom @ 4400' with 150 sx cement, tested with 1000# for 30 min before and after drilling plug, tested OK, no break.

I understand that this plan of work must receive approval in writing by the Geological Survey before operations may be commenced.

Company Magnolia Petroleum CompanyAddress P. O. Box 633Midland, Texas

By Harve H. Mayfield
HARVE H. MAYFIELD
Title Assistant Division Superintendent