

UNITED STATES
DEPARTMENT OF THE INTERIOR
GEOLOGICAL SURVEY

SUNDRY NOTICES AND REPORTS ON WELLS

(Do not use this form for proposals to drill or to deepen or plug back to a different reservoir. Use Form 9-331-C for such proposals.)

1. oil well ☒ gas well ☐ other ☐

2. NAME OF OPERATOR
Mesa Petroleum Co.

3. ADDRESS OF OPERATOR
1660 Lincoln St. #2800, Denver CO 80264

4. LOCATION OF WELL (REPORT LOCATION CLEARLY. See space 17 below.)
AT SURFACE: 2025' FNL & 1905' FWL
AT TOP PROD. INTERVAL:
AT TOTAL DEPTH:

16. CHECK APPROPRIATE BOX TO INDICATE NATURE OF NOTICE, REPORT, OR OTHER DATA


REQUEST FOR APPROVAL TO:

- TEST WATER SHUT-OFF ☐
FRACTURE TREAT ☐
SHOOT OR ACIDIZE ☐
REPAIR WELL ☐
PULL OR ALTER CASING ☐
MULTIPLE COMPLETE ☐
CHANGE ZONES ☐
ABANDON* ☐

(other) production casing report

SUBSEQUENT REPORT OF:

- ☐
☐
☐
☐
☐
☐
☐
☐
☐
☐

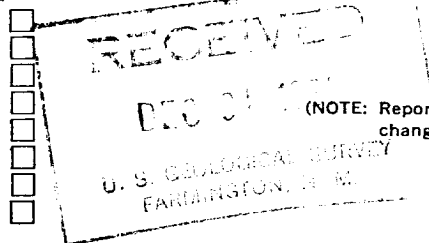

(NOTE: Report results of multiple completion or zone change on Form 9-330.)

5. LEASE
NM 12233

6. IF INDIAN, ALLOTTEE OR TRIBE NAME

7. UNIT AGREEMENT NAME

8. FARM OR LEASE NAME
South Blanco Federal 25

9. WELL NO.
7

10. FIELD OR WILDCAT NAME
Lybrook Gallup Extension

11. SEC., T., R., M., OR BLK. AND SURVEY OR AREA
Sec. 25, T24N, R8W

12. COUNTY OR PARISH
San Juan

13. STATE
NM

14. API NO.

15. ELEVATIONS (SHOW DF, KDB, AND WD)
6897' GR

17. DESCRIBE PROPOSED OR COMPLETED OPERATIONS (Clearly state all pertinent details, and give pertinent dates, including estimated date of starting any proposed work. If well is directionally drilled, give subsurface locations and measured and true vertical depths for all markers and zones pertinent to this work.)*

Subject well drilled to TD of 5720' at 5:15 PM 12/9/81 using a 7" bit. Ran 137 joints new 4½" K-55 10.5#/foot STC production casing and set @ 5700'. Float collar located @ 5660', DV tool @ 3121'. Cemented first stage with 20 barrels viscous preflush, 10 barrels chemical wash, 275 sacks class "B", tailed in with 100 sacks self stress. Cemented second stage with 20 barrels viscous preflush, 10 barrels chemical wash and 400 sacks 65-35 pozmix, tailed in with 50 sacks neat cement. Estimated top of first stage cement @ 3600', estimated top of second stage cement @ 700'.

Subsurface Safety Valve: Manu. and Type _____

Set @ _____

18. I hereby certify that the foregoing is true and correct


SIGNED Randy Nordman TITLE Reg. Coordinator DATE 12/21/81

(This space for Federal or State office use)

APPROVED BY _____ TITLE _____ DATE _____
CONDITIONS OF APPROVAL, IF ANY:

*See Instructions on Reverse Side

NMOCC



ACCEPTED FOR RECORD
JAN 4 1982

FARMINGTON DISTRICT
BY [Signature]