

UNITED STATES
DEPARTMENT OF THE INTERIOR
GEOLOGICAL SURVEY

SUNDRY NOTICES AND REPORTS ON WELLS

(Do not use this form for proposals to drill or to deepen or plug back to a different reservoir. Use Form 9-331-C for such proposals.)

1. oil ☒ well gas ☐ well other ☐

2. NAME OF OPERATOR
Mesa Petroleum Co.

3. ADDRESS OF OPERATOR
1660 Lincoln St. #2800, Denver CO 80264

4. LOCATION OF WELL (REPORT LOCATION CLEARLY. See space 17 below.)
AT SURFACE: 1900' FNL, 1660' FEL
AT TOP PROD. INTERVAL:
AT TOTAL DEPTH:

16. CHECK APPROPRIATE BOX TO INDICATE NATURE OF NOTICE, REPORT, OR OTHER DATA

5. LEASE
NM 12233

6. IF INDIAN, ALLOTTEE OR TRIBE NAME

7. UNIT AGREEMENT NAME

8. FARM OR LEASE NAME
South Blanco Federal 26

9. WELL NO.
7

10. FIELD OR WILDCAT NAME
Lybrook Gallup Extension

11. SEC., T., R., M., OR BLK. AND SURVEY OR AREA
Sec. 26-T24N-R8W

12. COUNTY OR PARISH
San Juan

13. STATE
New Mexico

14. API NO.

15. ELEVATIONS (SHOW DF, KDB, AND WD)
6860' GL

REQUEST FOR APPROVAL TO:

TEST WATER SHUT-OFF ☐

FRACTURE TREAT ☐

SHOOT OR ACIDIZE ☐

REPAIR WELL ☐

PULL OR ALTER CASING ☐

MULTIPLE COMPLETE ☐

CHANGE ZONES ☐

ABANDON* ☐

SUBSEQUENT REPORT OF:

☐

☐

☐



☐

☐

☐

☐

☐

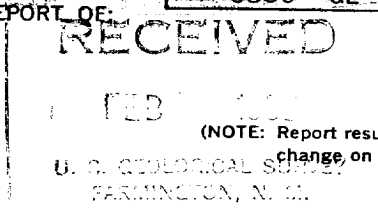

(other) Change ground elevation, clarify surface casing depth, report perforations

17. DESCRIBE PROPOSED OR COMPLETED OPERATIONS (Clearly state all pertinent details, and give pertinent dates, including estimated date of starting any proposed work. If well is directionally drilled, give subsurface locations and measured and true vertical depths for all markers and zones pertinent to this work.)*

On 12/29/81 a Sundry Notice was sent reporting surface casing was set at 225'. This footage is correct. On 1/22/82, a Well Completion Report was sent reporting surface casing was set at 238' KB (Kelly Bushing) which is also correct since ground level to Kelly Bushing is 13'. In future reports, we will try to report this more clearly.

Subject well was perforated between 5463-72' with 1 JSPF and treated with 11,000 gallons X-linked gel with 400 SCF/bbl CO₂, 15,000# 20-40 sand, 5000# 10-20 sand.

Note surface elevation change from 6897' GL to 6860' GL.

Subsurface Safety Valve: Manu. and Type _____ Set @ _____ Ft.

18. I hereby certify that the foregoing is true and correct

SIGNED Randy Norcross TITLE Reg. Coordinator DATE 2/12/82

(This space for Federal or State office use)

APPROVED BY _____ TITLE _____ DATE ACCEPTED FOR RECORD

CONDITIONS OF APPROVAL, IF ANY:

FEB 17 1982

*See Instructions on Reverse Side

NMOCC

FARMINGTON DISTRICT
BY Diane Elliott