


U. S. LAND OFFICE New Mexico
SERIAL NUMBER 014058
LEASE OR PERMIT TO PROSPECT -----

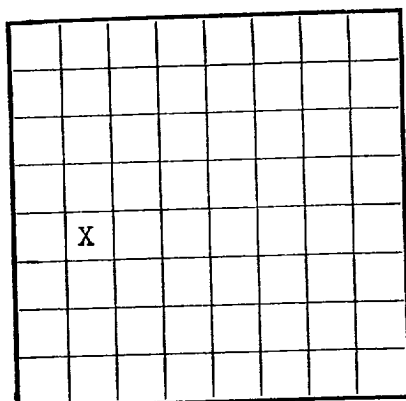

UNITED STATES
DEPARTMENT OF THE INTERIOR
GEOLOGICAL SURVEY

LOG OF OIL OR GAS WELL

LOCATE WELL CORRECTLY

Company J. Glenn Turner Address Box 728 - Farmington, New Mexico

Lessor or Tract Fields Field _____ State New Mexico

Well No. 2-31 Sec. 31 T26N R. 6W Meridian N.M.P.M. County Rio Arriba

Location 2080 ft. [N.] of S Line and 790 ft. [E.] of W Line of Section 31 Elevation 6251
(Derrick floor relative to sea level)

The information given herewith is a complete and correct record of the well and all work done thereon so far as can be determined from all available records.

Signed C. Beeson Neal C. BEESON NEAL

Date March 19, 1957 Title Agent in Farmington

Date _____

The summary on this page is for the condition of the well at above date.

Commenced drilling _____ 1-20 _____, 19 56 Finished drilling _____ 2-13 _____, 19 56

OIL OR GAS SANDS OR ZONES

(Denote gas by G)

(Delete page 17)

No. 1, from 2305 to 2453 (G)	No. 4, from _____ to _____
No. 2, from _____ to _____	No. 5, from _____ to _____
No. 3, from _____ to _____	No. 6, from _____ to _____

IMPORTANT WATER SANDS

No. 1, from _____ to _____

No. 2, from _____ to _____

No. 3, from _____ to _____

No. 4, from _____ to _____

CASING RECORD

CASING RECORD									
Size casing	Weight per foot	Threads per inch	Make	Amount	Kind of shoe	Cut and pulled from	Perforated		Purpose
							From—	To—	
8-5/8"	24#	8 rd. th.	J-55	89'	None				surface
5-1/2"	15.5	"	J-55	2289'	Red Litharox				Long string
1"	10#	"	Neve	2318'	None				Production
H-1051-GL-01-08-05-25-ME17									

MUDDING AND CEMENTING RECORD

Size casing	Where set	Number sacks of cement	Method used	Mud gravity	Amount of mud used
8-5/8"	98	70	Halliburton	Mostly water	
5-1/2"	2313	100	Halliburton	Mostly water	

PLUGS AND ADAPTERS

Heaving plug—Material _____ Length _____ Depth set _____
Adapters—Material _____ Size _____

SHOOTING RECORD

Size	Shell used	Explosive used	Quantity	Date	Depth shot	Depth cleaned out
Solidified Nitro-Glycerin			250 qts.	2/7/56	2327-2433	2453

TOOLS USED

TOOLS USED

Rotary tools were used from 98 feet to 2329 feet, and from _____ feet to _____ feet

Cable tools were used from 0 feet to 98 feet, and from 2329 feet to 2453 feet

Shut in for potential test

DATES

-----, 19----- Put to producing ----- Oct. 6, 1956 -----, 19-----
The production for the first 24 hours was ----- barrels of fluid of which ----- % was oil; ----- %
emulsion; ----- % water; and ----- % sediment. Gravity, °Bé. -----

If gas well, cu. ft. per 24 hours 236,000

Gallons gasoline per 1,000 cu. ft. of gas

Rock pressure, lbs. per sq. in. 866

EMPLOYEES

EMPLOYEES	
_____, Driller	_____, Driller
_____, Driller	_____, Driller

FORMATION RECORD

FORMATION RECORD			
FROM—	TO—	TOTAL FEET	FORMATION
Surface	2270	2270	Surface sand and shale, Ojo Alamo, Kirtland and Fruitland formations.
2270	2280	10	Coal
2280	2305	25	Sand
2305	2453	148	Sand
			Top P.C. 2305

