

APPROVED
 AUG 24 1956
 JERRY W. LONG
 ACTING DISTRICT ENGINEER

(SUBMIT IN TRIPLICATE)

UNITED STATES
 DEPARTMENT OF THE INTERIOR
 GEOLOGICAL SURVEY

Budget Bureau No. 42-B-386.2.
 Approval expires 12-31-55.

Indian Agency Alamogordo Indian
 Contract # 98
 Allottee Alamogordo
 Lease No. Alamogordo

SUNDRY NOTICES AND REPORTS ON WELLS **RECEIVED**

NOTICE OF INTENTION TO DRILL	<input checked="" type="checkbox"/>	SUBSEQUENT REPORT OF WATER SHUT-OFF	<input type="checkbox"/>
NOTICE OF INTENTION TO CHANGE PLANS	<input type="checkbox"/>	SUBSEQUENT REPORT OF SHOOTING OR ACIDIZING	<input type="checkbox"/>
NOTICE OF INTENTION TO TEST WATER SHUT-OFF	<input type="checkbox"/>	SUBSEQUENT REPORT OF ALTERING CASING	<input type="checkbox"/>
NOTICE OF INTENTION TO REDRILL OR REPAIR WELL	<input type="checkbox"/>	SUBSEQUENT REPORT OF REDRILLING OR REPAIR	<input type="checkbox"/>
NOTICE OF INTENTION TO SHOOT OR ACIDIZE	<input type="checkbox"/>	SUBSEQUENT REPORT OF ABANDONMENT	<input type="checkbox"/>
NOTICE OF INTENTION TO PULL OR ALTER CASING	<input type="checkbox"/>	SUPPLEMENTARY WELL HISTORY	<input type="checkbox"/>
NOTICE OF INTENTION TO ABANDON WELL	<input type="checkbox"/>		<input type="checkbox"/>

(INDICATE ABOVE BY CHECK MARK NATURE OF REPORT, NOTICE, OR OTHER DATA)

Well No. Alamogordo 75 is located 970 ft. from N line and 1240 ft. from E line of sec. 29
Section 29 26-N 3-W 11-M.P.M.
 (34 Sec. and Sec. No.) (Twp.) (Range) (Meridian)
Alamogordo San Juan New Mexico
 (Field) (County or Subdivision) (State or Territory)

The elevation of the derrick floor above sea level is 7000 ft.

DETAILS OF WORK

(State names of and expected depths to objective sands; show sizes, weights, and lengths of proposed casings; indicate mudding jobs, cementing points, and all other important proposed work)

We propose to drill the above well to a total depth of approximately 6000' with Rotary Tools. We expect to test the following sand at the following approximate depths:

Alamogordo Alamogordo
San Juan 6000'

We expect to test any other sand that appears productive of oil or gas. CASING PROGRAM: Approx. 300-350' of 8-1/2" casing w/ approx. 250 lb cement. Approx. 400' of 5-1/2" casing w/ 150 lb cement & to be cemented on bottom. We propose to perforate productive zones in the San Juan and Alamogordo sands. Approx. 10,000 gal. water using 10 sand per gal. water at injection rate not less than 10 min. per minute.

I understand that this plan of work must receive approval in writing by the Geological Survey before operations may be commenced.


Company Alamogordo Petroleum Company

Address P.O. Box 623

Alamogordo, N.M.

By H. T. Gorman
H. T. GORMAN,

Title Division Superintendent





NEW MEXICO
OIL CONSERVATION COMMISSION

RECEIVED

AUG 24 1956

U. S. GEOLOGICAL SURVEY
Form C-126
BARTHOLOMEW, NEW MEXICO

Well Location and/or Gas Proration Plat

Date August 21, 1956

Operator Magnolia Petroleum Company Lease Utrilla "B"


Well No. Two (2) Section 19 Township 25 N Range 3 W NMPM

Located 240 Feet From North Line, 1190 Feet From East Line,

Rio Arriba County, New Mexico. G. L. Elevation 7016

Name of Producing Formation Mesa Verde Extension of Pool Blanco Dedicated Acreage 320

(Note: All distances must be from outer boundaries of Section)

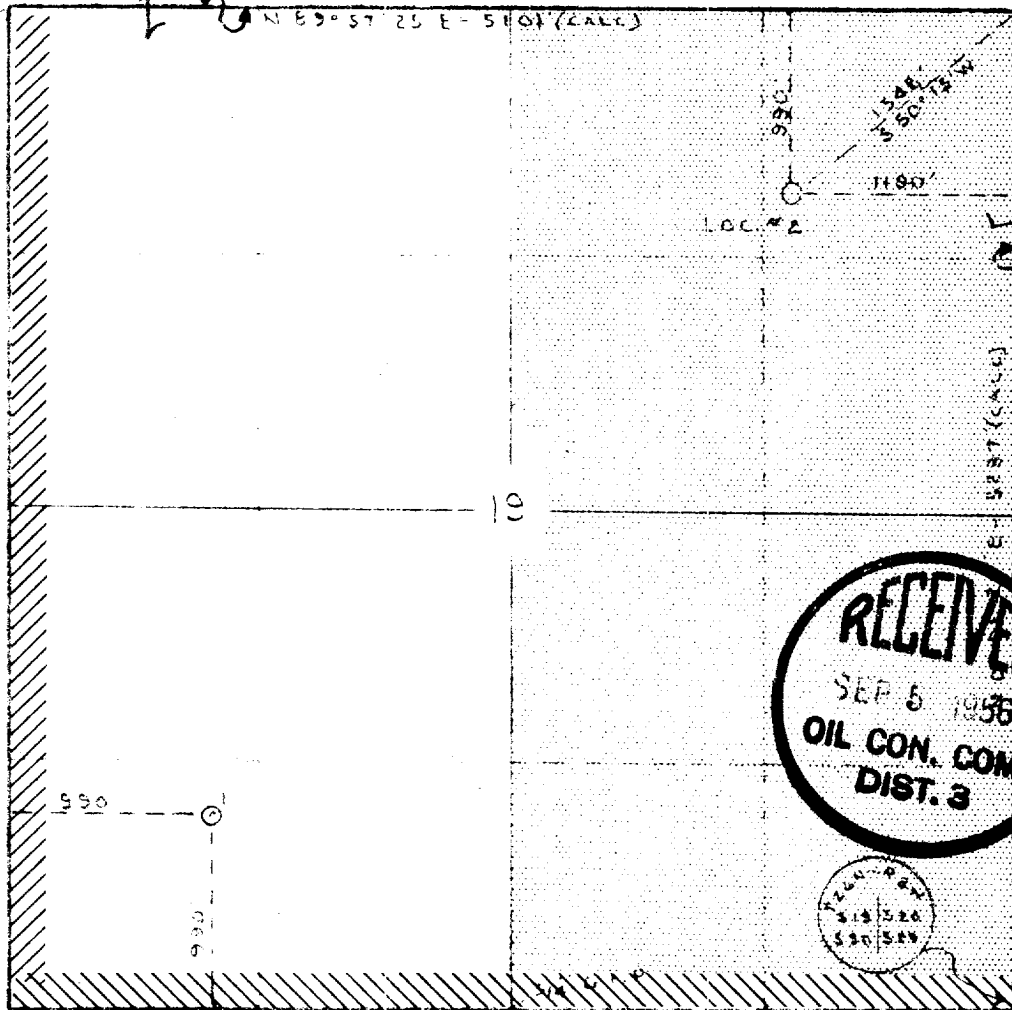

1. Is this Well a Dual Comp.? Yes No. X.
2. If the answer to Question 1 is yes, are there any other dually completed wells within the dedicated acreage? Yes No No.

This is to certify that the above plat was prepared from field notes of actual surveys made by me or under my supervision and that the same are true and correct to the best of my knowledge and belief.

Name B. J. [Signature]
Position Asst. Engineer, Div. of Geology
Representing Magnolia Petroleum Company
Address Box 333 - Miami, Texas

Date Surveyed June 26, 1956
[Signature]
Registered Professional Engineer and/or Land Surveyor 1115