

(SUBMIT IN TRIPLICATE)


Indian Agency _____

UNITED STATES
DEPARTMENT OF THE INTERIOR
GEOLOGICAL SURVEY

Allotment _____

Allotment _____

Lease No. _____

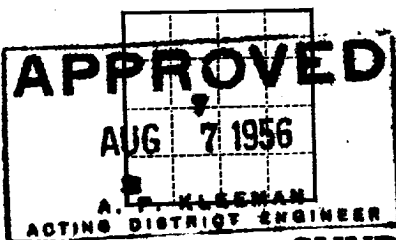

SUNDRY NOTICES AND REPORTS ON WELLS

NOTICE OF INTENTION TO DRILL	SUBSEQUENT REPORT OF WATER SHUT-OFF
NOTICE OF INTENTION TO CHANGE PLANS	SUBSEQUENT REPORT OF SHOOTING OR ACIDIZING
NOTICE OF INTENTION TO TEST WATER SHUT-OFF	SUBSEQUENT REPORT OF ALTERING CASING
NOTICE OF INTENTION TO REDRILL OR REPAIR WELL	SUBSEQUENT REPORT OF REDRILLING OR REPAIR
NOTICE OF INTENTION TO SHOOT OR ACIDIZE	SUBSEQUENT REPORT OF ABANDONMENT
NOTICE OF INTENTION TO PULL OR ALTER CASING	SUPPLEMENTARY WELL HISTORY
NOTICE OF INTENTION TO ABANDON WELL	

Indicate above by check mark nature of report, notice, or other data)

RECEIVED
AUG 7 1956
U. S. GEOLOGICAL SURVEY
FARMINGTON, NEW MEXICO

August 6, 1956

Well No. V 1-7 is located 800 ft. from SE line and 800 ft. from W line of sec. 7


SW/4 SE/4 7 SW SW N.M.P.M.
(1/4 Sec. and Sec. No.) (Twp.) (Range) (Meridian)
Wilcox (Chuska) San Juan New Mexico
(Field) (County or Subdivision) (State or Territory)

The elevation of the surface above sea level is 8848.0 ft.

DETAILS OF WORK

(State names of and expected depths to objective sands; show sizes, weights, and lengths of proposed casings; indicate mudding jobs, cementing points, and all other important proposed work)

To 8000'. Prepare to drill 6-2/3" hole to approx. 7000'. Set 4 1/2" casing and cement with 200 cc of 20 lb cement. Perforate the 4 1/2" casing and fracture the Dakota formation with approx. 20,000 gals water and 20,000 cc of 20 lb cement and wash well in. Total approval to proceed received 7-22-56.



I understand that this plan of work must receive approval in writing by the Geological Survey before operations may be commenced

Company STANDARD OIL COMPANYAddress 200 Stone Building
Albuquerque, New MexicoBy Ray Phillips, Jr.
Ray Phillips, Jr.Title Asst Eng, Production Operations

