

UNITED STATES
DEPARTMENT OF THE INTERIOR
GEOLOGICAL SURVEY

SUNDRY NOTICES AND REPORTS ON WELLS

(Do not use this form for proposals to drill or to deepen or plug back to a different reservoir. Use Form 9-331-C for such proposals.)

1. oil well gas well other

2. NAME OF OPERATOR
El Paso Natural Gas Company

3. ADDRESS OF OPERATOR
P.O. Box 289, Farmington, New Mexico 87401

4. LOCATION OF WELL (REPORT LOCATION CLEARLY. See space 17 below.)
AT SURFACE: 1700'N, 1800'W, Sec. 12, T26N, R7W
AT TOP PROD. INTERVAL:
AT TOTAL DEPTH:

5. LEASE
SF 079160

6. IF INDIAN, ALLOTTEE OR TRIBE NAME

7. UNIT AGREEMENT NAME

8. FARM OR LEASE NAME
Rincon

9. WELL NO.
#14

10. FIELD OR WILDCAT NAME
South Blanco Pictured Cliffs

11. SEC., T., R., M., OR BLK. AND SURVEY OR AREA
NW/4, Sec. 12, T-26-N, R-7-W


12. COUNTY OR PARISH | 13. STATE
Rio Arriba | New Mexico

14. API NO.

15. ELEVATIONS (SHOW DF, KDB, AND WD)
6431' GL

16. CHECK APPROPRIATE BOX TO INDICATE NATURE OF NOTICE, REPORT, OR OTHER DATA


REQUEST FOR APPROVAL TO:	SUBSEQUENT REPORT OF:
TEST WATER SHUT-OFF <input type="checkbox"/>	<input type="checkbox"/>
FRACTURE TREAT <input type="checkbox"/>	<input type="checkbox"/>
SHOOT OR ACIDIZE <input type="checkbox"/>	<input type="checkbox"/>
REPAIR WELL <input type="checkbox"/>	<input type="checkbox"/>
PULL OR ALTER CASING <input type="checkbox"/>	<input type="checkbox"/>
MULTIPLE COMPLETE <input type="checkbox"/>	<input type="checkbox"/>
CHANGE ZONES <input type="checkbox"/>	<input type="checkbox"/>
ABANDON* <input type="checkbox"/>	<input checked="" type="checkbox"/>
(other)	

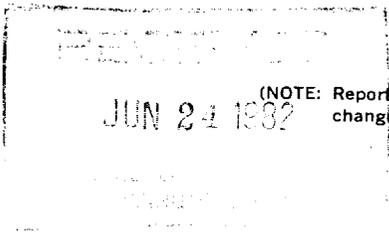

17. DESCRIBE PROPOSED OR COMPLETED OPERATIONS (Clearly state all pertinent details, and give pertinent dates, including estimated date of starting any proposed work. If well is directionally drilled, give subsurface locations and measured and true vertical depths for all markers and zones pertinent to this work.)*

The following procedure was used to plug and abandon the subject well:

- 1) Pulled 1" tubing and ran 1 1/4" workstring.
- 2) Pumped 90 sk cement plug and covered open hole and filled 7" casing to 2320'.
- 3) Pumped 21 sk cement plug from 1834' to 1940'.
- 4) Perfed 2 squeeze holes at 205' and pumped 60 sk cement plug. Circulated annulus.
- 5) Installed dry hole marker.
- 6) Clear and reseed location.

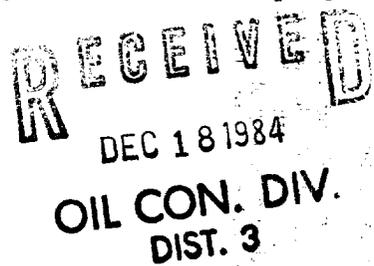

Subsurface Safety Valve: Manu. and Type _____ Set @ _____ Ft.

18. I hereby certify that the foregoing is true and correct

SIGNED Douglas W. Mansueti TITLE Production Engineer DATE JUL 14 1982

(This space for Federal or State office use)

APPROVED BY _____ TITLE _____ DATE DEC 14 1984

CONDITIONS OF APPROVAL, IF ANY:

Approved as to plugging of the well bore. Liability under bond is retained until surface restoration is completed.

APPROVED
AS AMENDED

DEC 14 1984

/s/ J. Stan McKee
M. MILLENBACH
AREA MANAGER