

UNITED STATES
DEPARTMENT OF THE INTERIOR
GEOLOGICAL SURVEY

SUNDRY NOTICES AND REPORTS ON WELLS

(Do not use this form for proposals to drill or to deepen or plug back to a different reservoir. Use Form 9-331-C for such proposals.)

1. oil well ☐ gas well ☒ other ☐

2. NAME OF OPERATOR
J. Gregory Merrion & Robert L. Bayless

3. ADDRESS OF OPERATOR
P. O. Box 1541, Farmington, NM 87401


4. LOCATION OF WELL (REPORT LOCATION CLEARLY. See space 17 below.)
AT SURFACE: 2300 FNL & 750 FEL
AT TOP PROD. INTERVAL: Same
AT TOTAL DEPTH: Same

16. CHECK APPROPRIATE BOX TO INDICATE NATURE OF NOTICE, REPORT, OR OTHER DATA

REQUEST FOR APPROVAL TO:
TEST WATER SHUT-OFF ☐
FRACTURE TREAT ☐
SHOOT OR ACIDIZE ☐
REPAIR WELL ☐
PULL OR ALTER CASING ☐
MULTIPLE COMPLETE ☐
CHANGE ZONES ☐
ABANDON* ☒
(other) Plug

SUBSEQUENT REPORT OF:

☐
☐
☐
☐
☐
☐
☐
☐
☐
☐

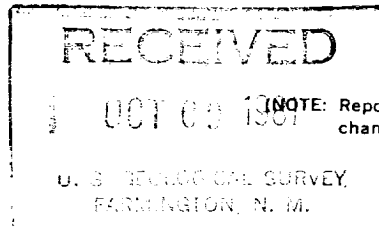

(NOTE: Report results of multiple completion or zone change on Form 9-330)



5. LEASE
NM 04073

6. IF INDIAN, ALLOTTEE OR TRIBE NAME

7. UNIT AGREEMENT NAME

8. FARM OR LEASE NAME
Hill

9. WELL NO.
1

10. FIELD OR WILDCAT NAME
Blanco Mesa Verde

11. SEC., T., R., M., OR BLK. AND SURVEY OR AREA
Sec. 30, T26N, R2W

12. COUNTY OR PARISH Rio Arriba 13. STATE New Mexico

14. API NO.
30-039-21851

15. ELEVATIONS (SHOW DF, KDB, AND WD)
7447' GL

17. DESCRIBE PROPOSED OR COMPLETED OPERATIONS (Clearly state all pertinent details, and give pertinent dates, including estimated date of starting any proposed work. If well is directionally drilled, give subsurface locations and measured and true vertical depths for all markers and zones pertinent to this work.)*

Request permission to plug and abandon this well for lack of commercial quantities of natural gas. The Hill #1 will be plugged as follows:

1. Spot 47 sx 'B' cement from 6185 ft. to 5550 ft. to cover all perforations and Mesa Verde.
2. Spot 37 sx 'B' cement from 3950 ft. to 3450 ft. to cover Pictured Cliffs, Fruitland, Kirtland and Ojo Alamo.
- * 3. Back off casing @ 240 ft. or perforate hole @ 240 ft. Fill up hole from 240 ft. to surface w/cement.
4. Erect dry hole marker and reclaim surface per BLM specifications.

This request is pursuant to verbal plugging instructions received from Steve Mason of your office 10/8/81.
Subsurface Safety Valve: Manu. and Type _____ Set @ _____ Ft.

18. I hereby certify that the foregoing is true and correct

SIGNED _____ TITLE Engineer DATE 10/8/81

(This space for Federal or State office use)

APPROVED BY [Signature] TITLE Acting Dist. Supt. DATE OCT 15 1981
CONDITIONS OF APPROVAL, IF ANY: _____

*See Instructions on Reverse Side

NMOCC

U. S. GEOLOGICAL SURVEY
Drawer 600
Farmington, New Mexico 87499-00600

Attachment to Notice of
Intention to Abandon

Re: Permanent Abandonment

Well: 1 Hill

CONDITIONS OF APPROVAL

1. Plugging operations authorized are subject to the attached "General Requirements for Permanent Abandonment of Wells on Federal Leases."
2. The Farmington office (telephone (505) 325-4572) is to be notified in sufficient time for a representative to witness all plugging operations.
3. Blowout prevention equipment is required.
4. In addition to normal filling of pits and cleanup of location, additional surface restoration work may be required, i.e. ripping of pad and/or access road, reseeding, etc. We have asked the Bureau of Land Management for the surface restoration requirements for this well and we should be able to furnish you these requirements within 30 days. After plugging the well and before making final clean-up, you should contact this office unless you have already been advised as to what additional surface restoration work is required.
- * 5. The following modifications to your plugging program are to be made (when applicable):
 - a) Perforate 4½" casing at 287' and spot cement plug inside and outside casing from 287' to 187'.
 - b) Spot cement plug inside 4½" casing from 50' to surface.



Office Hours: 7:30 A.M. to 4:15 P.M.