SUBMIT IN TRIPLICATE.

Form approved, Budget Bureau No. 42-R1425.

(Other instructions on

	DEPARTMEN	TED STATES IT OF THE INTE OGICAL SURVEY	·	reverse s		3() - 030 5. LEASE DESIGNATION Contract # 10	AND BEHIAL NO.
APPLICATION FOR PERMIT TO DRILL, DEEPEN, OR PLUG BACK					6. IF INDIAN, ALLOTTE	E OR THIBE NAME	
1a. TYPE OF WORK			·			-	
D. TYPE OF WELL	RILL 🛛	DEEPEN 🗌	PLU	JG BA	CK 🗌	7. UNIT AGREEMENT N	AME
OIL [CAS OTHER		SINGLE ZONE	MULTIP ZONE	LE	8. FARM OR LEASE NA	M E
2. NAME OF OPERATOR						- Jicarilla "B	11
Tenneco 0il						9. WELL NO.	
3. ADDRESS OF OPERATOR		_				4E	
720 South Co	olorado Blvd.,	Denver, Co. 802	22			10. FIELD AND POOL, OR WILDCAT	
4. LOCATION OF WELL () At surface	Report location clearly an	d in accordance with any	State requiremen	ots.*)		Basin Dakota	
940' FSL, 88	O' FEL					11. SEC., T., R., M., OR BLK. AND SURVEY OR AREA	
At proposed prod. zo	ne						
						Sec. 21, T2	•
14. DISTANCE IN MILES	AND DIRECTION FROM NE	AREST TOWN OR POST OFFI	CE.			12. COUNTY OR PARISH	13. STATE
18.7 miles North/Northeast of Counselor, New Mexico					Rio Arriba	N.M.	
10. DISTANCE FROM PROPOSED* LOCATION TO NEAREST PROPERTY OR LEASE LINE, FT.			16. No. OF ACRES IN LEASE 17. No. TO 2560.00			OF ACEES ASSIGNED THIS WELL 320.00	
(Also to nearest drig. unit line, if any) 18. Distance from Proposed Location* TO Nearest Well, Drilling, Completed, OR Applied For, on this lease, ft.			·		BY OR CABLE TOOLS		
			_				
21. ELEVATIONS (Show wh	nether DF, RT, GR, etc.)		7300		l Rota	22. APPROX. DATE WO	RE WILL CTAPE
6536 GR					A.S.A.P.		
23.		PROPOSED CASING AN	D CEMENTING	PROGRA	M		
SIZE OF HOLE	SIZE OF CASING	WEIGHT PER FOOT	SETTING DE	PTH		QUANTITY OF CEMEN	T
12 ½ "	8 5/8" New	24# K-55			Circ	ulate to Surface	
7 7/8"	4 1/2" New	10.5# - 11.6#			Circu	ate to surface in two stage	
See Attac		, pressures, or	geologis	- hazard	s are	evnected	
no abhorile	ai lemberaldies	· PICSSUICS · UI	quoibqib i	nuzai u	2 a:c (CAPCULGU	

The gas is dedicated



IN ABOVE SPACE DESCRIBE PROPOSED PROGRAM: If proposal is to deepen or plug back, give data on present productive zone and proposed new productive zone. If proposal is to drill or deepen directionally, give pertinent data on subsurface locations and measured and true vertical depths. Give blowout preventer program, if any.

signed M. Freeman	Staff Production Analyst	December 27,1979
(This space for Federal or State office use)	TO A ARTIVED	
PERMIT NO.	ARDROVAL DATE	
APPROVED BYCONDITIONS OF APPROVAL, IF ANY:	Janu of Line	DATE DEC 31 1979
ak Ent	JEST ENGINEER	U. S. GEOLOGICAL SURVEY DURANGO, COLO.
UK	*See Instructions On Reverse Side	- Dolgardol coros

OIL CONSERVATION DIVISION

STATE OF NEW MEXICO

P. O. BOX 2088 LHERGY ME MINERALS DEFARTMENT SANTA FE, NEW MEXICO 87501

Form C-102 kevised lu-1-7

res must be from the cuter houndaries of the Section.

	<u></u>	All distances must be		1 110 University CV	The Destination		T
Cperator			Lease				Well No.
TENNECO OIL COMPANY			JICA	JICARILLA "B"			<u> </u>
Unit Letter	Section	Township	Fiang		County		
P	21	26N		W	Ric	Arriba	
Actual Footage Loc			005			. .	
940		South line		fee	et from the	East	line
Ground Level Elev.		mation	Pool				cated Acreage:
6536	Dakota		Basi	n Dakota		F 32	0.00 Acres
2. If more the interest as	nan one lease is nd royalty).		well, outline	each and ide	entify the ov	vnership therec	f (both as to working
dated by one of the second dated dated by one of the second dated dated dated by one of the second dated dat	No If a is "no," list the if necessary.)	nswer is "yes," typowners and tract deduction to the well unti	ooling. etc? pe of consoli lescriptions v	dation	ctually been	n consolidated. d (by communi	(Use reverse side of tization, unitization, coved by the Commis-
		=(1100111)				CE	RTIFICATION
	1	=			31	CL.	· · · · · · · · · · · · · · · · · · ·
	1		CONTRACT 320.00			tained herein is	that the information con- strue and complete to the viedge and belief.
	 			 O O			······································
		Sec.	TENNECO			(AFT)	
·		21	CONOCO ARCO	1		I hereby the short on shis of carlo under the property of carlo under the property of the showledge and	yeither well location plan well tred from field gyrveys hade by me or wiston, and that the same wiston, and the best of my belief.
				9/101	830'	October Registered Profesand/or Land Surv Fred Certificate No.	ssionali Engineer
0 330 660	90 1320 1650 19	80 2310 2640	2000 1500	1000	500 0	3950	P VCOR

TENNECO OIL COMPANY ROCKY MOUNTAIN DIVISION PENTHOUSE, 720 SOUTH COLORADO BOULEVARD DENVER, COLORADO 80222

DRILLING PROGRAM

DATE: November 19, 1979

LEASE:

ST = 78

Jicarilla B

WELL NO.: 4-E

LOCATION:

940' FSL, 880' FEL

Sec. 21, T 26N, R 5W

Rio Arriba County, New Mexico

FIELD: Jicarilla Dakota

ELEVATION: 6530' Est. G.L.

TOTAL DEPTH: 7500'

PROJECTED HORIZON Dakota

APPROVED BY: J. C. 2. Ch.

DK/ms

1st Rev.

ESTIMATED FORMATION TOPS

000	2500	(Water)
Pictured Cliffs	2950	(Gas)
Cliffhouse	4670	(Gas)
Menefee		
Point Lookout		
Gallup	6230	(Gas/0il)
Greenhorn	7170	
Dakota	7230	(Gas)

Surface Formation: San Jose

No abnormal temperatures or pressures are expected.

DRILLING, CASING, AND CEMENT PROGRAM

- Move in, rig up rotary tools.
- 2. Drill a 12 1/4" hole to ± 350 '.
- 3. Run 8 5/8", 24#/ft, K-55, ST&C casing to T.D.
- 4. Cement with Class "B" cement with 2% CaCl2. Circulate cement to surface.
- 5. Wait on cement a minimum of twelve hours. Nipple up blowout preventer and manifold with relief lines. Pressure test to 600 psi for 30 minutes. Test pipe and blind rams.
- 6. Drill a 7 7/8" hole to T.D.
- 7. Run open hole logs.
- 8. Run 4 1/2" casing to T.D. as per casing design.
- 9. Cement in two stages with sufficient volume to circulate cement to surface. Locate DV tool above Cliffhouse to prevent lost returns in Mesa Verde. Lead in first stage with light cement (pozmix, Halliburton lite, etc.). Tail in with sufficient volume of Class "B" cement to cover the Dakota. Circulate a minimum of four hours between stages. Lead in second stage with light cement Tail in with 50 sacks Class "B" neat.
- 10. Set slips, cut casing, and install well head.
- 11. MORT.

34

. .

12. If well is non-productive, plug and abandon as per regulatory agency specifications.

CASING PROGRAM

Surface: 350' of 8 5/8", 24#, K-55, ST&C casing.

Production: 4 1/2", 10.5=, K-55, ST&C casing to 7,000'.

4 1/2", 11.6±, K-55, ST&C casing below 7,000'.

MUD PROGRAM

0-350 Native solids. Have sufficient viscosity to gel chemical to clean hole and run casing.

350-T.D. Low solids. Gel chemical. 32 viscosity and 10-15 water loss down through the Mancos. Before reaching Gallup, add 6% LCM and run viscosity at 38-40 seconds. After penetrating Gallup, let LCM drop.

EVALUATION

Cores and DST's: No cores or DST's are anticipated.

Deviation Surveys:

- 1. Survey surface hole every 100° . Maximum allowable deviation at surface T.D. is 1° .
- 2. From surface to total depth, Deviation surveys must be taken every 500' or each trip, whichever is first. This may entail running the TOTCO on wireline. Record each survey on the IADC Drilling Report Sheet. Maximum allowable total deviation change is 5°.

Samples:

15 4 28

No samples required.

Logs:

GR/Induction
Densilog
Repeat formation tester possible in Gallup.

BLOWOUT EQUIPMENT

10" 900-series, double ram hydraulic operated with closing unit and 40 gallon accumulator.

REPORTS

Drilling reports for the past 24 hours will include depth, footage, time distribution, activity breakdown, mud properties, bit record, bottom hole assembly, daily and cumulative mud costs, plus any other pertinent information, will be called into Tenneco Oil Company, Denver, Colorado, between 7:30 a.m. and 8:00 a.m.

- 303-758-7130 (office) Don Barnes.
 303-758-7287 (office) Don Barnes' private line, Monday-Friday (before 7:45 a.m.)
- 2. 303-936-0704 (home) Don Barnes, weekends and holidays.

8 4 TY

3. 303-795-0221 (home) John Owen, if Don Barnes is not available.


The yellow sheet of the IADC Report to be filled out completely, the original copy of the drilling time recorder, and copies of any invoices from this well, signed and received for Tenneco Oil Company will be mailed daily to:

TENNECO OIL COMPANY
ROCKY MOUNTAIN DIVISION
PENTHOUSE, 720 SOUTH COLORADO BOULEVARD
DENVER, COLORADO 80222

ATTENTION: Drilling Department

In case of emergency, notify the following:

- 1. Mr. Don Barnes, Division Drilling Engineer 303-936-0704
- 2. Mr. John Owen, Project Drilling Engineer 303-795-0221
- 3. Mr. Mike Lacey, Division Production Manager 303-979-0509

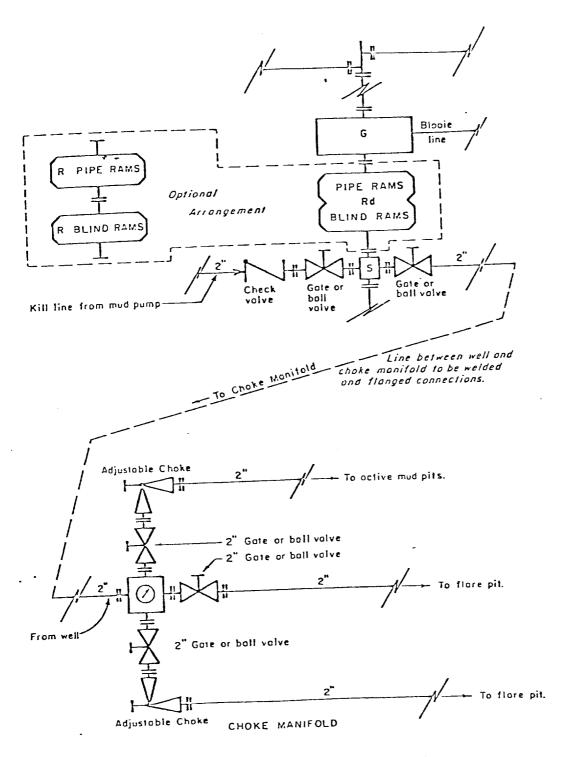

All equipment to be 3,000 psi working pressure except as noted.

- Double ram type preventer with two sets of roms.
- Rd Single rom type preventer with one set of roms.
- Drilling spool with side outlet connections for choke and kill lines.
- Rotating head 150 psi working pressure minimum

ARRANGEMENT C

TENNECO OIL COMPANY ROCKY MOUNTAIN DIVISION

REQUIRED MINIMUM BLOWOUT PREVENTER AN CHOKE MANIFOLD

J. MAGILL 10-26-79

- 1. Existing Road Please refer to Map No. 1 which shows the existing roads. New roads which will be required have been marked on this map. All existing and new roads will be properly maintained during the duration of this project.
- 2. Planned Access Roads Please refer to Map No. 1. The grade of the access roads will be consistent with that of the local terrain. The road surface will not exceed twenty feet (20') in width. Upon completion of the project, the access road will be adequately drained to control soil erosion. Drainage facilities may include ditches, water bars, culverts or any other measure deemed necessary by trained Company personnel to insure proper drainage. Gates and/or cattleguards will be installed if necessary.
- 3. Location of Existing Wells Please refer to Map No. 2.
- 4. Location of Tank Batteries, Production Facilities, and Production Gathering and Service Lines Please refer to Maps No. 1 and No. 2. Map No. 2 shows the existing roads and new proposed access roads. All known production facilities are shown on these two maps.
- 5. Location and Type of Water Supply Water for the proposed project will be obtained from a private source.
- 6. Source of Construction Materials No additional materials will be required to build either the access road or the proposed location.
- 7. Methods of Handling Waste Materials All garbage and trash materials will be put into a burn pit shown on the attached Location Plat No. 1. When clean-up operations are begun on the proposed project, the burn pit with its refuse will be buried to a depth of at lease three feet (3'). A latrine, the location of which is also shown on Plat No. 1. will be provided for human waste. If large amounts of liquids are J left in the reserve pit after completion of the project, the pit will be fenced until the liquids have had adequate time to dry. The location clean-up will not take place until such time as the reserve pit can be properly covered over to prevent run-off from carrying any of these materials into the watershed. No earthen pit will be located on natural drainage; all earthen pits will be so constructed as to prevent leakage from occurring.

- Ancillary Facilities No camps or airstrips will be associated with this project.
- 9. Wellsite Layout Please refer to the attached Plat No. 1.
- 10. Plans for Restoration of the Surface After completion of the proposed project the location will be cleaned and leveled. The location will be left in such a condition that will enable reseeding operations to be carried out. Seed mixture as designated by the responsible government agency will be used. The reseeding operation will be performed during the time period set forth by the regulatory body. The location production equipment will be painted as designated by the responsible government agency.
- 11. Other Information The proposed site is located on the Jicarilla Indian Reservation with minerals and surface belonging to the same. The surface topography is broken with sandy soil, fractured sandstone & sandstone outcrops. The principal vegetation is juniper & sagebrush.
- 12. Operator's Representative -

SEE DRILLING PROGNOSIS

I hereby certify that I, or persons under my direct supervision, have inspected the proposed drillsite and access route; that I am familiar with the conditions which presently exist; that the statements mad in this plan are, to the best of my knowledge, true and correct; and that the work associated with the operations proposed herein will be performed by Tenneco Oil Company Company and its contractors

and sub-contractors in conformity with this plan and the terms and conditions under which it is approved.

L. Freeman

Staff Production Analyst

LF/gh

TENNECO OIL COMPANY

CALCULATION SHEET

EXHIBIT

ON PAOFSL 880 FEL SEC 21 T26N R8W

TION 940FSL 880 FEL SEC 21 T26N R8W

DATE 12/27/79

- 1. Stock Pile Topsoil, Place TREES AND brush in pits AND COVER, FENCE All Pits.
- 2. PIACE A GrAIN Around SouthEAST Corner of Location

