## SUBMIT IN TRIPLICATE\*

(Other instructions on reverse side)

#### Form approved. Budget Bureau No. 42-R1425.

5. LEASE DESIGNATION AND SERIAL NO.

Contract No. 153

# UNITED STATES DEPARTMENT OF THE INTERIOR

GEOLOGICAL SURVEY

	GEC	JEOGICAL SOILL	· · ·	NI OD DI	LIC DA	CV	6. IF INDIAN, ALLOTTE	E OR TRIBE NAME	
APPLICATION FOR PERMIT TO DRILL, DEEPEN, OR PLUG BACK							Jicarilla Apache		
DRILL X DEEPEN							7. UNIT AGREEMENT NAME		
b. TYPE OF WELL	व दिरो		811	NGLE X	MULTIPLE	· 🖂 🗋	8. FARM OR LEASE NA	S. FARM OR LEASE NAME	
	OIL GAS WELL X OTHER ZONE X ZONE				ZUNE		Jicarilla ".	J''	
2 NAME OF OPERATOR Supron Energy Corporation							9. WELL NO.		
Supron Energ	y corporation	JII					11 - E		
	0 D. J	- Nou Movico	874	0.1			10. FIELD AND POOL, OR WILDCAT		
P. O. BOX 80	port location clearl	y and in accordance wit	h any S	tate requiremen	ts.*)	,	Basin Dakota		
P. O. Box 808, Farmington, New Mexico 87401  4. LOCATION OF WELL (Report location clearly and in accordance with any State requirements.*)  At surface 800' F/North line and 800' F/East line							11. SEC., T., B., M., OR BLK. AND SURVEY OR AREA		
At proposed prod. zone Same as above							Sec. 25, T26N, R5W, N.M.P.M.		
14. DISTANCE IN MILES A	ND DIRECTION FROM	NEAREST TOWN OR POS	T OFFICE	*		_	12. COUNTY OR PARISH 13. STATE		
15 Miles Sou							Rio Arriba	New Mexico	
I THE THE PROPERTY OF THE PROP	SED#		16. NO	. OF ACRES IN I	LEASE	17. NO. C	OF ACRES ASSIGNED HIS WELL		
LOCATION TO NEAREST PROPERTY OR LEASE L (Also to Dearest drig	INE, FT. 800 Ft.	800 Ft.	2				20 (E½)		
10 DIGTANCE EDOM PROP	OSED LOCATION*	•	19. PR	OPOSED DEPTH		20. вота	ARY OR CABLE TOOLS		
TO NEAREST WELL, DI OR APPLIED FOR, ON THI	KILLING, CUMPDELED	900 Ft.	7	590		Rot	otary		
21. ELEVATIONS (Show whe		tc.)					22. APPROX. DATE WORK WILL START*		
6639 GR							June 1, 19	80	
23.		PROPOSED CASI	NG ANI	CEMENTING	PROGRAM	<b>M</b>		_	
	l component	weight per f	тоот	SETTING DE	PTH		QUANTITY OF CEME	NT	
SIZE OF HOLE	8-5/8"	<u> </u>		250		175	sx		
124	45"	10.50		7590		1000	sx		
7-7/8	45	10.50				,			
be pressure a starch bas three stages 400 sx of 50 stage 150 stop to be a zone will be cleaned will be nip	tested. The se mud as the se mud as the second as follows 0-50 POZ mix of HOWCO It 2,300 ft. e perforated up and tubin pled down ar	irculated back irculated back well will be circulating ir First stage followed by it followed by The pipe will and fractured and the well test of the proposal is to detectionally, give pertinent.	media e 350 50 sx by 50 L be d to dled a sted.	m. Pipe sx of 50- of class sx of claspressure to the last stimulate bove the l	will b -50 POZ "B" ce ass "B" tested produce Dakota	e run Z mix, ement with and to tion. zone.	and cemented Second stage and the Third the estimated he Dakota The well wil The wellhead	in dement	
preventer program, if an 24.	Martin	11		rea Super			DIST. 6-1	3 2.00	
(This space for Fed	eral or State office	use)		APPROVAL DATE		A	FOVED,	·	
PERMIT NO.				VLI BOANT DATE		A5 /	<u></u>		
APPROVED BY CONDITIONS OF APPRO			ITLE			ga	mes + tems		
	ok I such				_	<u> </u>			

P. O. DOX 2088 STATE OF NEW MEXICO Revised 10-1-78 SANTA FE, NEW MLXICO 87501 ENERGY AND MINERALS DEPARTMENT All distances must be from the outer houndaries of the Section Well 110. 11-E JICARILLA "J" SUPRON ENERGY CORPORATION County Horrye Section Unit Letter RIO ARRIBA 5 WEST 26 NORTH 25 Actual Fastage Location of Well; 800 NORTH line and feat from the Pool Freducing Formation Ground Level Clev. BASIN 6639 DAKOTA 1. Outline the acrenge dedicated to the subject well by colored pencil or hachare marks on the plat below. 2. If more than one lease is dedicated to the well, outline each and identify the ownership thereof (both as to working interest and royalty). 3. If more than one lease of different ownership is dedicated to the well, have the interests of all owners been consolidated by communitization, unitization, force-pooling. etc? If answer is "yes," type of consolidation \_\_ ∏ No Il answer is "no," list the owners and tract descriptions which have actually been consolidated. (Use reverse side of this form if necessary.). No allowable will be assigned to the well until all interests have been consolidated (by communitization, unitization, forced-pooling, or otherwise) or until a non-standard unit, climinating such interests, has been approved by the Division. CERTIFICATION I hereby certify that the Information contained herein is true and complete to the ·800' Rudy D. Motto Position Area Superintendent SUPRON ENERGY CORPORATION February 29, 1980 25 February Centificate No.

100

1000

1463

#### SUPRON ENERGY CORPORATION

### JICARILLA "J" No. 11-E NE ½ Sec. 25, T-26N, R-5W, N.M.P.M. Rio Arriba County, New Mexico

- 1. The Geologic name of the surface formation is, "Wasatch".
- 2. The estimated tops of important Geologic markers:

Α.	Ojo Alamo	2660 ft.
$B_{ullet}$	Fruitland	2780 ft.
C.	Pictured Cliffs	3114 ft.
D.	Chacra	4000 ft.
E .	Cliff House	4795 ft.
F .	Point Lookout	5245 ft.
G.	Gallup	6450 ft.
$H_{ullet}$	Greenhorn	7200 ft.
I.	Dakota	7290 ft.

3. The estimated depths at which anticipated water, oil or other mineral bearing formations are expected to be encountered are:

<ul><li>B.</li><li>C.</li><li>D.</li><li>E.</li><li>G.</li></ul>	Ojo Alamo Fruitland Pictured Cliffs Chacra Cliff House Point Lookout Gallup	2780 3114 4000 4795 5245 6450	ft. ft. ft. ft. ft. ft.	Dry Gas Gas Gas
G. H.		7200	_	Shale

- 4. The casing program is shown on form 9-331C and all casing is new.
- 5. The lessee's pressure control equipment schematics are attached, along with minimum specifications, testing procedures, and frequencies.
- 6. The type, estimated volumes, and characteristics of the circulating medium are as follows:
  - A. 0 250 ft. Natural Mud.
  - B. 250 7590 ft. Permaloid non dispersed mud containing approx. 180 sx gel, 70 sx of permaloid and 20 sx of CMC.
- 7. The auxiliary equipment to be used will be floats at the bit and a sub on the floor with a full opening valve to be stabbed into the drill pipe when the kelly is not in the string.
- 8. The well is in an area which is partially developed; therefore we will not have a testing and coring program. The logging program is as follows:
  - A. E.S. Induction
  - B. Gamma Ray Density
  - C. Gamma Ray Correlation
  - D. Cement Bond Log
- 9. We do not expect to find any abnormal pressures, temperatures or hydrogen sulfide problems in this partially developed area.
- 10. The anticipated starting date for this well is June 1, 1980.


#### SUPRON ENERGY CORPORATION


#### JICARILLA "J" NO. 11-E

NE/4 Sec. 25, T-26N, R-5W, N-M-P-M-Rio Arriba County, New Mexico

The following attachments are included with this application:


- 1. Topographical map showing proposed location and access road.
- 2. Planned access road is approximately 400 feet.
- 3. Map showing existing production facilities and access road.
- 4. Location of surface equipment if required.
- 5. Drilling and completion water will be obtained from the Jicarilla "J" Water well.
- 6. All pits will be fenced and constructed in such a way as to prevent litter on the location.
- 7. We will dispose of all waste by placing it in the reserve pit and burying it when the well is completed.
- 8. There will be no camp at or near the well site.
- 9. There will be no air strip.
- 10. A plat is attached showing the location of the rig, mud tanks, reserve pit, burn pit, etc.
- 11. A letter of certification is attached. The operator representative for compliance purposes is Rudy D. Motto, Area Superintendent, P.O. Box 808, Farmington, New Mexico 87401. Phone (505) 325-3587.
- 12. After the well is completed, the location will be cleaned up, and bladed. The reserve pit will be allowed to dry and then filled and restored to its natural state.
- 13. The soil is sandy clayey loam, the principal vegetation is sagebrush, greaswood, shadscale, snakeweed, prickly pear, narrowleaf yucca, ground lichen, brome, grama, galleta, western wheat, three-awn.

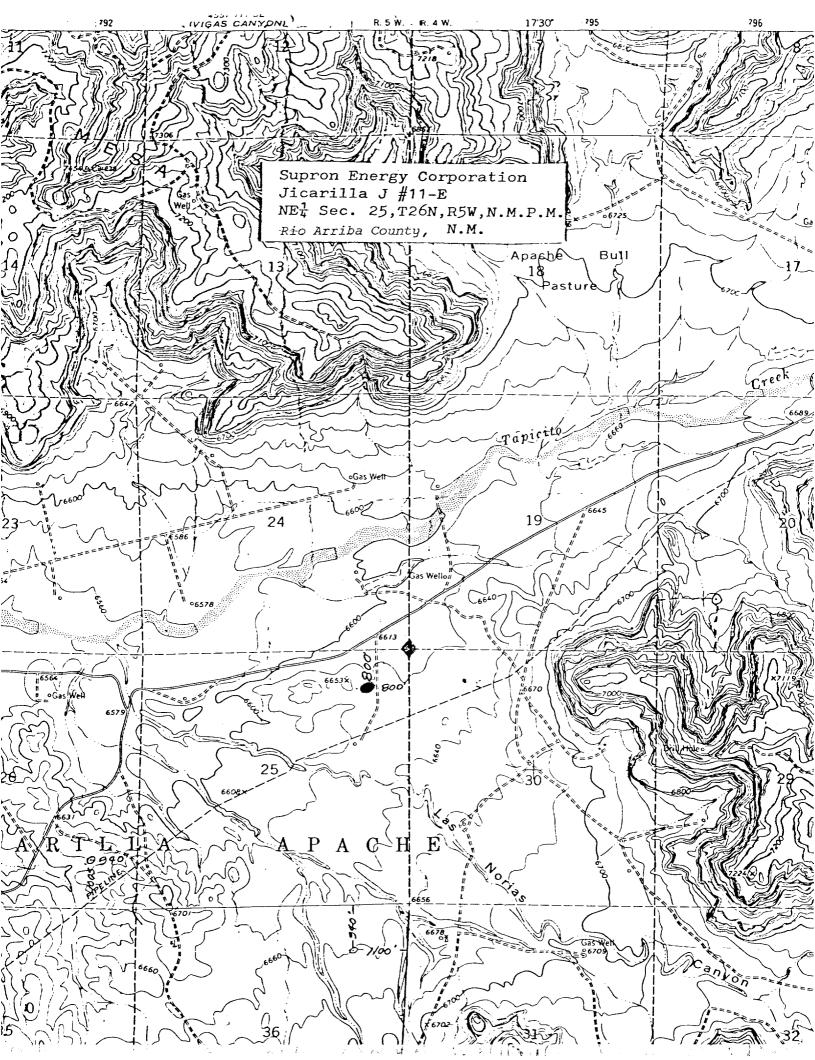

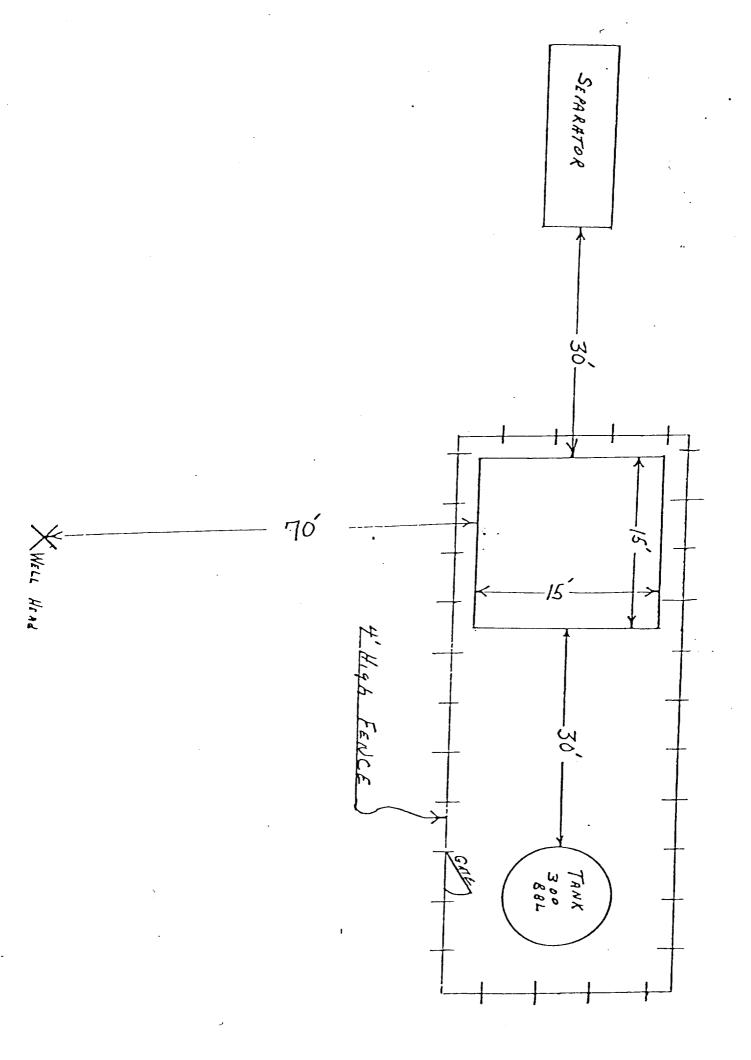


Blowout Preventer will be tested daily and prior to drilling out with the results to be logged on the drillers report.

The B.O.P. and all valve and fittings are rated at 3000 psi working pressure, and hydraulically operated

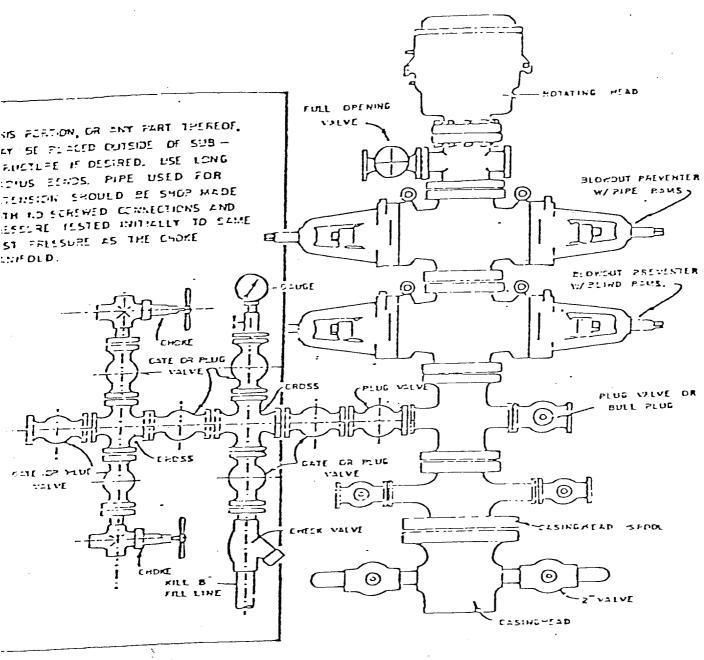

BLOWOUT PREVENTER HOCKUP

JICARILLA "J" NO. 11-E 800 Ft./N; 800 ft./E line Sec. 25, T-26N, R-5W Rio Arriba County, New Mexico

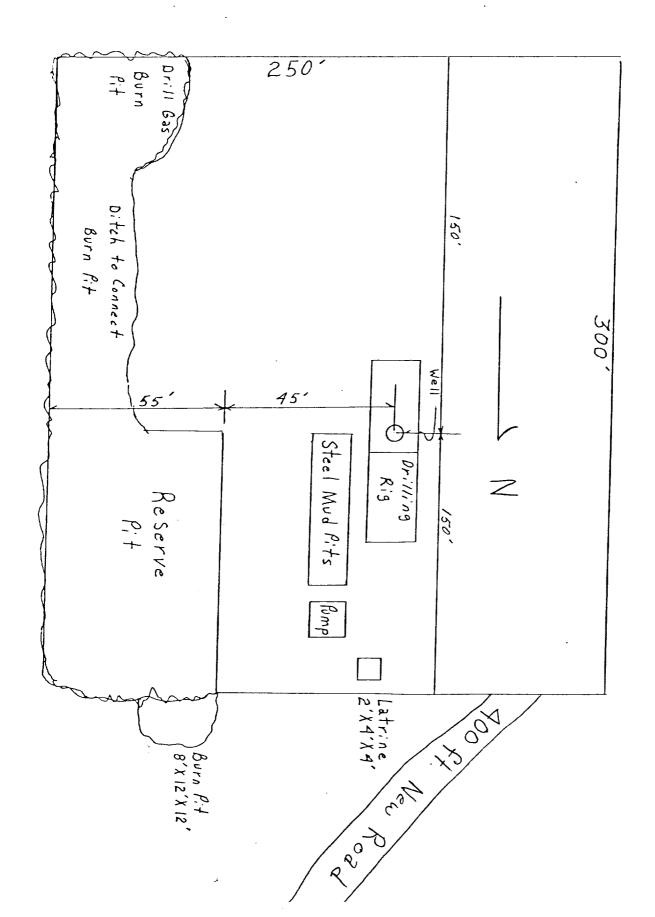

# SUPRON ENERGY CORPORATION Post Office Box 808 FARMINGTON, NEW MEXICO 87401

I hereby certify that I, or persons under my direct supervision, have inspected the proposed drillsite and access route; that I am familiar with the conditions which presently exist; that the statements made in this plan are, to the best of my knowledge, true and correct; and, that the work associated with the operations proposed herein will be preformed by SUPRON ENERGY CORPORATION and its contractors subcontractors in conformity with this plan and the terms and conditions under which it is approved.

SUPRON ENERGY CORPORATION

Rudy D. Motto

Area Superintendent

Phone: 325-3587