	/ ·	
(June 1990) DEPARTME	NITED STATES ENT OF THE INTERIOR E LAND MANAGEMENT RECEIVED	FORM APPROVED Budget Bureau No. 1004-0135 Expires: March 31, 1993 5. Lease Designation and Serial No.
SUNDRY NOTICE	S AND REPORTS ON WELLS drill or to deepen or reentry to aldifferent reservoi OR PERMIT—" for such proposals	NM-011639 6. If Indian, Allottee or Tribe Name
SUBM	IT IN TRIPLICATE CTO MIDIMISTON, NIM	7. If Unit or CA, Agreement Designat
i. Type of Well Oil Well Well Well Other 2. Name of Operator	And the second of the second o	8. Well Name and No. Grevey #2
Curtis J. Little 3. Address and Telephone No. PO. Boy. 1258 Farmingt.	on. NM 87499 (327–9267)	9. API Well No. 30-039-22788 10. Field and Pool, or Exploratory Are
PO Box 1258, Farmington, NM 87.499 (327-9267) 4 Location of Well (Footage, Sec., T., R., M., or Survey Description)		Ballard PC 11. County or Parish, State
890' FNL and 1620' FE	Rio Arriba, NM	
TYPE OF SUBMISSION	X(s) TO INDICATE NATURE OF NOTICE, REP	
Notice of Intent DEGE Subsequent Report AU6 2 Final Abandonment Notice	Abandonment Recompletion Plugging Back Casing Repair Altering Casing Other	Change of Plans New Construction Non-Routine Fracturing Water Shut-Off Conversion to Injection Dispose Water (Note: Report results of multiple completion Completion or Recompletion Report and Lo

give subsurface locations and measured and true vertical depths for all markers and zones pertinent to this work.)* Blow down well and kill well with water. ND wellhead and NU BOP. POH and LD $1-\frac{1}{4}$ " tubing. Open Bradenhead valve. Establish rate down casing with 20 bbls. water.IF bradenhead flows water, PU workstring. Pump water (and frac balls) to confirm perfs are taking water. Mix and pump 49 sxs Class B cement balanced plug from 2330' to 600' over PC and Fruitland, Kirtland, and the Ojo Alamo. Shut-

Completion or Recompletion Report and Log form.)

13. Describe Proposed or Completed Operations (Clearly state all pertinent details, and give pertinent dates, including estimated date of starting any proposed work. If well is directionally drilled,

in well and WOC. RU wireline and RIH. Tag cement top. Pressure test to 500#. Perforate 2 holes at 250". Establish circulation out bradenhead. Mix 46 sxs Class B cement and pump down 2-7/8" casing and circulate cement out of bradenhead. Shut-in well and WOC overnight. ND BOP and cut off wellhead below surface casing. Install P&A marker to comply with regulations. RD, MOL, cut off anchors, and restore location.

1			
14. I hereby certify that the foregoing is not and correct Signed are the league	Title	Agent	Date8-23-95
(This space for Federal or State office use) Approved by Conditions of approval, if any:	Title		Date

Title 18 U.S.C. Section 1001, makes it a crime for any person knowingly and willfully to make to any department or agency of the United or representations as to any matter within its jurisdiction

(Note: Report results of multiple completion on Well


Completion or Recompletion Report and Log form.)

Grevey #2

CURRENT

Ballard Pictured Cliffs

SE, Section 4, T-25-N, R-7-W, Rio Arriba County, NM

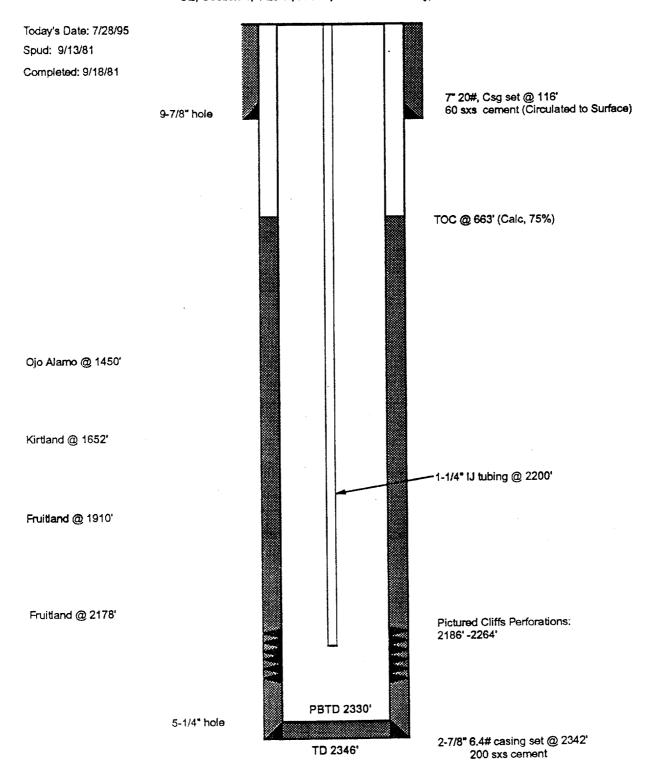

والمرابع والمنافع وال

Grevey #2

PROPOSED P&A

Ballard Pictured Cliffs

SE, Section 4, T-25-N, R-7-W, Rio Arriba County, NM

Today's Date: 7/28/95 Plug #2 250' - Surface with Spud: 9/13/81 50 sxs cement inside casing. Completed: 9/18/81 7" 20#, Csg set @ 116' 60 sxs cement (Circulated to Surface) 9-7/8" hole Perforate @ 250' TOC @ 663' (Calc, 75%) Plug #1 2330' - 500' with 50 sxs cement inside casing. Ojo Alamo @ 1450' Kirtland @ 1652' Fruitland @ 1910' Fruitland @ 2178' Pictured Cliffs Perforations: 2186' -2264'

PBTD 2330

TD 2346'

5-1/4" hole

2-7/8" 6.4# casing set @ 2342' 200 sxs cement