

UNITED STATES
DEPARTMENT OF THE INTERIOR
GEOLOGICAL SURVEY

SUNDRY NOTICES AND REPORTS ON WELLS

(Do not use this form for proposals to drill or to deepen or plug back to a different reservoir. Use Form 9-331-C for such proposals.)

1. oil well ☐ gas well ☒ other ☐

2. NAME OF OPERATOR
Amoco Production Company

3. ADDRESS OF OPERATOR
501 Airport Dr., Farmington, NM 87401

4. LOCATION OF WELL (REPORT LOCATION CLEARLY. See space 17 below.)
AT SURFACE: 910' FNL x 1740' FWL
AT TOP PROD. INTERVAL: Same
AT TOTAL DEPTH: Same

16. CHECK APPROPRIATE BOX TO INDICATE NATURE OF NOTICE, REPORT, OR OTHER DATA

5. LEASE
Jicarilla Apache 102

6. IF INDIAN, ALLOTTEE OR TRIBE NAME
Jicarilla Apache

7. UNIT AGREEMENT NAME

8. FARM OR LEASE NAME
Jicarilla Apache 102

9. WELL NO.
29A

10. FIELD OR WILDCAT NAME
Blanco Mesaverde/BS Mesa Gallup

11. SEC., T., R., M., OR BLK. AND SURVEY OR AREA
NE/4, NW/4, Section 9 T26N, R4W

12. COUNTY OR PARISH
Rio Arriba

13. STATE
New Mexico

14. API NO.
30-039-22931

15. ELEVATIONS (SHOW DF, KDB, AND WD)
71-12' -GL


REQUEST FOR APPROVAL TO:

TEST WATER SHUT-OFF ☐
FRACTURE TREAT ☐
SHOOT OR ACIDIZE ☐
REPAIR WELL ☐
PULL OR ALTER CASING ☐
MULTIPLE COMPLETE ☐
CHANGE ZONES ☐
ABANDON* ☒

SUBSEQUENT REPORT OF:

☐
☐
☐
☐
☐
☐
☐
☐

(other) BS Mesa Gallup Formation

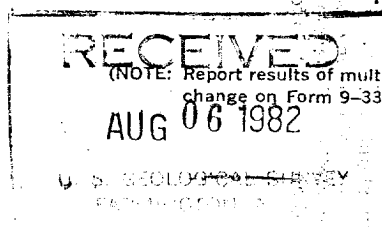

17. DESCRIBE PROPOSED OR COMPLETED OPERATIONS (Clearly state all pertinent details, and give pertinent dates, including estimated date of starting any proposed work. If well is directionally drilled, give subsurface locations and measured and true vertical depths for all markers and zones pertinent to this work.)*

Jicarilla Apache 102 No. 29A sustained irreparable damage during the recent completion operations. A downhole fire while air drilling the drillable bridge plug set at 6150 feet caused the tubing to twist off. After many fishing attempts failed, the fish was milled to 6140 feet leaving six feet of 3-1/8" drill collar, a 5-1/2" casing scraper, and 4-3/4" mill downhole. During fishing operations, the 5-1/2" production casing parted at 6121'. The Gallup will be abandoned by setting a permanent bridge plug at 6100'. Verbal approval was received from Earl Beecher by Gary Munson on 7-30-82.

Subsurface Safety Valve: Manu. and Type _____

Set @ _____

18. I hereby certify that the foregoing is true and correct

SIGNED B.T. Johnson TITLE Admin. Supvr. DATE 8-3-82

(This space for Federal or State office use)

APPROVED BY _____ TITLE _____ DATE _____
CONDITIONS OF APPROVAL, IF ANY:

APPROVED

AUG 10 1982

Elliot
FOR DISTRICT ENGINEER

*See Instructions on Reverse Side

NMOCC