


(SUBMIT IN TRIPLICATE)

Indian Agency Window Rock

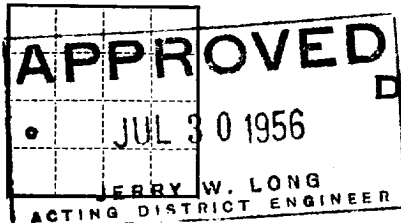

UNITED STATES  
DEPARTMENT OF THE INTERIOR  
GEOLOGICAL SURVEY

Navajo Allotted  
Allottee Joan White  
Lease No. 14-20-603-326

SUNDRY NOTICES AND REPORTS ON WELLS

NOTICE OF INTENTION TO DRILL.....	SUBSEQUENT REPORT OF WATER SHUT-OFF.....	<input checked="" type="checkbox"/>
NOTICE OF INTENTION TO CHANGE PLANS.....	SUBSEQUENT REPORT OF SHOOTING OR ACIDIZING.....	
NOTICE OF INTENTION TO TEST WATER SHUT-OFF.....	SUBSEQUENT REPORT OF ALTERING CASING.....	
NOTICE OF INTENTION TO REDRILL OR REPAIR WELL.....	SUBSEQUENT REPORT OF REDRILLING OR REPAIR.....	
NOTICE OF INTENTION TO SHOOT OR ACIDIZE.....	SUBSEQUENT REPORT OF ABANDONMENT.....	
NOTICE OF INTENTION TO PULL OR ALTER CASING.....	SUPPLEMENTARY WELL HISTORY.....	
NOTICE OF INTENTION TO ABANDON WELL.....		

(INDICATE ABOVE BY CHECK MARK NATURE OF REPORT, NOTICE, OR OTHER DATA)

July 10, 1956, 19

Well No. 2 is located 1900 ft. from N line and 660 ft. from E line of sec. 9

NW/4SW/4 Sec. 9 25-N 12-W NMPM  
(1/4 Sec. and Sec. No.) (Twp.) (Range) (Meridian)  
Bisti Lower Gallup San Juan New Mexico  
(Field) (County or Subdivision) (State or Territory)

The elevation of the derrick floor above sea level is 6209 ft. K.B.

DETAILS OF WORK

(State names of and expected depths to objective sands; show sizes, weights, and lengths of proposed casings; indicate mudding jobs, cementing points, and all other important proposed work)

Spudded 12-1/4" hole 6-4-56 and drilled to 300' & ran 7 jts 8-8/8" OD 21# csg. set @ 298' W/125 sks reg. cement mixed 2% cal. chloride. Cement circ. Pumped plug down to 280' W/max. press. 100#. WOC. Tested W/500# - held OK. Started 7-7/8" hole @ 10:15 p.m. 6-5-56, drilled to 4653' & cored from 4653 to 4705', drilled 7-7/8" hole from 4705 to 4740', cored from 4740' to 4795' & from 4795 to 4853' & from 4853 to 4911'. Drilled 7-7/8" hole from 4911 to 4935'. Ran 152 jts 5-1/2" OD 15.5# csg., set @ 4935' & cemented W/450 sks reg. cement mixed 2% gel. Pumped plug to 4865 @ 4 pm 6-15-56. Max. press. 1000#. WOC. Top of cement outside 5-1/2" OD csg. @ 3040' or 66% fill. Tested casing W/1000# - held OK. Continuing completion operations.

I understand that this plan of work must receive approval in writing by the Geological Survey before operations may be commenced.

Company AMERADA PETROLEUM CORPORATION  
Address Box 535  
Farmington, New Mexico  
By W.G. Smith  
Title Foreman