For 4/160-3 (August 1999)

# UNITED STATES DEPARTMENT OF THE INTERIOR BUREAU OF LAND MANAGEMENT

FORM APPROVED OMB NO. 1004-0136 Expires: November 30, 2000

BUREAU OF LAND MANA	GEMENT		Expires: November 50, 2000
APPLICATION FOR PERMIT TO DE	RILL OR REEATER	5.	Lease Serial No. JIC CONT 95
		1	If Indian, Allotee or Tribe Name
Type of Work X DRILL RE	ENTER 50 2001		Jicarilla Apache
Type of Well Oil Well V Gos Well Other		7	Unit or CA Agreement Name and No
Oil Well Gas Well Other	Single Zone Multipl	e Zone	2) 2 8
Name of Operator		8	Lease Name and Well No.
nergen Resources Corporation		√	Jicarilla 95 #5B
Address	3b. Phone No. (include at	ea code) 9.	API Well No
198 Bloomfield Highway, Farmington, NM 87401	505-325-680	00	30039-2688
Location of Well (Report location clearly and in accordance with a	ny State equirements)*	10.	Field and Pool, or Exploratory
At surface 1975' FSL, 860' FWL		L	Blanco MV, WC/27N3W25#; Manc
1373 132, 330 1112		11.	Sec., T., R., M., or Blk. and Survey or Area
At proposed prod. zone		1	Sec. 25, T27N, R3W, N.M.P.M.
Distance in miles and direction from nearest town or post office*			County or Parish 13. State
	ndnith Now Movico		o Arriba NM
18 Miles Northwest of Li	16. No. of Acres in lease		
Distance from proposed* location to nearest	10. No. of Acres in lease	17.Spacii	ng Unit dedicated to this well
property or lease line, ft. 860'	2560	1200	160 WE12MV, SW/4 Man
(Also to nearest drg. unit line, if any)	2500	3201	GO VICIZALV STYTALL
Distance from proposed location*	19. Proposed Depth	20.BLM	/BIA Bond No. on file
to nearest well, drilling, completed,	·		
applied for, on this lease, ft. 1300'	8101'		
1000	3.70		
Elevations (Show whether DF, KDB, RT, GL, etc.	22. Approximate date work w	vill start*	23. Estimated duration
7303' GL	Dec 2001		14 days
	24. Attachments		
e following, completed in accordance with the requirements of Onsho	ore Oil and Gas Order No. 1, shall be at	tached to this for	rm:
	1		
Well plat certified by a registered surveyor.		operations unless	covered by an existing bond on file (see
A Drilling Plan	Item 20 above).		
A Surface Use Plan (if the location is on National Forest System La			and/or plans as may be required by the
SUPO shall be filed with the appropriate Forest Service Office).	authorized officer.	the information	and of plans as may be required by the
Signuature	Name (Printed/Typed)		Date
Now Araham	Don Graham		9/19/01
	·		<del></del>
ele			
le .			
Production Superintendent			
Production Superintendent	Name (Printed/Typed)		Date
Production Superintendent	Name (Printed/Typed)		DEC 1 9 200
Production Superintendent  proved by (Signautre)  /s/ Brian W. Davis	-		i
Production Superintendent proved by (Signautre) /s/ Brian W. Davis	Name (Printed/Typed) Office		i
Production Superintendent  proved by (Signautre)  /s/ Brian W. Davis	Office		DEC 1 9 200
Production Superintendent  proved by (Signautre)  /s/ Brian W. Davis  le  Letter Cost Fuld Mar  polication approval does not warrant or certify that the applicant hole	Office  Ids legal or equitable title to those riginal contents.	hts in the subjec	DEC 1 9 200
Production Superintendent proved by (Signautre)	Office  Ids legal or equitable title to those riginal contents.	hts in the subjec	DEC 1 9 200

District I PO Box 1980, Hobbs, NM 88241-1980

District II %0 Dnawer DD, Antesia, NM 88211-0719

District III 1000 Rio Brazos Rd., Aztec, NM 87410

District IV PO Box 2088, Santa Fe, NM 87504-2088

State of New Mexico Energy, Minerals & Natural Resources Department


OIL CONSERVATION DIVISION PO Box 2088 Santa Fe, NM 87504-2088

Form C-102 Revised February 21, 1994 Instructions on back Submit to Appropriate District Office State Lease - 4 Copies Fee Lease - 3 Copies

AMENDED REPORT

WELL LOCATION AND ACREAGE DEDICATION PLAT										
'API Number 'Pool Coo				³Pool Name						
30-039-26889 72319-9				Blanco Mesaverde – WC/27N3W251; Mancos (G)			cos (G)			
'Property Code			³Property Name				*Well Number			
do	21289			JICARILLA 95				5B		
i .	OGRID No.			Operator Name				°Elevation		
16292	62928 ENERGEI			N RESOURCES CORPORATION				7303		
					<sup>10</sup> Surface	Location		_		
UL or lot no.	Section	Tawnship	Aange	Lot [an	Feet from the.	North/South line	Feet from the	East/Wes	t line	County
L	25	27N	ЗW		1975	SOUTH	860	WES	5 T	RIO ARRIBA
		11 Bo	ottom	Hole L	ocation I	f Different	From Surf	ace		
Ut or let no.	Section	Township	Fange	Lat Ion	Feet from the	North/South line	Feet from the	East/wes	t line	County
12 Cedicated Acres	<u>!</u>			L	13 Joint or Infill	14 Consolidation Code	<sup>15</sup> Onden No.			
320/160										
NO ALLOWABLE WILL BE ASSIGNED TO THIS COMPLETION UNTIL ALL INTERESTS HAVE BEEN CONSOLIDATED OR A NON-STANDARD UNIT HAS BEEN APPROVED BY THE DIVISION										
78	,	· · · · · · · · · · · · · · · · · · ·	52	78.68	,,,,,,,,,,,,,,,,,,,,,,,,,,,,,,,,,,,,,,,	1	I hereby	y centify the density is	hat the i	FICATION :
	1						Jon Signatur	) Fra	han	2
		- <del></del>		<del>-</del>		1272	Printed			0.5000.01
	:					201	Title	19-01	oahs: I	<u>ntendant</u>
				1	CV.		Date	11-01		

18 SURVEYOR CERTIFICATION 5280.00 I hereby certify that the well location shown on this plat was plotted from field notes of actual surveys made by me or under my supervision, and that the same is true and correct to the best of my belief. Date of Survey: AUGUST 7, 2001 Signature and Seal of Professional Surveyor 860' SON C. EDWARDS W MEXICO AND ESSIONAL 1975 5274.72 15269 Centificate Number

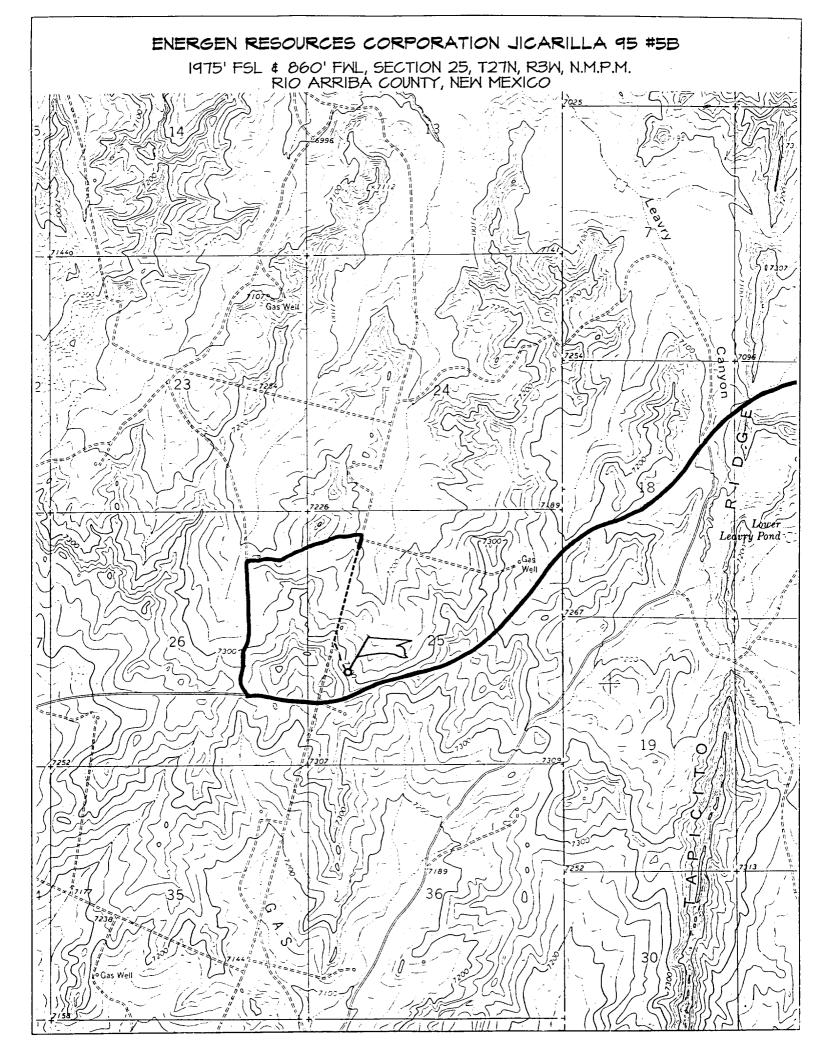

#### **BOP SPECIFICATIONS:**

An 11" 2000 psi minimum double gate BOP stack (Figure 1) will be used following nipple up of casing head. During air drilling operations, a Shaffer Type 50 or equivalent rotating head will be installed on top of the stack. A 2" nominal, 2000 psi minimum choke manifold will be used. An upper Kelly Cock valve with handle available and drill string valve to fit each drill string will be available on the rig floor during drilling operations.

#### **CEMENTING:**

9 5/8 surface casing - Cement with 110 sxs Class B Cement with 1/4" Flocele/sx and 2% calcium chloride (130 cu. ft. of slurry, 100% excess to circulate to surface). WOC 12 hrs. Test casing to 600# for 30 minutes.

Texas Pattern Guide Shoe on bottom with centralizers on the first three joints.

7" intermediate casing - cement with 440 sks 65/35 Class B Poz with 6% gel, 2% calcium chloride, 10% gilsonite, and 1/4# flocele/sk. Tail with 100 sks Class B w/2% calcium chloride, 10% gilsonite and 1/4# flocele/sk. (976 cu. Ft. of slurry, 50% excess to circulate to surface). WOC 12 hrs. If cement does not circulate, run temperature survey in 8 hrs. to determine TOC. Test casing to 1200 psi for 30 minutes.

Cement nose guide shoe on bottom with a self-fill insert float valve on top of shoe joint. 8 bow spring centralizers spaced every 2nd joint off bottom. Two turbolating centralizers at the base of the Ojo Alamo.

#### 4 1/2 Production Liner

Cement with 480 sks 50/50 poz with 2% gel, 5 PPS gilsonite, .4% halad - 9 and 1/4# flocele/sk (605 cu. Ft., 50% excess to intermediate casing). WOC 18 hrs prior to completion.

Cement nose guide shoe on bottom with float collar on top of shoe joint. Liner hanger will have a neopreme packoff on top.

## **OTHER INFORMATION:**

- 1) The Blanco Mesaverde and Gallup Dakota will be completed and downhole commingled.
- 2) No abnormal temperatures or pressures are anticipated.
- 3) Anticipated pore pressure for the Gallup is 900, Mesa Verde is 800, Pictured Cliffs is 500 and the Fruitland 400 psi.
- 4) If lost circulation is encountered, sufficient LCM will be added to the mud system to maintain well control.
- 5) This gas is dedicated.

# **OPERATIONS PLAN**

WELL NAME: Jicarilla 95 #5B

LOCATION: 1975' FSL, 860' FWL, Section 25, T27N, R3W, Rio Arriba, New Mexico FIELD: Blanco MV/WC: 27N3W25L; Mancos ELEVATION: 7303'

### **FORMATION TOPS:**

Surface	San Jose	Huerfanito Benonite	4455
Surface Ojo Alamo	San Jose 145V	Cliff House	5531
Kirtland	3685	Menefee	5795
Fruitland	3780	Point Lookout	6060
Pictured Cliffs	3918	Gallup	7146
Lewis	4125		

Total Depth 8101\_\_\_

# **LOGGING PROGRAM**:

Open Hole Logs:

Surface to intermediate: NONE

Inter TD to total depth: Temp/HRI/CNT, LDT/GR

Mud Logs:

3600' to total depth

Coring:

None

Natural Gauges:

Every 500' from intermediate TD to total depth

<u>MUD PROGRAM</u>: Fresh water low solids mud from surface to intermediate TD (9.0 - 9.2 PPG). Air/mist from intermediate casing point to total depth.

# **CASING PROGRAM:**

<b>HOLE SIZE</b>	<u>DEPTH</u>	CSG SIZE	<u>WT.</u>	<u>GRADE</u>
12-1/4"	200' -	9-5/8"	36#	J-55
8-3/4"	4325'	7" -	20/23#	J-55
6-1/4"	4175'-8101	4-1/2"	11.6#	J-55

# **TUBING PROGRAM:**

7900' 2 3/8 4.7# J-55

WELLHEAD: 11" 3000 x 9 5/8" casing head. 11" 3000 x 7 1/16" 3000 xmas tree.