

UNITED STATES
DEPARTMENT OF THE INTERIOR
GEOLOGICAL SURVEY

SUBMIT IN TRIPLICATE*
(Other instructions on reverse side)

Form approved.
Budget Bureau No. 42-R1424.

5. LEASE DESIGNATION AND SERIAL NO.

SP 079193

6. INDIAN, ALLOTTEE OR TRIBE NAME

7. UNIT AGREEMENT NAME

San Juan 28-6 Unit

8. FARM OR LEASE NAME

San Juan 28-6 Unit

9. WELL NO.

125

10. FIELD AND POOL, OR WILDCAT

Main Dakota

11. SEC., T., R., M., OR BLM. AND
SURVEY OR AREA

Sec. 21, T-28-N, R-6-W

N.M.P.M.

12. COUNTY OR PARISH

San Juan

18. STATE

New Mexico

1. OIL WELL ☐ GAS WELL ☒ OTHER

2. NAME OF OPERATOR

El Paso Natural Gas Company

3. ADDRESS OF OPERATOR

Box 990, Farmington, New Mexico - 87401

4. LOCATION OF WELL (Report location clearly and in accordance with any State requirements.*
See also space 17 below.)
At surface

1740'N, 1190'E

14. PERMIT NO.

15. ELEVATIONS (Show whether DF, RT, GR, etc.)

6456' GL

16. Check Appropriate Box To Indicate Nature of Notice, Report, or Other Data

NOTICE OF INTENTION TO:

TEST WATER SHUT-OFF

FRACTURE TREAT

SHOOT OR ACIDIZE

REPAIR WELL

(Other)

PULL OR ALTER CASING

MULTIPLE COMPLETE

ABANDON*

CHANGE PLANS

SUBSEQUENT REPORT OF

WATER SHUT-OFF

FRACTURE TREATMENT

SHOOTING OR ACIDIZING

(Other)

REPAIRING WELL

ALTERING CASING

ABANDONMENT*



(NOTE: Report results of multiple completion on Well Completion or Recompletion Report and Log form.)

17. DESCRIBE PROPOSED OR COMPLETED OPERATIONS (Clearly state all pertinent details, and give pertinent dates, including estimated date of starting any proposed work. If well is directionally drilled, give subsurface locations and measured and true vertical depths for all markers and zones pertinent to this work.)*

On 8-14-67 spudded well, drilled surface hole and ran 10 joints 9 5/8", 12.365", NEX H-40 casing (330') set at 342' w/270 sacks cement circulated to surface. W.O.C. 12 hours, tested w/600#/30 Min. O. K.

On 9-2-67 T. D. 7819'. Ran 242 joints 4 1/2", 11.6# & 10.5#, J-55 casing (7808') set at 7819'. Float collar at 7805', second stage tool at 5695', third stage tool at 3503'. Cemented first stage w/290 sacks of cement, second stage w/190 sacks, third stage w/240 sacks. W.O.C. 18 hours.

On 9-3-67 P.B.T.D. 7805', tested casing w/4000# O. K. Spotted 300 gal. 7 1/2% HCL. Perf. 7530-42', 7585-97', 7636-48', 7710-34' w/24 SPZ. Frac w/60,000# 40/60 sand, 63,500 gal. water. Max. pr. 4000#, BDP 2000#, tr. pr. 3250-3540-3800#. I.R. 42 BPM. Dropped 3 sets of 24 balls each, pumped w/5300 gal. water. ISB 1800#, 5 min. 1600#.

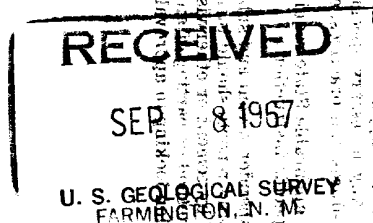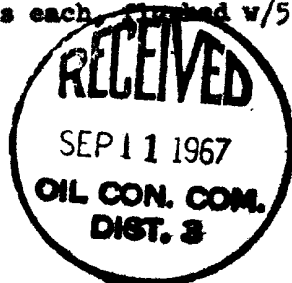

18. I hereby certify that the foregoing is true and correct

SIGNED Original Signed F. H. WOOD

TITLE Petroleum Engineer

DATE 9-7-67

(This space for Federal or State office use)

APPROVED BY
CONDITIONS OF APPROVAL, IF ANY:

TITLE

DATE

Instructions

General: This form is designed for submitting proposals to perform certain well operations, and reports of such operations when completed, as indicated, on Federal and Indian lands pursuant to applicable Federal law and regulations, and, if approved or accepted by any State, on all lands in such State, pursuant to applicable State law and regulations. Any necessary special instructions concerning the use of this form and the number of copies to be submitted, particularly with regard to local, area, or regional procedures and practices, either are shown below or will be issued by, or may be obtained from, the local Federal and/or State office.

Item 4: If there are no applicable State requirements, locations on Federal or Indian land should be described in accordance with Federal requirements. Consult local State or Federal office for specific instructions.

Item 17: Proposals to abandon a well and subsequent reports of abandonment should include such special information as is required by local Federal and/or State offices. In addition, such proposals and reports should include reasons for the abandonment; data on any former or present productive zones, or other zones with present significant fluid contents not sealed off by cement or otherwise; depths (top and bottom) and method of placement of cement plugs; mud or other material placed below, between and above plugs; amount, size, method of parting of any casing, liner or tubing pulled and the depth to top of any left in the hole; method of closing top of well; and date well site conditioned for final inspection looking to approval of the abandonment.

U.S. GOVERNMENT PRINTING OFFICE: 1963 O-485229

10-70-101

