SUBMIT IN TRIPLICATE*

Form approved. Budget Bureau No. 42-R1425.

(Other instructions on reverse side)

30-039-22239 5. LEASE DESIGNATION AND SERIAL NO.

UNITE	ED S	STATI	ES
DEPARTMENT	OF	THE	INTERIOR

GEOLOGICAL SURVEY						SF 078417
APPLICATION FOR PERMIT TO DRILL, DEEPEN, OR PLUG BACK						6. IF INDIAN, ALLOTTER OR TRIBE NAME
1a. TYPE OF WORK	11.1	DEEDEN		DI LIC DA		7. UNIT AGREEMENT NAME
b. TYPE OF WELL	ILL &	DEEPEN		PLUG BA	~K []	San Juan 28-7 Unit
OIL G	AS OTHER			INGLE MULTIP	LE X	8. FARM OR LEASE NAME
2. NAME OF OPERATOR			•			San Juan 28-7 Unit
	cural Gas Co	mpany				9. WELL NO.
3. ADDRESS OF OPERATOR		0740			-	12A (PM)
PO BOX 289	Farmington			State requirements *)		Blanco Pic Cliffs Ext.
At surface	-			,	-	Blanco Mesa Verde
At proposed prod. zor	880'N, 17	30.M				AND SURVEY OR ABEA
	same				1	Sec.17,T-28-N,R-7-W
14. DISTANCE IN MILES	AND DIRECTION FROM N	EAREST TOWN OR POS	T OFFIC	E 3		12. COUNTY OR PARISE 13. STATE
11 miles We	est of Gober	nador Camp	NI NI	М		Rio Arriba NM
LOCATION TO NEARES' PROPERTY OR LEASE 1	r		16. No	O. OF ACRES IN LEASE	17. NO. OF	ACRES ASSIGNED IS WELL
(Also to nearest dri	g. unit line, if any)	880'	10 pr	unit ROPOSED DEPTH	160	X OR CABLE TOOLS
TO NEAREST WELL, D OR APPLIED FOR, ON TH	RILLING, COMPLETED,	3700	1		L	
21. ELEVATIONS (Show wh		1700 '	<u> </u>	<u>5925'</u>	Rotary	22. APPROX. DATE WORK WILL START*
6627'GL						
23.		PROPOSED CASI	NG ANI	CEMENTING PROGRA	M	
SIZE OF HOLE	SIZE OF CASING	WEIGHT PER F	00Т	SETTING DEPTH	1	QUANTITY OF CEMENT
13 3/4"	9 5/8"	36.0#		200'	224 0	1.ft. to circulate
8 3/4"	7"	20.0#				i.ft.to cover Ojo Al amo
6 1/4"	4 1/2"lin	er 10.5#	!			.ft.to circ.liner
Mesa Verde A 3000 psi	formation. WP and 6000	psi test	doul	ole gate prev	enter	equipped with
This gas is	dedicated.					EIVE
IN ABOVE SPACE DESCRIBE	PROPOSED PROGRAM: I drill or deepen directio	f proposal is to deep	en or p			ctive zone and proposed new productive and true vertical depths. Ave blowout
81GNED LOC	y Skaa,	Lela TH	LE	Drilling	_Clerk	DAY 79 79
(This space for Fede	ral or State office use)			APPROVAL DATE		
APPROVED BY	AT VD ANV	тіт	'LE			NOV 6 1979
CONDITIONS OF APPROV	AL, IF ANY;					DIST. 3

*See Instructions On Reverse Side

of Freh

STATE OF NEW MEXICO ENERGY AND MINERALS DEPARTMENT

OIL CONSERVATION DIVISION P. O. BOX 2088

1980 Form C-107 Revised 10-1-78

SANTA FE, NEW MEXICO 87501

All distances must be from the cuter houndaries of the Section.

Operator			Lease			Well No.			
EL PASO NA	TURAL GAS COM	PANY	SAN JUAN 2	8-7 UNIT (SF	-078417)	12-A			
Unit Letter	Section	Township .	Range	County	·	<u> </u>			
С	17	28N	7W	Rio A	lrriba				
Actual Footage Loc	ation of Well:	ļ. <u>.</u>	· · · · · · · · · · · · · · · · · · ·						
880	feet from the No	rth line and	1730	feet from the	West	line			
Ground Level Elev.		mation MESA VERDE	l .	C MESA VERDE		ated Acreage:			
6627	PICTU	RED CLIFFS	BLANCO PICT	URED CLIFFS I	EXT. 160	.0 & 320.0 Acres			
2. If more th	-	dedicated to the wel	•		•		,		
	3. If more than one lease of different ownership is dedicated to the well, have the interests of all owners been consolidated by communitization, unitization, force-pooling. etc?								
Yes	☐ No If ar	iswer is "yes;" type o	of consolidation _	- Uniti:	zation -		-		
this form i No allowat	f necessary.) le will be assigne	ed to the well until al	interests have b	een consolidated	(by communit	ization, unitization,			
Ŷ ŢŶĸĸĸĸĸ	XXXXXXXXX	SEXXXXXX	!		CER	TIFICATION			
1730'	880'		1		tained herein is	that the information con- true and complete to the ledge and belief.			
W	- -	_\			Nome				
(X)	,	821	, 1		Drilling (Clerk			
<i>t</i> t	1		1	6 1	Position	tural Cag Co			
XX	i	KB	; 1		EL PASO Na Compony	atural Gas Co	<u>•</u>		
XX SI	; -078417		i		October 18	3, 1979			
∕ 1X)		ec.	1	STORES AND	Date				
			1						
#12	2 0 1	17			shown on this pl notes of actual under my superv	r that the well location lat was plotted from field surveys made by me or ision, and that the same rect to the best of my elief.	r		
K	ļ i	K	1 1979	'.	Date Surveyed	VEC 130%			
K	İ	K	1		August 3	1979			
	l I	î K	1, 0 97 69		Registered Profess and/or Land Surve				
K	į		!		Fred B. Ke	Kolina or Jr.			
$\triangle \triangle \triangle \triangle \triangle$					Certificate No.	Tar, West			
0 230 660		0 2310 2640 2000	1500 1000	500 0	3950				



Applications and the control of the

P. O. BOX 990 FARMINGTON, NEW MEXICO 87401 PHONE: 505-325-2841

Multi-Point Surface Use Plan

San Juan 28-7 Unit #12A

- 1. Existing Road Please refer to Map No. 1 which shows the existing roads. New roads which will be required have been marked on this map. All existing and new roads will be properly maintained during the duration of this project.
- 2. Planned Access Roads Please refer to Map No. 1. The grade of the access roads will be consistent with that of the local terrain. The road surface will not exceed twenty feet (20') in width. Upon completion of the project, the access road will be adequately drained to control soil erosion. Drainage facilities may include ditches, water bars, culverts or any other measure deemed necessary by trained Company personnel to insure proper drainage. Gates and/or cattleguards will be installed if necessary.
- Location of Existing Wells Please refer to Map No. 2.
- 4. Location of Tank Batteries, Production Facilities, and Production
 Gathering and Service Lines Please refer to Maps No. 1 and No. 2.

 Map No. 2 shows the existing gas gathering
 lines. Map No. 1 shows the existing roads and
 new proposed access roads. All known production
 facilities are shown on these two maps.
- 5. Location and Type of Water Supply Water for the proposed project will be obtained from Manzaneras Water Well.
- 6. Source of Construction Materials No additional materials will be required to build either the access road or the proposed location.
- 7. Methods of Handling Waste Materials All garbage and trash materials will be put into a burn pit shown on the attached Location Plat No. 1. When clean-up operations are begun on the proposed project, the burn pit with its refuse will be buried to a depth of at least three feet (3'). A latrine, the location of which is also shown on Plat No. 1,

7. cont'd.

- will be provided for human waste. If large amounts of liquids are left in the reserve pit after completion of the project, the pit will be fenced until the liquids have had adequate time to dry. The location clean-up will not take place until such time as the reserve pit can be properly covered over to prevent run-off from carrying any of these materials into the watershed. No earthen pit will be located on natural drainages; all earthen pits will be so constructed as to prevent leakage from occurring.
- 8. Ancillary Facilities No camps or airstrips will be associated with this project.
- 9. Wellsite Layout Please refer to the attached Plat No. 1.
- 10. Plans for Restoration of the Surface After completion of the proposed project, the location will be cleaned and leveled. The location will be left in such a condition that will enable reseeding operations to be carried out. Seed mixture as designated by the responsible government agency will be used. The reseeding operation will be performed during the time period set forth by the regulatory body. The location production equipment will be painted as designated by the responsible government agency.
- 11. Other Information The terrain is chained bench with sagebrush, pinon and cedar growing. Deer are occasionally seen on the proposed project site.
- 12. Operator's Representative W.D. Dawson, PO Box 990, Farmington, NM
- 13. Certification -

I hereby certify that I, or persons under my direct supervision, have inspected the proposed drillsite and access route; that I am familiar with the conditions which presently exist; that the statements made in this plan are, to the best of my knowledge, true and correct; and that the work associated with the operations proposed herein will be performed by El Paso Natural Gas Company and its contractors and sub-contractors in conformity with this plan and the terms and conditions under which it is approved.

L. A. Aimes

Project Drilling Engineer

EIVE

02 **1979**.

DH JAZA

Operations Plan San Juan 28-7 Unit #12A

I. Location: 880'N, 1730'W, Section 17, T-28-N, R-7-W, Rio Arriba County, NM

Field: Blanco PC & Blanco MV Elevation: 6627'GR

II. Geology:

Α.	Formation Tops:	Surface	San	Jose	Lewis	3410'
		Ojo Alamo		2360'	Mesa Verde	4905 '
		Kirtland		2470'	Menefee	5045 '
		Fruitland		2965'	Point Lookout	54 7 5'
		Pic.Cliffs		32851	Total Depth	59251

B. Logging Program: I-ES and GR-Density at 3610'

GR-Ind. and GR-Density at Total Depth.

C. Coring Program: none

D. Natural Gauges: 4895', 5035', 5465' and at Total Depth.
Also gauge any noticeable increase in gas. Record all gauges in daily drilling report and on morning report.

III. Drilling:

A. Mud Program: mud from surface to 3610'. Gas from intermediate casing to Total Depth.

IV. Materials:

A .	Casing	Program:	Hole Size	Depth	Casing Size	Wt.&Grade
			13 3/4"	200'	9 5/8"	36.0# K-55
			8 3/4"	3610'	7"	20.0# K-55
			6 1/4"	3460-59251	4 1/2"	10.5# K-55

B. Float Equipment: 9 5/8" surface casing - cement quide shoe.

7" intermediate casing - cement guide shoe and self-fill insert float valve, 5 stabilizers every other joint above shoe. Run float two joints above shoe.

- 4 1/2" liner 4 1/2" liner hanger with neoprene packoff & PBR. Geyser shoe and flapper type float collar
- C. Tubing: 5925' of 2 3/8", 4.7#, J-55 8rd EUE tubing with a common pump seating nipple one joint above bottom. Tubing will be open ended.

 3460' of 1 1/4", 2.33#, J-55 IJ tubing with a common pump seating nipple above a perforated joint plugged on bottom. Isolate producing formations with a packer.
- D. Wellhead Equipment: 10" 900 x 9 5/8" casing head. 10" x 7" casing hanger, 10" 2000 x 6" 2000 dual tubing head.




· The W


V. Cementing:

9 5/8" surface casing - use 190 sks. of Class "B" cement with 1/4# gel-flake per sack and 3% calcium chloride (224 cu.ft. of slurry, 100% excess to circulate to surface). WOC 12 hours. Test casing to 600#/30 minutes.


7" intermediate casing - use 101 sks. of 65/35 Class "B" Poz with 6% gel and 2% calcium chloride (8.3 gallons of water per sack) followed by 100 sks. of Class "B" with 2% calcium chloride (282 cu.ft. of slurry, 50% excess to cover Ojo Alamo). Run temperature survey at 8 hours. WOC 12 hours. Test casing to 1200#/30 minutes.

4 1/2" liner - precede cement with 20 barrels of gel water (2 sks. gel) Cement with 309 sks. of 50/50 Class "B" Poz with 2% gel, 0.6% Halad-9, 6.25# gilsonite plus 1/4# Flocele per sack (430 cu.ft. of slurry, 70% excess to circulate liner). WOC 18 hours.

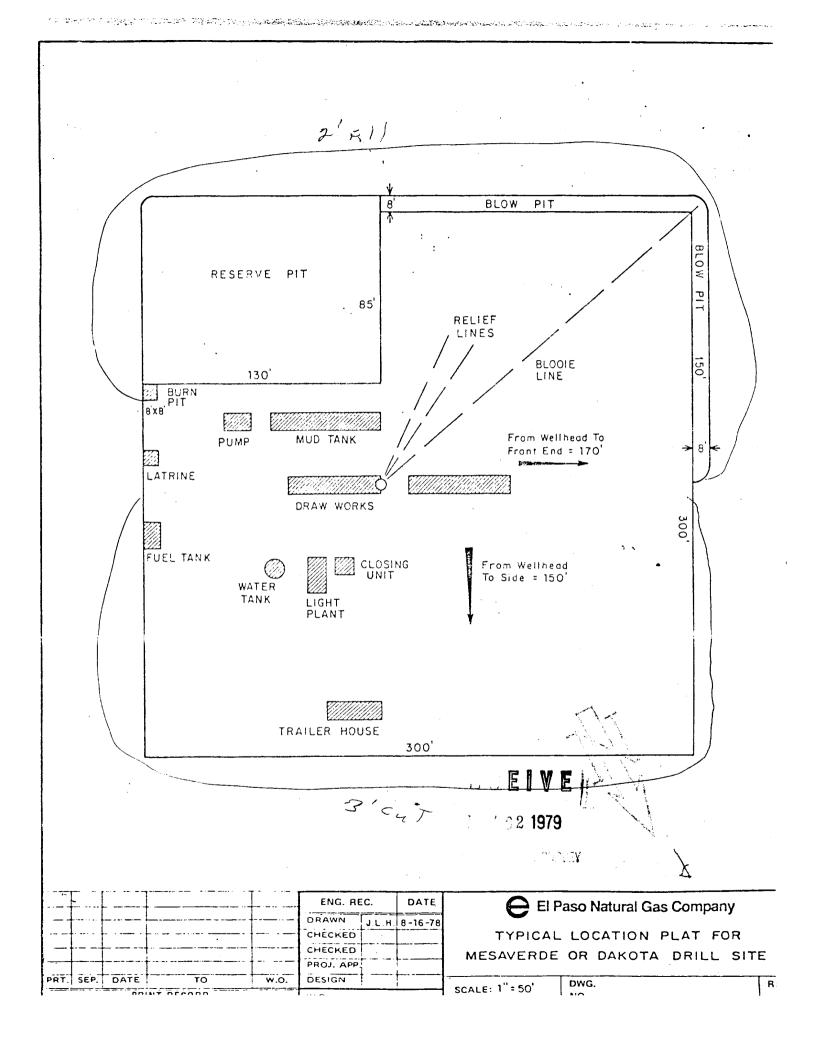

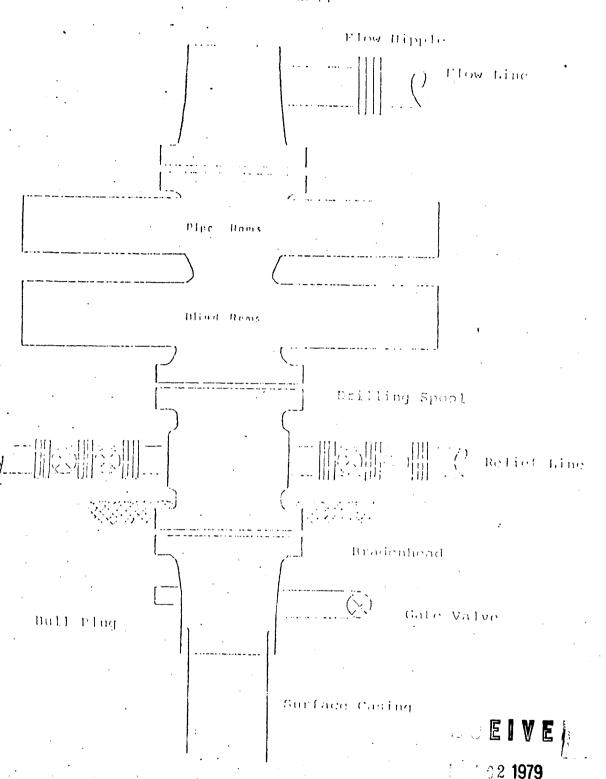

Series 900 Double Gate BOP, rated at 3000 psi Working Pressure
When gas drilling operations begin a Shaffer type 50 or equivalent rotating head is installed on top of the flow nipple and the flow line is converted into a blowie line.

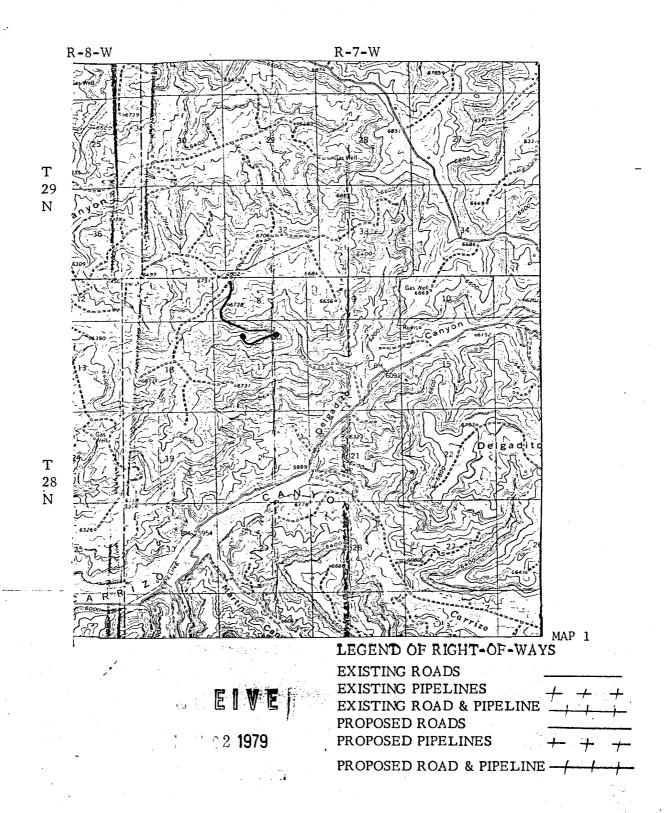

El Paso Natural Gas Company San Juan 28-7 Unit #12A NW 17-28-7

R -7-W EPNG EPNG 17 13 19 199 20 an Juan 28 E.PNG. 28 36

MAP 2

EIVE

Proposed Location

2 1979

المنتوا والمناسبة

1404 F LA

UNITED STATES DEPARTMENT OF THE INTERIOR


5.	LEA	SE	
	SF	07841	7

GEOLOGICAL SURVEY	6. IF INDIAN, ALLOTTEE OR TRIBE NAME			
SUNDRY NOTICES AND REPORTS ON WELLS (Do not use this form for proposals to drill or to deepen or plug back to a different reservoir. Use Form 9–331–C for such proposals.)	7. UNIT AGREEMENT NAME San Juan 28-7 Unit			
1. oil gas well well to other	8. FARM OR LEASE NAME San Juan 28-7 Unit			
2. NAME OF OPERATOR	9. WELL NO.			
El Paso Natural Gas Company	12A (PM) 10. FIELD OR WILDCAT NAME			
3. ADDRESS OF OPERATOR	Blanco PC Ext. & Blanco MV			
Box 289, Farmington, New Mexico 87401	11. SEC., T., R., M., OR BLK. AND SURVEY OR			
 LOCATION OF WELL (REPORT LOCATION CLEARLY. See space 17 below.) 	AREA Sec. 17, T-28-N, R-7-W			
AT SURFACE: 880'N, 1730'W AT TOP PROD. INTERVAL:	N. M. P. M. 12. COUNTY OR PARISH 13. STATE			
AT TOTAL DEPTH:	Rio Arriba New Mexico 14. API NO.			
16. CHECK APPROPRIATE BOX TO INDICATE NATURE OF NOTICE,	AT. ALL NO.			
REPORT, OR OTHER DATA	15. ELEVATIONS (SHOW DF, KDB, AND WD)			
REQUEST FOR APPROVAL TO: SUBSEQUENT REPORT OF:	.6627! GI.			
TEST WATER SHUT-OFF				
FRACTURE TREAT	(NOTE: Report results of multiple completion or zone change on Form 9-330.)			
MULTIPLE COMPLETE	change on Form 5-330.)			
CHANGE ZONES				
(other)				
 17. DESCRIBE PROPOSED OR COMPLETED OPERATIONS (Clearly state including estimated date of starting any proposed work. If well is directly measured and true vertical depths for all markers and zones pertinent 1-80: Spudded well. Drilled surface hole. Ran 5 j casing 217' set at 229'. Cemented w/ 224 cu. f surface. WOC 12 hours; held 600#/30 minutes. 	rectionally drilled, give subsurface locations and to this work.)* oints 9 5/8", 40#, K surface			
Subsurface Safety Valve: Manu. and Type	Sel Sel Ft.			
18. I hereby certify that the foregoing is true and correct				
$\mathcal{M} = \mathcal{M} = \mathcal{M} = \mathcal{M}$	k date May 13, 1980			
(This space for Federal or State offic	e use)			
APPROVED BY TITLE TITLE	DATE ACCEPTED FOR RECORD			

MAY 16 1980

*See Instructions on Reverse Side





REPAIR WELL

PULL OR ALTER CASING

MULTIPLE COMPLETE CHANGE ZONES ABANDON* (other)

(NOTE: Report results of multiple completion or zone

change on Form 9-330.)

DEPARTMENT OF THE INTERIOR GEOLOGICAL SURVEY	5. LEASE SF 078417 6. IF INDIAN, ALLOTTEE OR TRIBE NAME
SUNDRY NOTICES AND REPORTS ON WELLS (Do not use this form for proposals to drill or to deepen or plug back to a different reservoir. Use Form 9–331–C for such proposals.) 1. oil gas gas	7. UNIT AGREEMENT NAME San Juan 28-7 Unit 8. FARM OR LEASE NAME San Juan 28-7 Unit
well well dother	9. WELL NO.
2. NAME OF OPERATOR El Paso Natural Gas Company 3. ADDRESS OF OPERATOR Box 289, Farmington, New Mexico 4. LOCATION OF WELL (REPORT LOCATION CLEARLY. See space 17 below.) 880'N, 1730'W	12A (PM) 10. FIELD OR WILDCAT NAME Blanco PC Ext. & Blanco MV 11. SEC., T., R., M., OR BLK. AND SURVEY OR AREA Sec. 17, T-28-N, R-7-W N.M.P.M.
AT SURFACE: AT TOP PROD. INTERVAL: AT TOTAL DEPTH:	12. COUNTY OR PARISH 13. STATE Rio Arriba New Mexico 14. API NO.
16. CHECK APPROPRIATE BOX TO INDICATE NATURE OF NOTICE, REPORT, OR OTHER DATA	15. ELEVATIONS (SHOW DF, KDB, AND WD)
REQUEST FOR APPROVAL TO: SUBSEQUENT REPORT OF: TEST WATER SHUT-OFF	6627' GL

17. DESCRIBE PROPOSED OR COMPLETED OPERATIONS (Clearly state all pertinent details, and give pertinent dates, including estimated date of starting any proposed work. If well is directionally drilled, give subsurface locations and measured and true vertical depths for all markers and zones pertinent to this work.)*

5-17-80: TD 3621'. Ran 84 joints 7", 20#, K-55 intermediate casing 3610' set at 3621' Cemented w/282 cu. ft. cement. WOC 12 hours; held 1200#/30 minutes. Top of cement 2200'.

5-20-80: TD 5937' Ran 61 joints 4 1/2", 10.5#, K-55 casing liner 2478' set 3459 Float collar set at 5919'. Cemented w/ 398 cu. ft. cement. WOC 1

APPROVED BY CONDITIONS OF APPROVAL, IF ANY:		TITLE		DATE _	AGGEPTED FOR RECORD	
	(This space fo	or Federal or State office us	e)		_
SIGNED	Dieses	TITLE	Drilling Clerk	_ DATE	May 22, 1980	
18. I hereby certify that the	foregoing is tru	e and correc	et			
Subsurface Safety Valve: Ma	nu. and Type $_$				Set @ OIV	Ft.

MAY 28 1980

FARMINGTON DISTRICT BY ML Xuchera