#### SUBMIT IN TRIPLICATE\*

Form approved. Budget Bureau No. 42-R1425.

(Other instructions on reverse side)

# **UNITED STATES**

DEPARTMENT OF THE INTERIOR					30-039-2235-9 5. LEASE DESIGNATION AND SERIAL NO.		
A DDI IC A TIC		OGICAL SUF					SF 078497
1a. TYPE OF WORK	ON FOR PERMIT	TO DRILL	, DEE	PEN, OR P	LUG BA	CK	6. IF INDIAN, ALLOTTEE OR TRIBE NAME
DI	RILL 🗵	DEEPEN		PLI	JG BACK		7. UNIT AGREEMENT NAME
b. TYPE OF WELL	GAS 🖂						San Juan 28-7 Unit
2. NAME OF OPERATOR	WELL X OTHER			SINGLE X	MULTIPLE		8. FARM OR LEASE NAME
El Paso Na	atural Gas Co	mpanv			/ ;	7	San Juan 28-7 Unit
		1		ECEIV	(EL)	<del></del>	242E
PO BOX 289	), Farmingtor Report location clearly as	, NM 87	401	MAY - 1-1-	249.		10. FIELD AND POOL, OR WILDCAT
At surface	900's, 80	O 17.7	with any	State requiremen	ts:+)		Basin Dakota
At proposed prod. zo		· · · ·	U. S. GEOLOGICAL SURVEY			11. SEC., T., R., M., OR BLK. AND SURVEY OR AREA	
14 DISTANCE IN MILES	same			ARMINGTON, I	N. M.		Sec.7,T-28-N,R-7-W
6 miles so	and direction from NE	AREST TOWN OR PO	OST OFFIC	r.			12. COUNTY OR PARISH   13. STATE
15. DISTANCE FROM PROP LOCATION TO NEARES	ORED*	o city,		O. OF ACRES IN I	79.4 (27)		Rio Arriba NM
PROPERTY OR LEASE (Also to nearest dr)	LINE, FT. R. Unit line, if any)	200		%S% <del>-Unit</del>	LASE 1	TO TH	F ACRES ASSIGNED IS WELL
18. DISTANCE FROM PROP TO NEAREST WELL, I	POSED LOCATION*		_1	ROPOSED DEPTH	20	). ROTAR	331.71 331.11 Y OR CABLE TOOLS
OR APPLIED FOR, ON THE	IIS LEASE, FT.	300'		7570		otar	
6416'GL	ether DF, RT, GR, etc.)		_			:	22. APPROX. DATE WORK WILL START*
23.		PROPOSED GAS					
SIZE OF HOLE	SIZE OF CASING	PROPOSED CAS				•	
13 3/4"	9.5/8"	WEIGHT PER		SETTING DE			QUANTITY OF CEMENT
8 3/4"	7"	36.0# 20.0#		200 3360		<u>24 c</u>	u.ft. to circulate
6 1/4"	4 1/2"	10.5#&11		7570		<u>79 с</u> 48 с	u.ft.to cover Ojo Alamo
	l	1	"	, , , ,	10	• • •	u.ft.to fill to interm.
Selectivel	y perforate a	and sandw	ater	fractur	o ∔ha T		ta formation.
	- ·		u cci	TIACCUI	e che i	јако	ta formation.
7 3000 pg	MD - I coop					- 1	
blind and	wP and 6000 nine rame wi	psi test	dou.	ble gate	prever	nter	equipped with
	Pipe rams wi.	rr be use	u Io	r blow or	it prev	ent:	equipped with ion on this val
This gas is	s dedicated.						
						· .	MAY 23 1000
Lots 2,3,4	,5 SESW/4 and	l Los 1.2	.3. 1	JENW/4 c	ENIM / A	of c	016 000 1880
acarcated (	-o curs werr.						Transfer 1
IN ABOVE SPACE DESCRIBE zone. If proposal is to d preventer program, if any.	PROPOSED PROGRAM: If p rill or deepen directional	roposal is to deep ly, give pertinent	en or pla data on	ug back, give dat subsurface locat	a on present ions and mea	product asured a	ive zone and proposed new productive and true vertical depths. Cive browout
24.	1 0.						
SIGNED /	Dusco	TIT	LE	Drill	ing Cl	erk	DATE MOST 2 1000
(This space for Federa	al or State office use)		<del></del>				- Pars - Play - C , 1980
PERMIT NO.	· · · · · · · · · · · · · · · · · · ·			PDBOUAT NA		*	
			^	PPROVAL DATE		· .	
APPROVED BYCONDITIONS OF APPROVAL	, IF ANY:	TITI	LIC				A DATE
	· · · · · · · · · · · · · · · · · · ·						1 - 1 - 1 - 1 - 1 - 1 - 1 - 1 - 1 - 1 -
70.000 0 46							MAY 21 1980

Hell Cloyforting of Frak

\*See Instructions On Reverse Side

MMOCC

# NEW MEXICO OIL CONSERVATION COMMISSION WELL LOCATION AND ACREAGE DEDICATION PLAT

		All distances must be	from the outer boundaries of	the Section.	
0			Lease		Well No.
Operator  DI DISO NI	ATURAL GAS COM	PANY	SAN JUAN 28-7	UNIT (SF-0781	97) 242-F
	Section	Township	Range	County	
Unit Letter	7	28N	7W	Rio Arriba	
Actual Footage Lo		<u> </u>			
900	feet from the	South line and	800 fee	t from the West	line
Ground Level Elev			Pool		Dedicated Acreage:
6415	Dakota		Basin Dakota		331.71 331.11 Acres
01113			vell by colored pencil	or hachure marks on	the plat below.
2. If more interest a	than one lease is and royalty).	dedicated to the we	ll, outline each and ide	entify the ownership	thereof (both as to working of all owners been consoli-
3. It more the dated by	communitization,	unitization, force-pool	of consolidation		
If answer	r is "no;" list the if necessary.)	owners and tract des	criptions which have a	ctually been consol	ommunitization, unitization, en approved by the Commis-
		DETAGLED EO GIO	W MOVED LOCATION.	4-16-80	CERTIFICATION ·
NOT   -   -   -     -	SF-0784 77  SF-0784 77	18		I here tained best of  Nori  Pashior  Chiay  Date  I here show notes under is tr	by certify that the information confidence in its true and complete to the famy knowledge and belief.  Ling Clerk  Paso Natural Gas Co.  2, 1980  by certify that the well location in on this plat was platted from field of actual surveys made by me or my supervision, and that the same we and correct to the best of my ledge and belief.
Scale:	1"=2000'	i	3	Ma.	rch 28, 1980 prod Fratessional Engineer Land Surveyor 2, 1990
Dedica	tion Acreage:	Sec. 7 (Lots 2-	-3-4-5, SE/SW≟)	l -	ed B. Kery Jr.
		Sec. 18(1.018 1-	.o_q. ne/nwł. se/n	₩ <del>1</del> ) <u>139</u>	50

## EIPEED COMPANY

Progression FARMOUTERS, NEWSON (CONTRACT PROPERMONERAL

Well Name San Duan 28-7 Unit 2.	42 E
Location SW1 28.7	· · ·
Formation DK	
•	
We, the undersigned, have inspected this location	and road.
U. S. Forest Service	Date
	•
Archaeologist / Ford	3/25/80
	Date
Bureau of Indian Affairs Representative	Date
Bureau of Land Management Representative	3/26/80 Date
Barbara J Contur U. S. Geological Survey Representative - AGREES	3/26/80 Date 3/25/80 Date
TO THE FOOTAGE LOCATION OF THIS WELL.	Date
REASON: Seed Mixture:	
Equipment Color: BRown	
Road and Row: (Same) or (Separate) Pipline In	ped 166
Remarks: RDAD 600	

C.C. to Dave Vilvin Earl Mealer John Ahlm





#### Multi-Point Surface Use Plan San Juan 28-7 Unit #242E

- 1. Existing Road Please refer to Map No. 1 which shows the existing roads. New roads which will be required have been marked on this map.

  All existing and new roads will be properly maintained during the duration of this project.
- 2. Planned Access Roads Please refer to Map No. 1. The grade of the access roads will be consistent with that of the local terrain. The road surface will not exceed twenty feet (20') in width. Upon completion of the project, the access road will be adequately drained to control soil erosion. Drainage facilities may include ditches, water bars, culverts or any other measure deemed necessary by trained Company personnel to insure proper drainage. Gates and/or cattleguards will be installed if necessary.
- 3. Location of Existing Wells Please refer to Map No. 2.
- 4. Location of Tank Batteries, Production Facilities, and Production
  Gathering and Service Lines Please refer to Maps No. 1 and No. 2.

  Map No. 2 shows the existing gas gathering
  lines. Map No. 1 shows the existing roads and
  new proposed access roads. All known production
  facilities are shown on these two maps.
- 5. Location and Type of Water Supply Water for the proposed project will be obtained from Manzaneras Mesa Water Well.
- 6. Source of Construction Materials No additional materials will be required to build either the access road or the proposed location.
- 7. Methods of Handling Waste Materials All garbage and trash materials will be put into a burn pit shown on the attached Location Plat No. 1. When clean-up operations are begun on the proposed project, the burn pit with its refuse will be buried to a depth of at least three feet (3'). A latrine, the location of which is also shown on Plat No. 1,

7. cont'd.

will be provided for human waste. If large amounts of liquids are left in the reserve pit after completion of the project, the pit will be fenced until the liquids have had adequate time to dry. The location clean-up will not take place until such time as the reserve pit can be properly covered over to prevent run-off from carrying any of these materials into the watershed. No earthen pit will be located on natural drainages; all earthen pits will be so constructed as to prevent leakage from occurring.

- 8. Ancillary Facilities No camps or airstrips will be associated with this project.
- 9. Wellsite Layout Please refer to the attached Plat No. 1.
- 10. Plans for Restoration of the Surface After completion of the proposed project, the location will be cleaned and leveled. The location will be left in such a condition that will enable reseeding operations to be carried out. Seed mixture as designated by the responsible government agency will be used. The reseeding operation will be performed during the time period set forth by the regulatory body. The location production equipment will be painted as designated by the responsible government agency.
- 11. Other Information The terrain is rolling hills with sagebrush, pinon and juniper growing. Cattle and deer are seen occasionally on the proposed project site.
- 12. Operator's Representative W.D. Dawson, PO Box 990, Farmington, NM
- 13. Certification -

I hereby certify that I, or persons under my direct supervision, have inspected the proposed drillsite and access route; that I am familiar with the conditions which presently exist; that the statements made in this plan are, to the best of my knowledge, true and correct; and that the work associated with the operations proposed herein will be performed by El Paso Natural Gas Company and its contractors and sub-contractors in conformity with this plan and the terms and conditions under which it is approved.

D. R. Read

Project Drilling Engineer

## Operations Plan San Juan 28-7 Unit #242E

I. Location: 900'S, 800'W, Section 7, T-28-N, R-7-W, Rio Arriba County, NM

Field: Basin Dakota Elevation: 6416'GL

#### II. Geology:

Α.	Formation	Tops:	Surface	San Jose	Menefee	4760'
			Ojo Alamo	2120'	Point Lookout	5260'
			Kirtland	2192'	Gallup	6350 <b>'</b>
			Fruitland	2755'	Greenhorn	7222'
			Pic.Cliffs	3025 <b>'</b>	Graneros	7281'
			Lewis	3157 <b>'</b>	Dakota	7422'
			Mesa Verde	4680'	Total Depth	7570 <b>'</b>

- B. Logging Program: GR-Ind. and GR-Density at Total Depth.
- C. Coring Program: none
- D. Natural Gauges: 4670', 4750', 5250', 6340', 7210', 7270', 7410' and at Total Depth. Also gauge any noticeable increase in gas. Record all gauges in daily drilling report and on morning report.

#### III. Drilling:

A. Mud Program: mud from surface to 3360'Gas from intermediate casing to Total Depth.


#### IV. Materials:

A. Casing Program:	Hole Size	Depth	Casing Size	Wt.&Grade
	13 3/4" 8 3/4"	200' 3360'	9 5/8" 7"	36.0# K-55 20.0# K-55
	6 1/4"	6500'	4 1/2"	10.5# K-55
	6 1/4"	7570 <b>'</b>	4 1/2"	11.6# K-55


- B. Float Equipment: 9 5/8" surface casing Pathfinder Texas Pattern guide shoe (Part No.2006-1-012)
  - 7" intermediate casing Pathfinder guide shoe (Part No. 2003-1-007) and Howco self-fill insert float valve (Price Ref. 36A & 37) 5 Pathfinder stabilizers (Part No. 107-10) one every other joint above shoe. Run float two joints above shoe.
  - 4 1/2" production casing Pathfinder guide shoe (Part.#2003-1-000) and Larkin flapper type float collar (fig. 404 M&F)
- C. Tubing: 7570'of 1 1/2", 2.9#, J-55 10rd EUE tubing with a common pump seating nipple above perforated pup joint with bull plugged full joint for mud anchor on bottom.
- D. Wellhead Equipment: 3000 psi test tree. Wellhead representative to set all slips and cut off casing.

#### V. Cementing:


- 9 5/8" surface casing use 190 sks. of Class "B" cement with 1/4# gel-flake per sack and 3% calcium chloride (224 cu.ft. of slurry, 100% excess to circulate to surface). WOC 12 hours. Test casing to 600#/30 minutes.
- 7" intermediate casing use 100 sks. of 65/35 Class "B" Poz with 6% gel and 2% calcium chloride (8.3 gallons of water per sack) followed by 100 sks. of Class "B" with 2% calcium chloride (279 cu.ft. of slurry, 50% excess to cover Ojo Alamo). Run temperature survey at 8 hours. WOC 12 hours. Test casing to 1200#/30 minutes.
- 4 1/2" production casing precede cement with 40 bbls. of gel water (4 sks. gel) cement with 243 sks. of Class "B" with 8% gel, 1/4 cu.ft. fine gilsonite per sack and 0.4% HR-7, followed by 100 sks. of Class "B" with 1/4# fine tuf-plug per sack and 0.4% HR-7 (648 cu.ft. of slurry, 50% excess to fill to intermediate casing). Run temperature survey at 8 hours. WOC 18 hours.

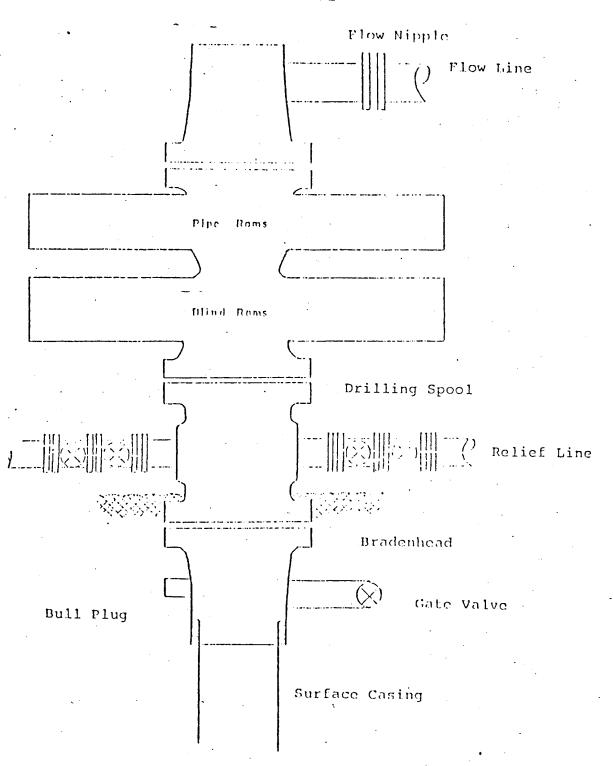

Scries 900 Double Gate BOP, rated at 3000 psi Working Pressure
When gas drilling operations begin a Shaffer type 50 or equivalent rotating head is installed on top of the flow nipple and the flow line is converted into a blowie line.

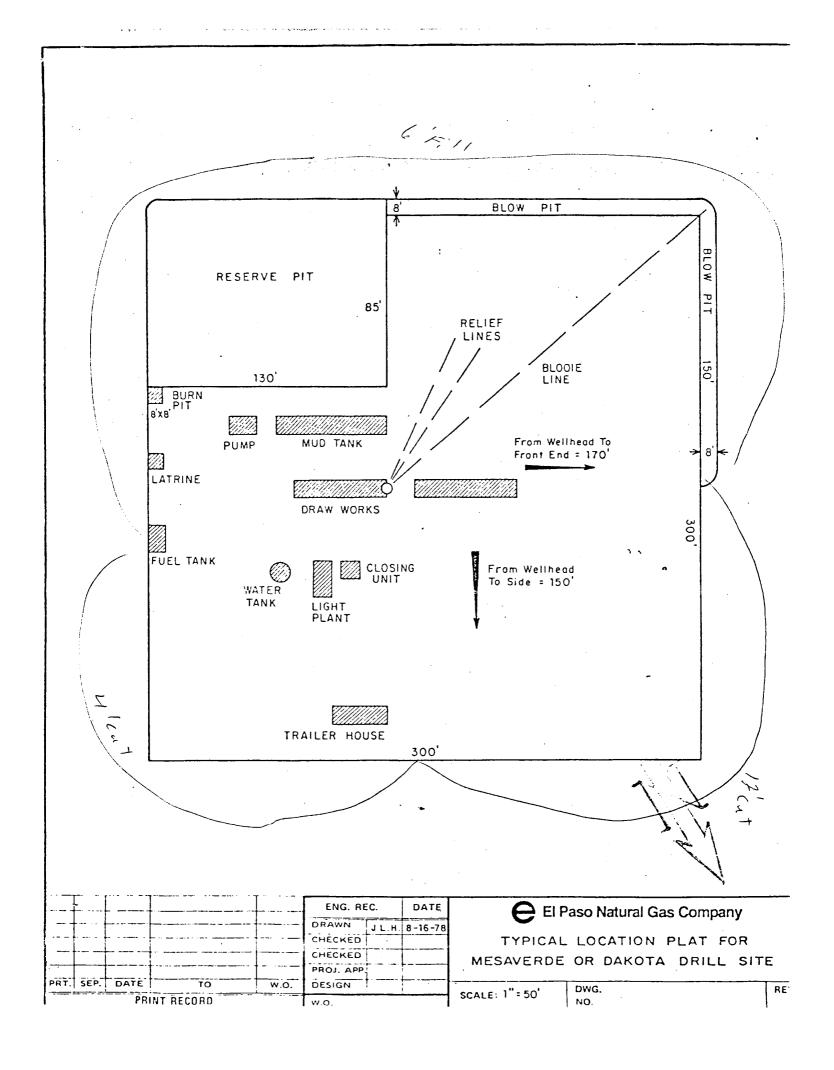


### EL PASO NATURAL GAS COMPANY San Juan 28-7 Unit #242E SW 7-28-7

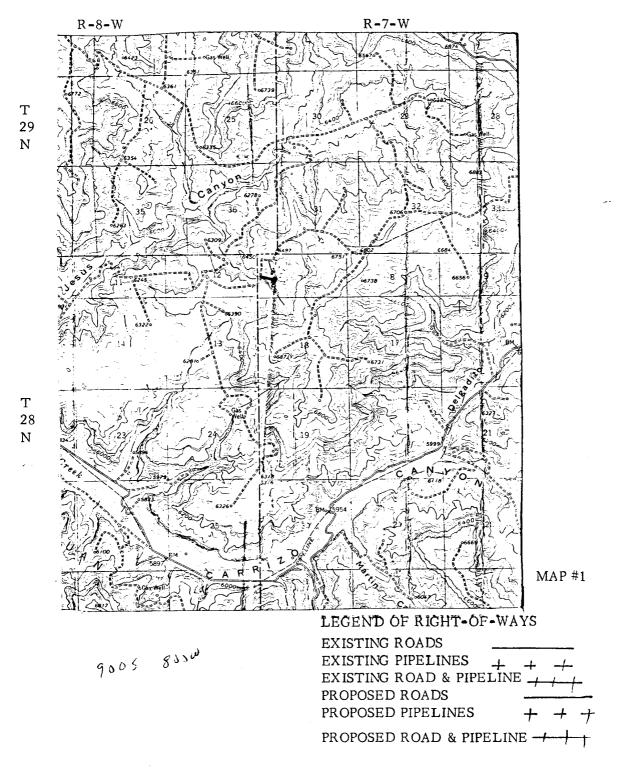



### EL PASO NATURAL GAS COMPANY San Juan 28-7 Unit #242E SW 7-28-7

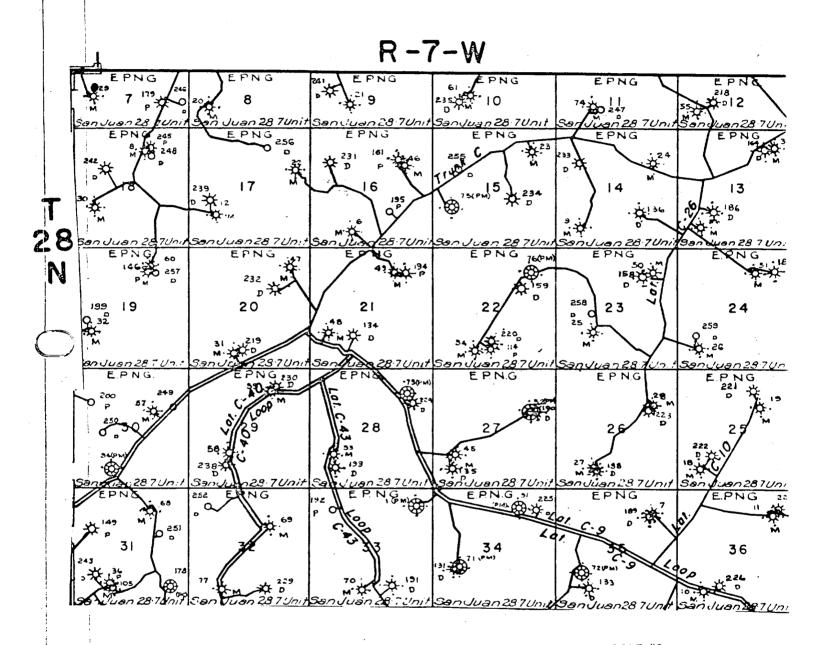

MAP #2
Proposed Location •