


1 AMANACD OIL  
POUND RANCL C-4  
C-14-28N-1E

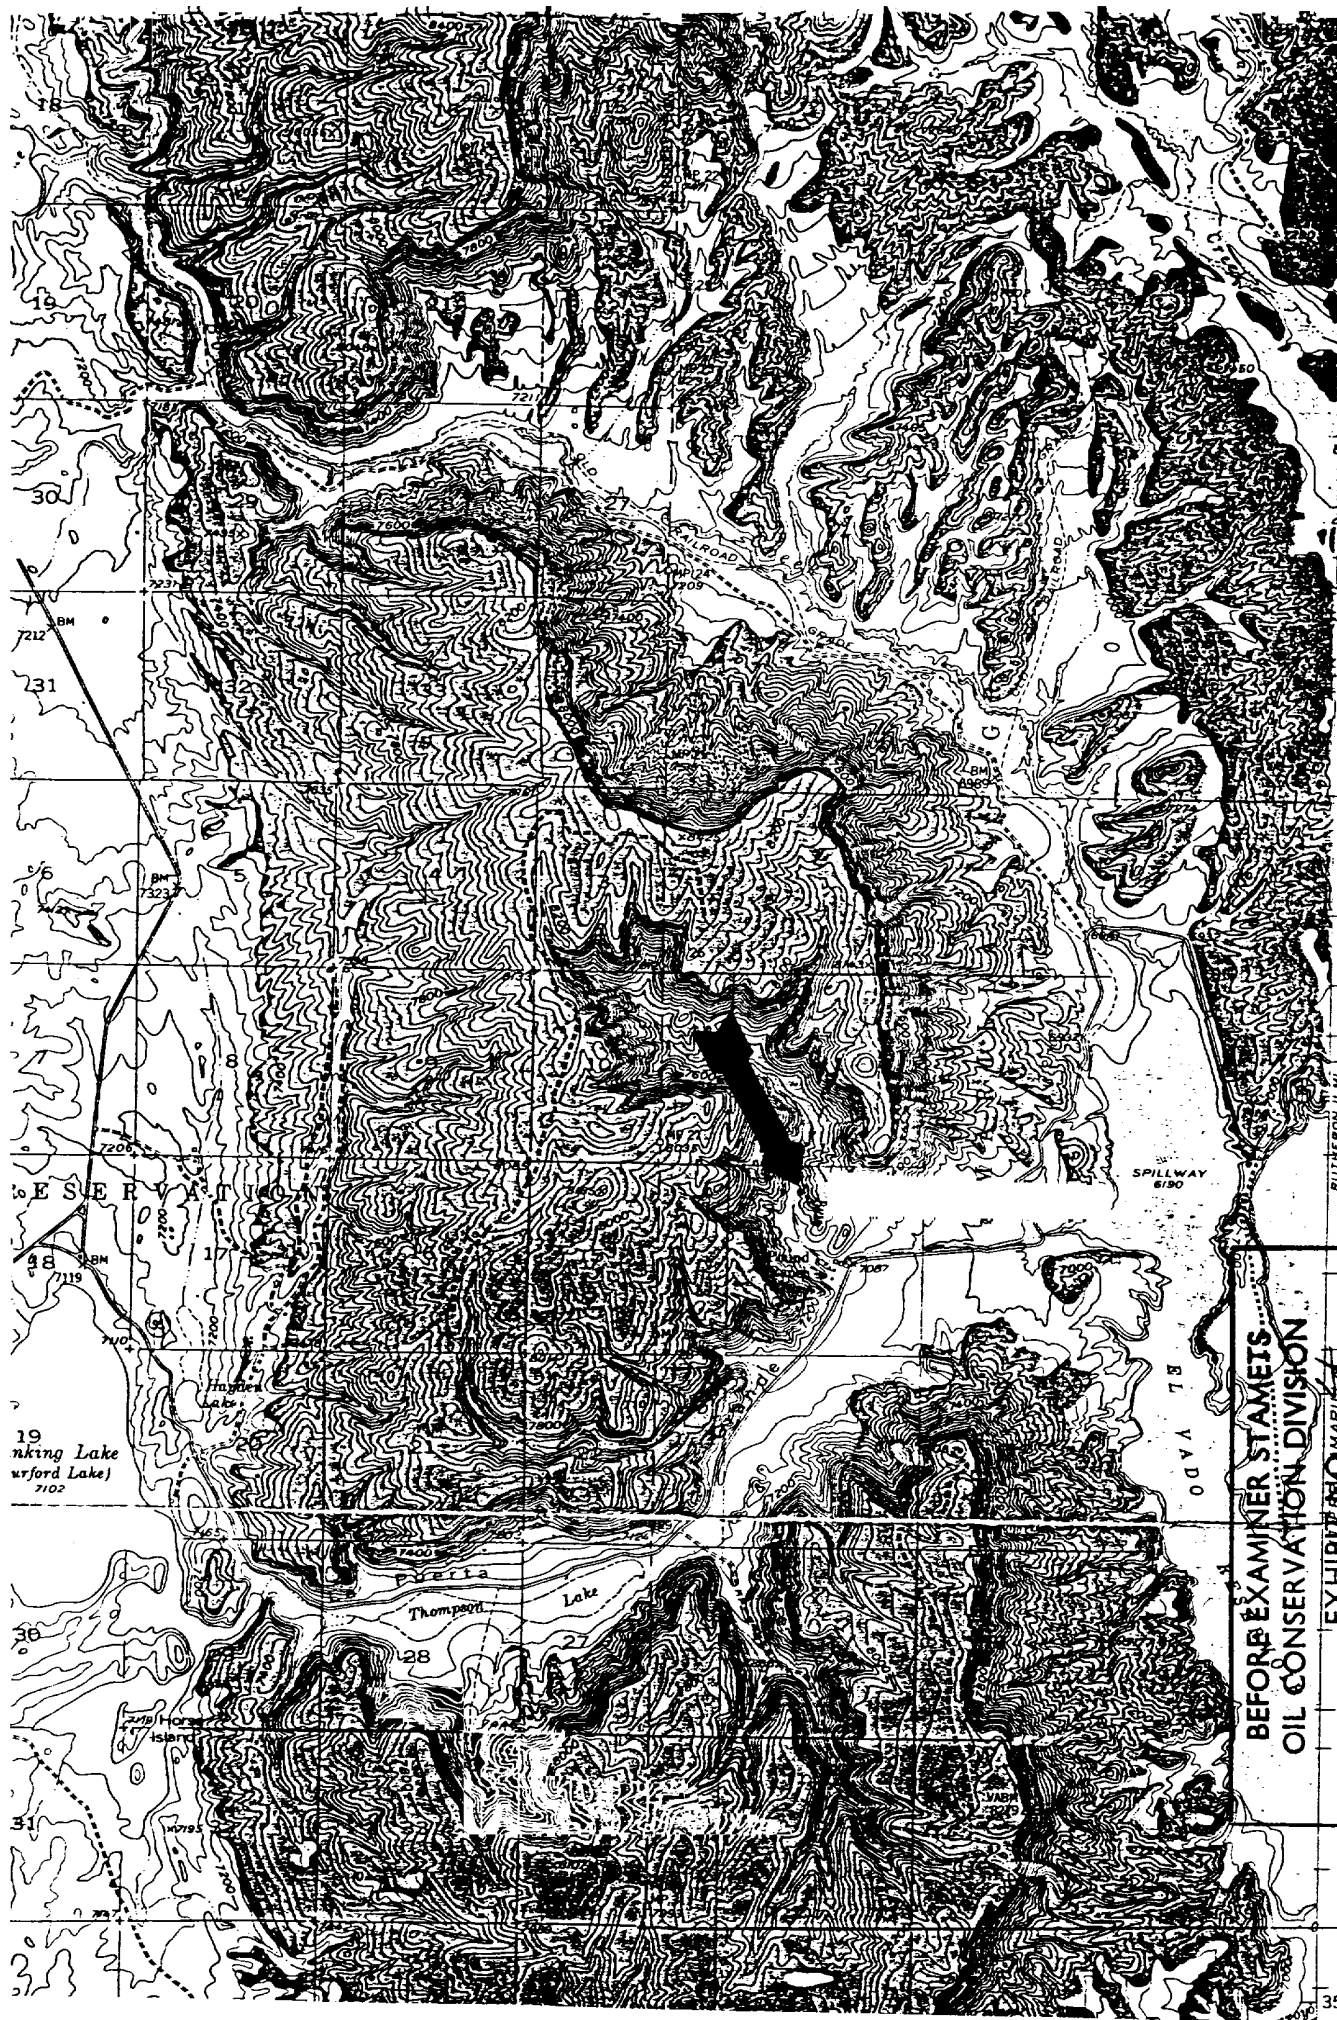

TCPO  
ETKIP


|  |  |
|--|--|
| <b>BEFORE EXAMINER STAMETS</b><br><b>OIL CONSERVATION DIVISION</b> |  |
| EXHIBIT NO. <del>MAR 14</del>                                      |  |
| CASE NO. 7627  |  |
| Submitted by <i>B. H. S. O. N.</i>                                 |  |
| Hearing Date 8-4-82  |  |

19  
inking Lake  
rford Lake)  
7102

Thompson  
Lake

SPILLWAY  
6190

ODVA 78

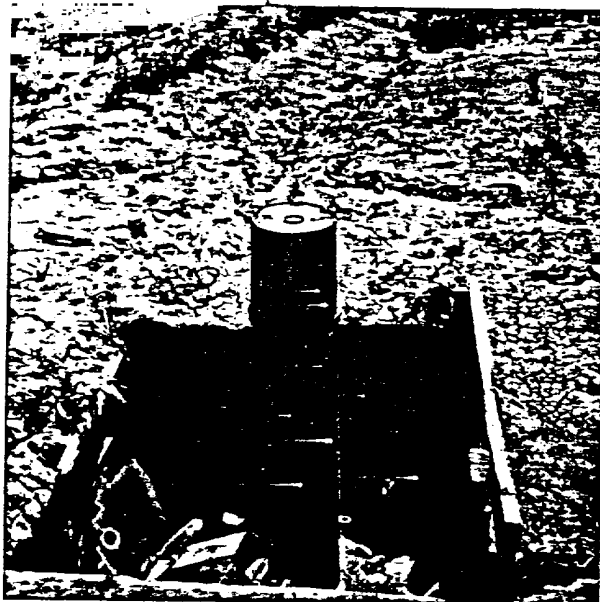

BEFORE EXAMINER STAMETS  
OIL CONSERVATION DIVISION

EXHIBIT NO. 5

CASE NO. 7627

Submitted by Bholson

Hearing Date 8-4-82



STATE OF NEW MEXICO  
**ENERGY AND MINERALS DEPARTMENT**  
 OIL CONSERVATION DIVISION  
 AZTEC DISTRICT OFFICE

BRUCE KING  
 GOVERNOR

LARRY KEHOE  
 SECRETARY

1000 RIO BRAZOS ROAD  
 AZTEC, NEW MEXICO 87410  
 (505) 334-6178

DIVISION APPROVED PLUGGING PROGRAM

Sandi Production Inc.  
 Tamanaco Oil Company  
 Pound Ranch C #14  
 C-14-28N-1E

1. Clean out hole to a total depth of 1680'
2. Establish circulation and set a cement plug 1680'-1480'.  
 If good circulation is maintained and fluid level does not drop significantly after one hour, go to Step 3. If not, wait a minimum of six hours and tag plug. If plug is above 1520' go to Step 3. If not, fill to 1480'
3. Set a cement plug 1400'-1250' using same procedure as Step 2
4. Set a cement plug 600'-450' using same procedure as Steps 2 and 3
5. Set a cement plug 250'-100'
6. Set a top plug and dry hole marker with at least ten sacks of cement
7. Fill pits, clean and level location

Note: All plugs will be with Class A, B, or C cement with or without an accelator.

|                           |                |
|---------------------------|----------------|
| BEFORE EXAMINER STAMETS   |                |
| OIL CONSERVATION DIVISION |                |
| EXHIBIT NO.               | <u>6</u>       |
| CASE NO.                  | <u>7627</u>    |
| Submitted by              | <u>Bholsan</u> |
| Hearing Date              | <u>8-4-82</u>  |