


Form 9-330



LOCATE WELL CORRECTLY

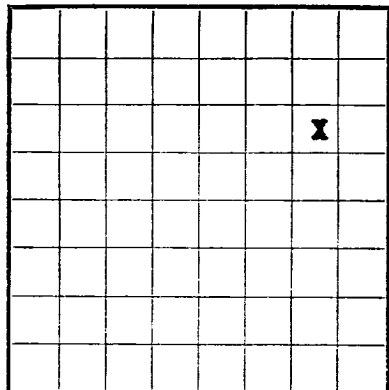

U. S. LAND OFFICE Navajo
SERIAL NUMBER I-149-Ind. 8473
LEASE OR PERMIT TO PROSPECT _____
UNITED STATES
DEPARTMENT OF THE INTERIOR
GEOLOGICAL SURVEY
ARMSTRONG, NEW MEXICO

LOG OF OIL OR GAS WELL

Company J. Glenn Turner Address Box 728 - Farmington, New Mexico
Lessor or Tract Navajo Field So. Blanco P.C. State New Mexico
Well No. 1-25 Sec. 25 T. 27-NR. 9-W Meridian N.M.P.M. County San Juan
Location 1650 ft. XX of N. Line and 895 ft. IX of E. Line of Sec. 25 Elevation 6120
(Derrick floor relative to sea level)

The information given herewith is a complete and correct record of the well and all work done thereon so far as can be determined from all available records.

Signed C. Benson Neal
Title Agent in Farmington

Date August 18, 1956

The summary on this page is for the condition of the well at above date.

Commenced drilling May 24, 1956, 19____ Finished drilling July 13, 1956, 19____

OIL OR GAS SANDS OR ZONES

(Denote gas by G)

No. 1, from ("G") 2044 to 2099 No. 4, from _____ to _____
No. 2, from _____ to _____ No. 5, from _____ to _____
No. 3, from _____ to _____ No. 6, from _____ to _____

IMPORTANT WATER SANDS

No. 1, from _____ to _____ No. 3, from _____ to _____
No. 2, from _____ to _____ No. 4, from _____ to _____

CASING RECORD

Size casing	Weight per foot	Threads per inch	Make	Amount	Kind of shoe	Cut and pulled from	Perforated		Purpose
							From—	To—	
<u>8-5/8"</u>	<u>24</u>	<u>8 rd. thd.</u>	<u>J-55</u>	<u>158</u>	<u>None</u>				<u>Surface</u>
<u>5-1/2"</u>	<u>168</u>	<u>8 rd. thd.</u>	<u>Halliburton</u>	<u>100</u>	<u>None</u>				<u>Long string</u>
									<u>Production</u>

MUDDING AND CEMENTING RECORD

Size casing	Where set	Number sacks of cement	Method used	Mud gravity	Amount of mud used
<u>8-5/8"</u>	<u>168</u>	<u>130</u>	<u>Halliburton</u>		<u>Mostly water</u>
<u>5-1/2"</u>	<u>2049</u>	<u>100</u>	<u>Halliburton</u>		<u>Mostly water</u>

PLUGS AND ADAPTERS

Heaving plug—Material _____ Length _____ Depth set _____
Adapters—Material _____ Size _____

SHOOTING RECORD

Size	Shell used	Explosive used	Quantity	Date	Depth shot	Depth cleaned out
<u>Sand oil treated on 7/13/56 from 2049' to 2099' with 17,500 gallons diesel oil and 30,000# sand. Flushed with 2,500 gallons diesel oil. Breakdown 1300#. Injection 42.4 barrels per minute.</u>						

TOOLS USED

Rotary tools were used from 168 feet to 2054 feet, and from _____ feet to _____ feet
Cable tools were used from 0 feet to 168 feet, and from 2054 feet to 2099 feet

Potential test taken

DATES

July 27, 1956, 19____ Shut in for potential test
Put to producing July 16, 1956, 19____

The production for the first 24 hours was _____ barrels of fluid of which _____% was oil; _____% emulsion; _____% water; and _____% sediment. Gravity, °Bé. _____

If gas well, cu. ft. per 24 hours 3,984 MCF/Day Gallons gasoline per 1,000 cu. ft. of gas _____

Rock pressure, lbs. per sq. in. 689 Well is shut in awaiting pipe line connection.

EMPLOYEES

Benson-Mentia-Greer Drilling, Corp., Driller _____, Driller
_____, Driller _____, Driller

FORMATION RECORD

FROM—	TO—	TOTAL FEET	FORMATION
<u>Surface</u>	<u>2039</u>	<u>2039</u>	<u>Surface sand and shale, Ojo Alamo, Kirtland and Fruitland formations.</u>
<u>2039</u>	<u>2044</u>	<u>5</u>	<u>Coal</u>
<u>2044</u>	<u>2099</u>	<u>55</u>	<u>Sand</u>
<u>Top of Pictured Cliffs: 2044'</u>			

U. S. LAND OFFICE
SERIAL NUMBER 1-14-Ind. 3413
LEASE OR PERMIT TO PROSPECT

UNITED STATES
DEPARTMENT OF THE INTERIOR
GEOLOGICAL SURVEY



LOG OF OIL OR GAS WELL

LOCATE WELL CORRECTLY

Company J. Glens
Location 1520 ft. of line and 802 ft. W. of line of sec. 25
Well No. 1-25
Section 25 T. 25-N. R. 25-W. M. P. M. County San Juan
Field So. Blanco P. C. State New Mexico
Address Box 138 - Farmington, New Mexico
The information given herewith is a complete and correct record of the well and all work done thereon so far as can be determined from all available records.
Signed C. Leeson Neal, Agent in Farmington
Date August 18, 1935

The summary on this page is for the condition of the well at above date.

Commenced drilling May 24, 1935, 10 Finished drilling July 12, 1935, 10

OIL OR GAS SANDS OR ZONES

(Denote gas by G)

No. 1, from 1520 to 1500
No. 2, from 1500 to 1480
No. 3, from 1480 to 1460

IMPORTANT WATER SANDS

No. 1, from 1460 to 1440
No. 2, from 1440 to 1420

CASING RECORD

Casing	Size	Weight	Length	Make	Amount	Kind of shoe	Cut and pulled from	Perforated	Purpose
8-1/8"	25 lb.	8 ft.	1-25	1-25	1-25	none			Gravel

HISTORY OF OIL OR GAS WELL

MUDDING AND CEMENTING RECORD

Shut	Water	Number	Method	Mud	Amount
3-1/2"	138	1-25	Wellbore	Wellbore	Wellbore

PLUGS AND ADAPTORS

Adaptor	Size	Length
Adaptor	1-25	1-25

SHOOTING RECORD

Shot	Weight	Quantity	Depth	Depth
30 lb.	1-25	1-25	1-25	1-25

TOOLS USED

Tools used from 1520 to 1500 feet to 1480 feet and from 1480 to 1460 feet to 1440 feet

DATES

Shut in for potential test July 27, 1935
Put to producing July 27, 1935

EMPLOYEES

Driller
Driller

FORMATION RECORD

From	To	Total Feet	Formation
1520	1500	20	Gravel sand and shale, Oil shale, Oil shale
1500	1480	20	Gravel sand and shale, Oil shale, Oil shale
1480	1460	20	Gravel sand and shale, Oil shale, Oil shale