

UNITED STATES
DEPARTMENT OF THE INTERIOR
GEOLOGICAL SURVEY

Form Approved.
Budget Bureau No. 42-R1424

SUNDRY NOTICES AND REPORTS ON WELLS

(Do not use this form for proposals to drill or to deepen or plug back to a different reservoir. Use Form 9-331-C for such proposals.)

1. oil ☐ well gas ☐ well other dry hole
2. NAME OF OPERATOR
Tenneco Oil Company
3. ADDRESS OF OPERATOR
Box 3249 Englewood, Co. 80155
4. LOCATION OF WELL (REPORT LOCATION CLEARLY. See space 17 below.)
AT SURFACE: 790' FNL 790' FEL
AT TOP PROD. INTERVAL:
AT TOTAL DEPTH:


16. CHECK APPROPRIATE BOX TO INDICATE NATURE OF NOTICE, REPORT, OR OTHER DATA

REQUEST FOR APPROVAL TO:

TEST WATER SHUT-OFF ☐
FRACTURE TREAT ☐
SHOOT OR ACIDIZE ☐
REPAIR WELL ☐
PULL OR ALTER CASING ☐
MULTIPLE COMPLETE ☐
CHANGE ZONES ☐
ABANDON* ☒
(other) ☐

SUBSEQUENT REPORT OF:

☐
☐
☐
☐
☐
☐
☐
☐
☐
☐

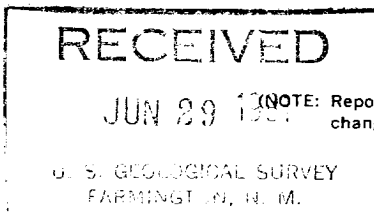

5. LEASE
SF-080168
6. IF INDIAN, ALLOTTEE OR TRIBE NAME

7. UNIT AGREEMENT NAME


8. FARM OR LEASE NAME
Watson B
9. WELL NO.
#1
10. FIELD OR WILDCAT NAME
Basin Dakota
11. SEC., T., R., M., OR BLK. AND SURVEY OR AREA
Sec 21 T27N R12W
12. COUNTY OR PARISH San Juan 13. STATE New Mexico
14. API NO.

15. ELEVATIONS (SHOW DF, KDB, AND WD)
5797' gr.

(NOTE: Report results of multiple completion or zone change on Form 9-330.)

17. DESCRIBE PROPOSED OR COMPLETED OPERATIONS (Clearly state all pertinent details, and give pertinent dates, including estimated date of starting any proposed work. If well is directionally drilled, give subsurface locations and measured and true vertical depths for all markers and zones pertinent to this work.)*

6/18/81 Per verbal approval from Earl Becker, USGS to Charles Boyles, Tenneco has revised the procedure to plug and abandon the above referenced well, due to unsalvageability of 1½" tbg below 4100'. Procedure is detailed on attached sheet.




Subsurface Safety Valve: Manu. and Type _____ Set @ _____ Ft.

18. I hereby certify that the foregoing is true and correct

SIGNED Charles Boyles TITLE Asst. Div. Adm. Mgr. DATE 6/23/81

(This space for Federal or State office use)

APPROVED
CONDITIONS OF APPROVAL, IF ANY:

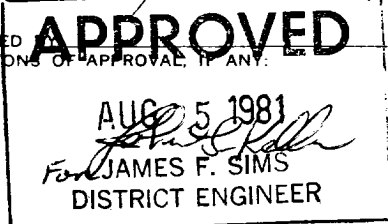

TITLE _____ DATE _____

*See Instructions on Reverse Side

NMOCC

LEASE Watson B

WELL NO. 1

9 5/8 8 5/8 "OD, 40-24 LB, J-55 CSG.W/ 160 SX
TOC @ Surface.

4 1/2 "OD, 11.6 9.5LB, J-55 CSG.W/ 250 SX
TOC @ Surface.

DETAILED PROCEDURE

- 1) MIRUPU
- 2) NDWH, NUBOP
- 3) Release Baker Model G pkr. POOH w/ 1 1/2" tbg and pkr
- 4) Tbg parted @ 4160'
- 5) Set cmt. retainer @ 4100'
- 6) Squeeze w/ 250 sx cmt
- 7) RIH w/ perf gun and perf 4 holes @ 2200'
- 8) RIH w/ cmt retainer on tbg. Set retainer @ 2000'.
Squeeze w/ 100 sx Class G cmt.
- 9) Sting out of retainer and spot 10 sx on top.
- 10) Spot 25 sx Class G neat cmt @ 220' up to surface
- 11) NDBOP. Cut csg off 4 1/2' below ground level
- 12) Clean, regrade, and reseed location per USGS requirements.

209'

DV tool @
1546'

4100'

4160'

Baker Model G 5809'

6' of 1 1/2"
tbg stuck
@ 5913' in
pkr.

6008'

6052'