

UNITED STATES
DEPARTMENT OF THE INTERIOR
GEOLOGICAL SURVEY

SUNDRY NOTICES AND REPORTS ON WELLS

(Do not use this form for proposals to drill or to deepen or plug back to a different reservoir. Use Form 9-331-C for such proposals.)

1. oil ☐ gas ☐ other dry hole
well well

2. NAME OF OPERATOR
Tenneco Oil Company

3. ADDRESS OF OPERATOR
Box 3249 Englewood, Co. 80155


4. LOCATION OF WELL (REPORT LOCATION CLEARLY. See space 17 below.)
AT SURFACE: 790' FNL 790' FEL
AT TOP PROD. INTERVAL:
AT TOTAL DEPTH:

16. CHECK APPROPRIATE BOX TO INDICATE NATURE OF NOTICE, REPORT, OR OTHER DATA

REQUEST FOR APPROVAL TO:

TEST WATER SHUT-OFF ☐
FRACTURE TREAT ☐
SHOOT OR ACIDIZE ☐
REPAIR WELL ☐
PULL OR ALTER CASING ☐
MULTIPLE COMPLETE ☐
CHANGE ZONES ☐
ABANDON* ☐
(other) ☐

SUBSEQUENT REPORT OF:

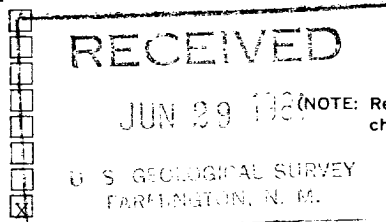

5. LEASE

SF-080168

6. IF INDIAN, ALLOTTEE OR TRIBE NAME

7. UNIT AGREEMENT NAME

8. FARM OR LEASE NAME

Watson B

9. WELL NO.

#1

10. FIELD OR WILDCAT NAME

Basin Dakota

11. SEC., T., R., M., OR BLK. AND SURVEY OR AREA

Sec 21 T27N R12W

12. COUNTY OR PARISH 13. STATE

San Juan

New Mexico

14. API NO.

15. ELEVATIONS (SHOW DF, KDB, AND WD)

5797' gr.

17. DESCRIBE PROPOSED OR COMPLETED OPERATIONS (Clearly state all pertinent details, and give pertinent dates, including estimated date of starting any proposed work. If well is directionally drilled, give subsurface locations and measured and true vertical depths for all markers and zones pertinent to this work.)*

6/19/81 Tally tbq. RIH w/ 4111' of 2 3/8" tbq and cmt retainer. Set retainer @ 4111'. Squeezed w/ 250 sx cement. Stung out of cmt retainer. Dumped 10 sx on top. Came out of hole. Lay down 64 jts. RIH w/ wireline and perf'd 4 holes @ 2200'. RIH w/ tbq and another cmt retainer. Set retainer @ 2000'. Pumped 100 sx neat cmt. Sting out of retainer. Dropped 10 sx on top. Come out of hole. Lay down 55 jts. Left 7 jts (217.8'). Spotted 55 sx cmt plug. Had communication out of the bradenhead and csg. Tied onto the bradenhead. Pumped 15 sx down bradenhead. Had cmt to surface, both @ bradenhead and csg. RDMOSU

Subsurface Safety Valve: Manu. and Type _____ Set @ _____ Ft.

18. I hereby certify that the foregoing is true and correct

SIGNED _____ TITLE Asst.Div.Adm.Mgr. DATE 6/23/81

APPROVED BY _____ TITLE _____
CONDITIONS OF APPROVAL IN ANY _____

APPROVED
JUN 23 1982
For JAMES F. SIMS
DISTRICT ENGINEER

*See Instructions on Reverse Side

NMOCC

