Form 3160-5 June 1990)

Conditions of approval, if any:

## UNITED STATES DEPARTMENT OF THE INTERIOR **BUREAU OF LAND MANAGEMENT**

CUMPRY NOTICES AND DEBORTS OF THE CO


FORM APPROVED Budget Bureau No. 1004-0135 Expires: March 31, 1993

Lease Designation and Serial No.

## SF-080382-A

SUNDRY NUTICES AND REPORTS ON WELLS	
And the management of the state	

6. If Indian, Allottee or Tribe Name Do not use this form for proposals to drill or to deepen or reentry to a different reservoir. Use "APPLICATION FOR PERMIT—" for such proposals 7 If Unit or CA. Agreement Designation SUBMIT IN TRIPLICATE Type of Well Oil Well 8. Weil Name and No. Other Name of Operator Schwerdtfeger Well No. 9 Marathon Oil Company 9. API Well No. Address and Telephone No. 30-045-06581 P.G. Box 552 10. Field and Poot, or Exploratory Area Midland, Texas 79702 (915)682-1626 - Location of Well (Footage, Sec., T., R., M., or Survey Description) Westkutz Canyon (Pictured C 11. Councy or Parish, State 990' FNL & 990' FEL; Section 17, T-27-N, R-11-W San Juan County, NM CHECK APPROPRIATE BOX(s) TO INDICATE NATURE OF NOTICE, REPORT, OR OTHER DATA TYPE OF SUBMISSION TYPE OF ACTION Notice of Intent Change of Plans Subsequent Report Plugging Back Casing Repear Altering Casing Other Temporarily Abandon Dispose Was n and Log form. 13. Describe Proposed or Completed Operations (Clearly state all pertinent details, and give pertinent dates, including estimated date of starting any proposed work. If well is director give subsurface locations and measured and true vertical depths for all markers and zones pertinent to this work.) 1) MIRU PU. ND Wellhead. Install & test BOPS. POOH w/production equipment. 2) TIH/CIBP. Set CIBP @ 1880'. Dump bail 5 sacks cement. Test casing from surface to 1880' to 500 psi. Hold pressure & record for 30 minutes. Release pressure. 3) ND BOPS & install wellhead. 4) RD PU. MOL. THIS APPROVAL EXPIRES OCT 0 1 1993 APR. BOTX D Title Advanced Engineering Tech This space for Federal or State office uses Tide

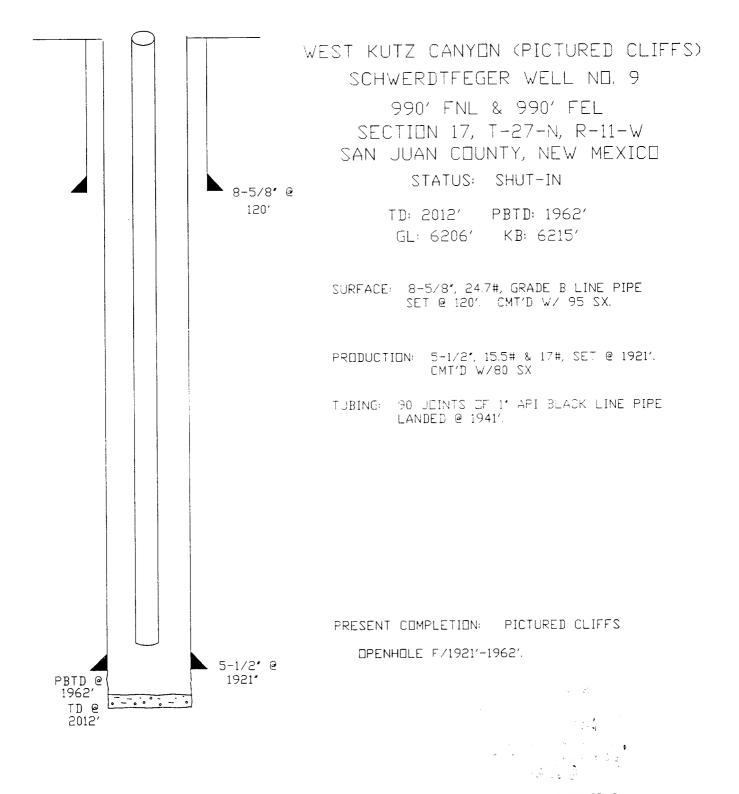

HISTORY: DRILLED IN JANUARY, 1952 BY FRONTIER REFINING COMPANY. COMPLETED IN PICTURED CLIFFS OPENHOLE F/1921'-1962'. TREATED W/50 QUARTS JELLED NITRO & 62 QUARTS LIQUID NITRO. SHUT-IN APRIL, 1986 AFTER PRODUCING 101 MMCF FROM PICTURED CLIFFS.