



U. S. LAND OFFICE Santa Fe
SERIAL NUMBER 078935
LEASE OR PERMIT TO PROSPECT _____

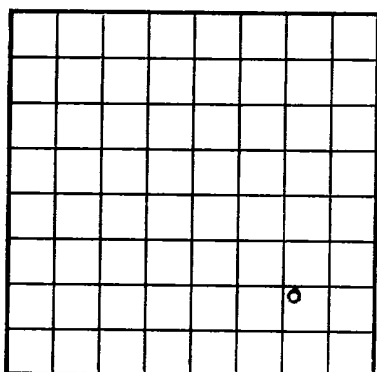

LOCATE WELL CORRECTLY

UNITED STATES
DEPARTMENT OF THE INTERIOR
GEOLOGICAL SURVEY



LOG OF OIL OR GAS WELL

Company Danube Oil Company Address 213 First National Bank Building Amarillo, Texas
Lessor or Tract Thompson Field West Kutz Canyon State New Mexico
Well No. 2 Sec. 2 T. 27N R. 13W Meridian NMPH County San Juan
Location 990 ft. (N. of S. Line and 990 ft. (E. of W. of E. Line of Sec. 2 Elevation 5983
(Derrick floor relative to sea level)

The information given herewith is a complete and correct record of the well and all work done thereon so far as can be determined from all available records.

Signed [Signature] Title Agent

Date July 26, 1951

The summary on this page is for the condition of the well at above date.

Commenced drilling June 27, 1951 Finished drilling July 25, 1951

OIL OR GAS SANDS OR ZONES
(Denote gas by G)

No. 1, from (C) 1615 to 1752 No. 4, from _____ to _____
No. 2, from _____ to _____ No. 5, from _____ to _____
No. 3, from _____ to _____ No. 6, from _____ to _____

IMPORTANT WATER SANDS

No. 1, from _____ to _____ No. 3, from _____ to _____
No. 2, from _____ to _____ No. 4, from _____ to _____

CASING RECORD

Size casing	Weight per foot	Threads per inch	Make	Amount	Kind of shoe	Cut and pulled from	Perforated		Purpose
							From-	To-	
<u>8-5/8</u>	<u>740</u>			<u>100</u>					
<u>5-1/2</u>				<u>1612</u>					

MUDDING AND CEMENTING RECORD

Size casing	Where set	Number sacks of cement	Method used	Mud gravity	Amount of mud used
<u>8-5/8</u>	<u>100</u>	<u>75</u>	<u>Halliburton</u>		
<u>5-1/2</u>	<u>1612</u>	<u>100</u>	<u>Halliburton</u>		

PLUGS AND ADAPTERS

Heaving plug—Material _____ Length _____ Depth set _____
Adapters—Material _____ Size _____

SHOOTING RECORD

Size	Shell used	Explosive used	Quantity	Date	Depth shot	Depth cleaned out
		<u>nitro glycerin</u>	<u>220 qts.</u>	<u>7-24</u>	<u>1672-1752</u>	<u>1752</u>

TOOLS USED

Rotary tools were used from 0 feet to 1612 feet, and from _____ feet to _____ feet
Cable tools were used from 1612 feet to 1752 feet, and from _____ feet to _____ feet

DATES

July 27, 1951 Put to producing _____, 19____
The production for the first 24 hours was _____ barrels of fluid of which _____ % was oil; _____ % emulsion; _____ % water; and _____ % sediment. Gravity, °Bé. _____
If gas well, cu. ft. per 24 hours 3.1 mil. Gallons gasoline per 1,000 cu. ft. of gas _____
Rock pressure, lbs. per sq. in. 450

EMPLOYEES

Camden Drilling Company, Driller for rotary _____, Driller
McCConnell Drilling Corp., Driller for cable tools _____, Driller

FORMATION RECORD

FROM-	TO-	TOTAL FEET	FORMATION
<u>0</u>	<u>101</u>	<u>101</u>	<u>surface sand</u>
<u>101</u>	<u>1189</u>	<u>1088</u>	<u>sand and shale</u>
<u>1189</u>	<u>1630</u>	<u>441</u>	<u>shale, coal, and sand</u>
<u>1630</u>	<u>1612</u>	<u>12</u>	<u>coal and sand</u>
			<u>Top Pictured Cliffs 1637</u>
<u>1612</u>	<u>1752</u>	<u>110</u>	<u>sand</u>

(OVER)

