

UNITED STATES
DEPARTMENT OF THE INTERIOR
GEOLOGICAL SURVEY

SUNDRY NOTICES AND REPORTS ON WELLS

(Do not use this form for proposals to drill or to deepen or plug back to a different reservoir. Use Form 9-331-C for such proposals.)


1. oil ☐ well gas ☐ well other ☒ Dry Hole
2. NAME OF OPERATOR
Tenneco Oil Company
3. ADDRESS OF OPERATOR
P. O. Box 3249, Englewood, CO
4. LOCATION OF WELL (REPORT LOCATION CLEARLY. See space 17 below.)
AT SURFACE: Unit G
AT TOP PROD. INTERVAL:
AT TOTAL DEPTH:

16. CHECK APPROPRIATE BOX TO INDICATE NATURE OF NOTICE, REPORT, OR OTHER DATA

REQUEST FOR APPROVAL TO:

TEST WATER SHUT-OFF ☐
FRACTURE TREAT ☐
SHOOT OR ACIDIZE ☐
REPAIR WELL ☐
PULL OR ALTER CASING ☐
MULTIPLE COMPLETE ☐
CHANGE ZONES ☐
ABANDON* ☐
(other) ☐

SUBSEQUENT REPORT OF:

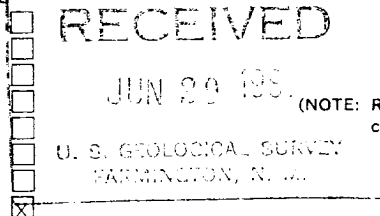

5. LEASE
SF 080168A
6. IF INDIAN, ALLOTTEE OR TRIBE NAME
7. UNIT AGREEMENT NAME
8. FARM OR LEASE NAME
Watson
9. WELL NO.
1
10. FIELD OR WILDCAT NAME
Basin Dakota
11. SEC., T., R., M., OR BLK. AND SURVEY OR AREA
Sec. 22, T27N R12W
12. COUNTY OR PARISH
San Juan
13. STATE
New Mexico
14. API NO.
15. ELEVATIONS (SHOW DF, KDB, AND WD)
5863' KB

(NOTE: Report results of multiple completion or zone change on Form 9-330.)

17. DESCRIBE PROPOSED OR COMPLETED OPERATIONS (Clearly state all pertinent details, and give pertinent dates, including estimated date of starting any proposed work. If well is directionally drilled, give subsurface locations and measured and true vertical depths for all markers and zones pertinent to this work.)*

6/22/81 - Per verbal approval from Richard Bell, USGS, to Charles Boyles, Tenneco has plugged and abandoned the above referenced well in the following manner: MIRUSU, NDWH, NUBOP. Pulled on tbq to unseat pkr; tbq parted @ 3060'. Perf'd 4 holes @ 3000'. RIH w/tbg and 5-1/2" cmt retainer set @ 2800'. Squeezed w/250 sx Class B neat. Dumped 10 sx on top of retainer. POOH. Laying down. Spotted plug from 1650-1350'; 35 sx, from 305' to surface; 40 sx, and 35 sx down bradenhead. RDMOSU. Will clean, grade and reseed location to USGS requirements.

Subsurface Safety Valve: Manu. and Type _____ Set @ _____ Ft.

18. I hereby certify that the foregoing is true and correct

SIGNED Charles Boyles TITLE Asst.Div.Adm.Mgr. DATE 6/24/81

APPROVED BY James F. Sims TITLE _____ DATE _____
CONDITIONS OF APPROVAL IN ANY

APPROVED

JUN 29 1982
For JAMES F. SIMS
DISTRICT ENGINEER

See Instructions on Reverse Side

NMOCC

