Form 3160-5 (August 1999)

UNITED STATES DEPARTMENT OF THE INTERIOR BUREAU OF LAND MANAGEMENT

FORM APPROVED OMB NO. 1004-0135 Expires: November 30, 2000

٥.	Lease Serial No.
	NMSF078390

SUNDRY NOTICES AND REPORTS ON WELLS

Do not use this form for proposals to drill or to re-enter an 6. If Indian, Allottee or Tribe Name abandoned well. Use form 3160-3 (APD) for such proposals 7. If Unit or CA/Agreement, Name and/or No. SUBMIT IN TRIPLICATE - Other instructions on reverses side 2002 Well Name and No. JONES A LS 9 1. Type of Well RECEIVED ☐ Oil Well ☐ Gas Well ☐ Other CONS. DN Name of Operator MARY CORL API Well No. Contact: DIST. 3 BP AMERICA PRODUCTION CO E-Mail: corleyml@bp.com 30-045-21267-00-S1 3b. Phone No. (include area code)
Ph: 281.366.4494 Field and Pool, or Exploratory 3a. Address P. O. BOX 3092 **BLANCO** HOUSTON, TX 77253 Fx: 281.366.0700 11. County or Parish, and State 4. Location of Well (Footage, Sec., T., R., M., or Survey Description) Sec 14 T28N R8W SWSE 1090FSL 1840FEL SAN JUAN COUNTY, NM 36.65704 N Lat, 107.64711 W Lon 12. CHECK APPROPRIATE BOX(ES) TO INDICATE NATURE OF NOTICE, REPORT, OR OTHER DATA TYPE OF SUBMISSION TYPE OF ACTION ☐ Water Shut-Off □ Acidize □ Deepen ☐ Production (Start/Resume) ■ Notice of Intent ■ Well Integrity □ Alter Casing ☐ Fracture Treat □ Reclamation ■ Subsequent Report ■ New Construction □ Other ☐ Casing Repair ☐ Recomplete ☐ Final Abandonment Notice ☐ Change Plans ☑ Plug and Abandon ☐ Temporarily Abandon Convert to Injection ☐ Plug Back ■ Water Disposal 13. Describe Proposed or Completed Operation (clearly state all pertinent details, including estimated starting date of any proposed work and approximate duration thereof. If the proposal is to deepen directionally or recomplete horizontally, give subsurface locations and measured and true vertical depths of all pertinent markers and zones. Attach the Bond under which the work will be performed or provide the Bond No. on file with BLM/BIA. Required subsequent reports shall be filed within 30 days following completion of the involved operations. If the operation results in a multiple completion or recompletion in a new interval, a Form 3160-4 shall be filed once testing has been completed. Final Abandonment Notices shall be filed only after all requirements, including reclamation, have been completed, and the operator has determined that the site is ready for final inspection.) BP America Production Company respectfully request permission to plug and abandon the subject well as per the attached procedure 14. I hereby certify that the foregoing is true and correct Electronic Submission #12802 verified by the BLM Well Information System For BP AMERICA PRODUCTION CO, sent to the Farmington Committed to AFMSS for processing by Steve Mason on 07/22/2002 (02SXM0415SE) Name (Printed/Typed) MARY CORLEY AUTHORIZED REPRESENTATIVE Signature (Electronic Submission) 07/16/2002 THIS SPACE FOR FEDERAL OR STATE OFFICE USE Date 07/22/2002 PETROLEUM ENGINEER Approved By STEPHEN MASON

Title 18 U.S.C. Section 1001 and Title 43 U.S.C. Section 1212, make it a crime for any person knowingly and willfully to make to any department or agency of the United States any false, fictitious or fraudulent statements or representations as to any matter within its jurisdiction.

Conditions of approval, if any, are attached. Approval of this notice does not warrant or certify that the applicant holds legal or equitable title to those rights in the subject lease

which would entitle the applicant to conduct operations thereon

Office Farmington

Jones A LS #9 P&A Procedure


Procedure:

Note: Notify regulatory agencies (NMOCD- Charlie Perrin 505-334-6178x16 and BLM-505-599-8907) 24 hours prior to beginning the P&A operations.

- 1. Check anchors. MIRU workover rig.
- 2. Check and record tubing, casing, and bradenhead pressures.
- 3. Blow down wellhead. Kill with water if necessary.
- 4. Nipple down WH. NU BOPs.
- 5. PU 1-1/4" workstring.
- 6. TIH with tubing-set 2-7/8" CIBP. Set CIBP at 2850'. PU and spot 300' cement plug (10 cu ft) above CIBP from 25/30'-2850' to cover Picture Cliffs and Fruitland intervals. TOH.
 Plus 6: Alamo bis 2104-2010'
- 7. RU WL unit. RIH and perforate squeeze holes at 2000'.
- 8. RIH and set 2-7/8" cement retainer at 1950'. Sting into retainer and squeeze Ojo Alamo with 80 cu ft cement. PU and spot 100' cement plug (4 cu ft) above retainer from 1850'-1950'

 Plus Nacimiento 685'- 585' inside a ourside 2 76' coin.
 - 9. RU WL unit. RIH and perforate squeeze holes at 250'.
 - 10. Pump 110 cu ft cement down casing and circulate to surface. Leave casing full of cement.
 - 11. ND BOP's. Cut off wellhead and install P&A marker.

Jones ALS#9

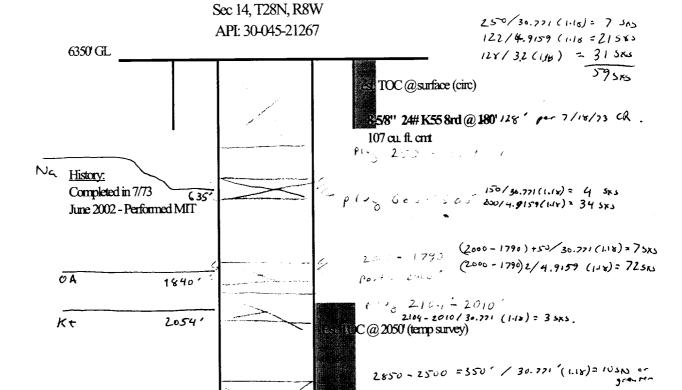

317 cu. ft cmt PBTD: 3005'

updated: 4/9/01 jad

2/8 64# J55 @3015'

BPQ 2050'

NOTES:

Pictured Cliffs Perforations
2885' - 2900' 30 shots
2912' - 2922' 30 shots
frac'd w/ 30,000 #'s sand

Fr

1. Tubingless completion

2550

June 2002 - Performed MIT- casing pressure tested OK to 550 psi. No fluid/fill was detected.