

UNITED STATES
DEPARTMENT OF THE INTERIOR
GEOLOGICAL SURVEY


SUNDRY NOTICES AND REPORTS ON WELLS

(Do not use this form for proposals to drill or to deepen or plug back to a different reservoir. Use Form 9-331-C for such proposals.)

1. oil ☐ well gas ☒ well other ☐
2. NAME OF OPERATOR
Dietrich Resources Corporation ✓
3. ADDRESS OF OPERATOR
410-17th Street, Suite 2450
Denver, Colorado 80202
4. LOCATION OF WELL (REPORT LOCATION CLEARLY. See space 17 below.)
AT SURFACE: 1850' FNL, 1850' FEL ✓
AT TOP PROD. INTERVAL: same
AT TOTAL DEPTH: same
16. CHECK APPROPRIATE BOX TO INDICATE NATURE OF NOTICE, REPORT, OR OTHER DATA

REQUEST FOR APPROVAL TO:
TEST WATER SHUT-OFF ☐
FRACTURE TREAT ☐
SHOOT OR ACIDIZE ☐
REPAIR WELL ☐
PULL OR ALTER CASING ☐
MULTIPLE COMPLETE ☐
CHANGE ZONES ☐
ABANDON* ☒
(other) ☐

SUBSEQUENT REPORT OF:

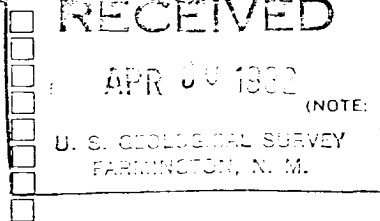

5. LEASE
NM-12021 ✓
6. IF INDIAN, ALLOTTEE OR TRIBE NAME
7. UNIT AGREEMENT NAME
8. FARM OR LEASE NAME
Federal ✓
9. WELL NO.
5 ✓
10. FIELD OR WILDCAT NAME
WAW Pictured Cliffs
11. SEC., T., R., M., OR BLK. AND SURVEY OR AREA
Sec 27-T27N-R13W ✓
12. COUNTY OR PARISH 13. STATE
San Juan New Mexico
14. API NO.
6135 G.L.
15. ELEVATIONS (SHOW DF, KDB, AND WD)

(NOTE: Report results of multiple completion or zone change on Form 9-330.)

17. DESCRIBE PROPOSED OR COMPLETED OPERATIONS (Clearly state all pertinent details, and give pertinent dates, including estimated date of starting any proposed work. If well is directionally drilled, give subsurface locations and measured and true vertical depths for all markers and zones pertinent to this work.)*

This well is incapable of further gas production. 2-7/8" casing was cemented in this well at a total depth of 1460' with 100 sacks cement. 2-7/8" casing is perforated 1396-1406' (10') with twenty .25" holes. We propose to plug and abandon this well by placing 10 sacks of cement inside casing across these perfs, with the top of cement to be at ± 1100'. We will then restore the location consistent with the requirements stated by your office in our approval to drill unless notified differently.

* See attached modifications.

Subsurface Safety Valve: Manu. and Type _____ Set @ _____ Ft.

18. I hereby certify that the foregoing is true and correct

SIGNED Ray F. Dietrich TITLE President DATE April 26, 1982

APPROVED BY JAMES F. SIMS TITLE _____ DATE _____
(The space for Federal or State office use)

APPROVED BY JAMES F. SIMS TITLE _____ DATE _____
CONDITIONS OF APPROVAL MAY 05 1982

AS AMENDED

For JAMES F. SIMS
DISTRICT ENGINEER

See Instructions on Reverse Side

NMOCC