

Form 5-100
May 1968

UNITED STATES
DEPARTMENT OF THE INTERIOR
GEOLOGICAL SURVEY

SUBMIT IN TRIPPLICATE
(Other instructions on re-
verse side)

Form approved
Budget Bureau No. 42-R1424

5. LEASE DESIGNATION AND SERIAL NO.

SP 078280

6. IF INDIAN, ALLOTTEE OR TRIBE NAME

- -

7. UNIT AGREEMENT NAME

- -

8. FARM OR LEASE NAME

Hammond WN Federal

9. WELL NO.

7A

10. FIELD AND POOL, OR WILDCAT

Blanco-Mesaverde

11. SEC., T., R., M., OR BLE. AND
SURVEY OR AREA

35-27N-8W

12. COUNTY OR PARISH

San Juan

13. STATE

New Mexico

SUNDRY NOTICES AND REPORTS ON WELLS

Do not use this form for proposals to drill or to deepen or plug back to a different reservoir.
Use "APPLICATION FOR PERMIT—" for such proposals.)

1. ☐ OIL
WELL ☐ GAS
WELL ☒ OTHER

2. NAME OF OPERATOR

Atlantic Richfield Company

3. ADDRESS OF OPERATOR

501 Lincoln Tower Bldg., 1860 Lincoln St., Denver, Colo. 80295

4. LOCATION OF WELL (Report location clearly and in accordance with any State requirements.*
See also space 17 below.)
At surface

1650' FSL & 990' FEL (NE SE) (Unit I) Section 35

API # 30-045-23216

14. PERMIT NO.

Mr. McGrath 1/12/78

15. ELEVATIONS (Show whether DF, RT, GR, etc.)

6133' GR (Ungraded)

16. Check Appropriate Box To Indicate Nature of Notice, Report, or Other Data

NOTICE OF INTENTION TO:

TEST WATER SHUT-OFF ☐

FRACTURE TREAT ☐

SHOOT OR ACIDIZE ☐

REPAIR WELL ☐

(Other) ☐

PULL OR ALTER CASING ☐

MULTIPLE COMPLETE ☐

ABANDON* ☐

CHANGE PLANS ☐

SUBSEQUENT REPORT OF:

WATER SHUT-OFF ☐

FRACTURE TREATMENT ☐

SHOOTING OR ACIDIZING ☐

(Other) N.O. Cementing Surf. Casing ☒

(NOTE: Report results of multiple completion on Well
Completion or Recompletion Report and Log form.)

REPAIRING WELL ☐

ALTERING CASING ☐


ABANDONMENT* ☐

17. DESCRIBE PROPOSED OR COMPLETED OPERATIONS (Clearly state all pertinent details, and give pertinent dates, including estimated date of starting any proposed work. If well is directionally drilled, give subsurface locations and measured and true vertical depths for all markers and zones pertinent to this work).*

MI REPORT - Arapahoe Drilling Company

Spudded 7:30 pm, 11-26-78. Drld 12-1/4" hole to 292'KB. Ran 7 jts (271') 8-5/8" OD 24# X-55 csg. Set at 286' KB cemented with 300 sx Cl "B" 2% CaCl. PD at 4:15 am, 11/27/78. Circld 20 sx cmt to pit. Press tested BOP & surf casing to 1000# for 30 min, held OK. B.P. at 245'.

11-27-78 Resumed Drlg.

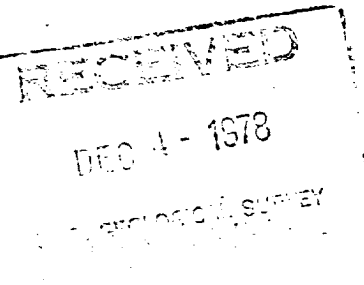

18. I hereby certify that the foregoing is true and correct

SIGNED

E. R. Still
E. R. Still

TITLE Operations Infc. Ass't.

DATE 11-30-78.

(This space for Federal or State office use)

APPROVED BY

CONDITIONS OF APPROVAL, IF ANY:

TITLE

DATE

XC:1-J.G. Taylor - Frm.
2-N.M. Cons. Comm. - Attee
(Mr. Kandrach)

*See Instructions on Reverse Side

OPERATOR