

UNITED STATES
DEPARTMENT OF THE INTERIOR
GEOLOGICAL SURVEY

APPLICATION FOR PERMIT TO DRILL, DEEPEN, OR PLUG BACK

1a. TYPE OF WORK

DRILL ☒DEEPEN ☐PLUG BACK ☐

b. TYPE OF WELL

OIL
WELL ☐GAS
WELL ☒

OTHER

SINGLE
ZONE ☒MULTIPLE
ZONE ☐

2. NAME OF OPERATOR

Getty Oil Company

3. ADDRESS OF OPERATOR

Drawer 510, Farmington, New Mexico 87401

4. LOCATION OF WELL (Report location clearly and in accordance with any State requirements.)*

At surface

1100' FNL & 1640' FEL (NE 1/4)

At proposed prod. zone
Same

14. DISTANCE IN MILES AND DIRECTION FROM NEAREST TOWN OR POST OFFICE*

15.0 miles East and South from Blanco, New Mexico

15. DISTANCE FROM PROPOSED*

LOCATION TO NEAREST
PROPERTY OR LEASE LINE, FT.
(Also to nearest drlg. unit line, if any)

1100'

16. NO. OF ACRES IN LEASE

640

17. NO. OF ACRES ASSIGNED
TO THIS WELL

160-152.13

18. DISTANCE FROM PROPOSED LOCATION*
TO NEAREST WELL, DRILLING, COMPLETED,
OR APPLIED FOR, ON THIS LEASE, FT.

2460'

19. PROPOSED DEPTH

3275'

20. ROTARY OR CABLE TOOLS

Rotary

21. ELEVATIONS (Show whether DF, RT, GR, etc.)

6063' GR

22. APPROX. DATE WORK WILL START*

July 1, 1979

23.

PROPOSED CASING AND CEMENTING PROGRAM

SIZE OF HOLE	SIZE OF CASING	WEIGHT PER FOOT	SETTING DEPTH	QUANTITY OF CEMENT
10-3/4"	8-5/8" new	24# K-55	250'	168 cu. ft. Class "B", 2% CaCl ₂
7-7/8"	4-1/2" new	10.5# K-55	3275'	1,321 cu. ft. lite and 171 cu. ft. Class "B"

1. Drill 10-3/4" and set 8-5/8" casing to 250' with good returns.
2. Log B.O.P. checks daily and drill 7-7/8" hole to 3275'.
3. Run tests, if warranted, and run 4-1/2" casing if productive.
4. Run logs as needed, and perforate and stimulate as needed.

EXHIBITS ATTACHED:

- "A" Location and Elevation Plat
- "B" The Ten-Point Compliance Program
- "C" The Blowout Preventer Diagram
- "D" The Multi-Point Requirements for A.P.D.
- "E" Access Road into Location
- "F" Radius Map of Field
- "G" Drill Pad Layout, Cut-Fill Cross Section
- "H" Drill Rig Layout
- "K" Acidizing & Fracing Layout

IN ABOVE SPACE DESCRIBE PROPOSED PROGRAM: If proposal is to deepen or plug back, give data on present productive zone and proposed new productive zone. If proposal is to drill or deepen directionally, give pertinent data on subsurface locations and measured and true vertical depths. Give blowout preventer program, if any.

24.

SIGNED

OS & Cab

TITLE

Area Superintendent

(This space for Federal or State office use)

PERMIT NO.

APPROVAL DATE

APPROVED BY

TITLE

DATE

CONDITIONS OF APPROVAL, IF ANY:

*ak French**mm*

*See Instructions On Reverse Side

5. LEASE DESIGNATION AND SERIAL NO.

SF 078357

6. IF INDIAN, ALLOTTEE OR TRIBE NAME

N/A

7. UNIT AGREEMENT NAME

N/A

8. FARM OR LEASE NAME

Marshall "A"

9. WELL NO.

#7

10. FIELD AND POOL, OR WILDCAT

Harris Mesa-Chacra

11. SEC., T., R., M., OR BLK.
AND SURVEY OR AREA

Sec. 14 T27N R9W

12. COUNTY OR PARISH


San Juan

13. STATE

New Mexico

RECEIVED

U.S. GEOLOGICAL SURVEY



All distances must be from the outer boundaries of the Section.


Operator GETTY OIL COMPANY		Lease MARSHALL "A"		Well No. 7
Init Letter B	Section 14	Township 27N	Range 9W	County San Juan
Actual Footage Location of Well: 1100 feet from the North line and 1640 feet from the East line				
Ground Level Elev. 6063	Producing Formation Chacra	Pool Harris Mesa Chacra	Dedicated Acreage: 160 152.13 Acres	

1. Outline the acreage dedicated to the subject well by colored pencil or hatchure marks on the plat below.
2. If more than one lease is dedicated to the well, outline each and identify the ownership thereof (both as to working interest and royalty).
3. If more than one lease of different ownership is dedicated to the well, have the interests of all owners been consolidated by communitization, unitization, force-pooling, etc?

☐ Yes ☐ No If answer is "yes," type of consolidation _____

If answer is "no," list the owners and tract descriptions which have actually been consolidated. (Use reverse side of this form if necessary.) _____

No allowable will be assigned to the well until all interests have been consolidated (by communitization, unitization, forced-pooling, or otherwise) or until a non-standard unit, eliminating such interests, has been approved by the Division.

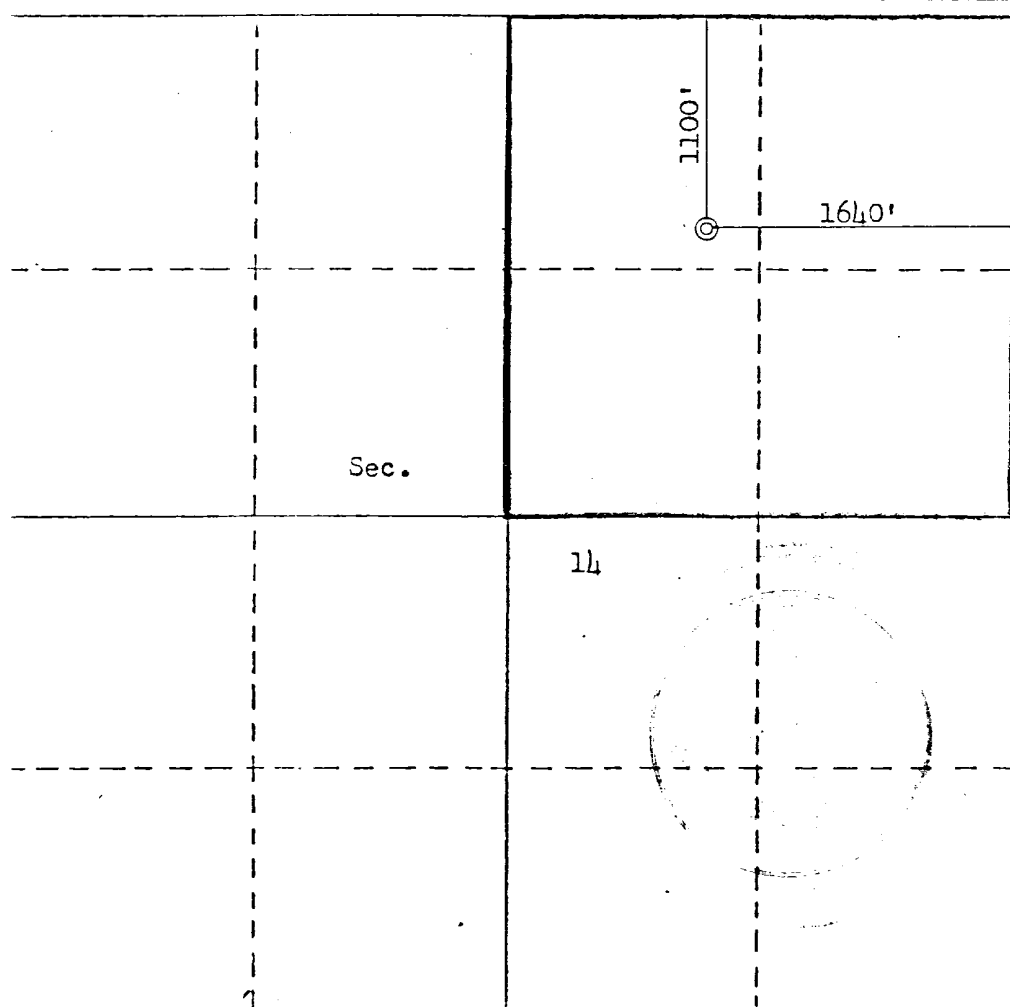

CERTIFICATION

I hereby certify that the information contained herein is true and complete to the best of my knowledge and belief.

George Lapaseotes
Name **George Lapaseotes**

Position **Vice President**

Company **Powers Elevation**

Date **June 22, 1979**

I hereby certify that the well location shown on this plat was plotted from field notes of actual surveys made by me or under my supervision, and that the same is true and correct to the best of my knowledge and belief.

Date Surveyed **May 31, 1979**
Registered Professional Engineer
and/or Land Surveyor

Robert M. Kerr, Jr.
Certified **ROBERT M. KERR, JR.**

3950

EXHIBIT "B"

TEN-POINT COMPLIANCE PROGRAM
OF NTL-6 APPROVAL OF OPERATIONS

Attached to Form 9-331C
Getty Oil Company
#7 Marshall "A"
1100' FNL & 1640' FEL
Sec. 14 T27N R9W
San Juan County, New Mexico

1. The Geologic Surface Formation

The surface formation is an unnamed shale.

2. Estimated Tops of Important Geologic Markers

Fruitland	1910'
Pictured Cliffs	2095'
Lewis	2170'
Chacra	3010'
Total Depth	3275'

3. Estimated Depths of Anticipated Water, Oil, Gas or Minerals

2095' - 2170'	Gas
3010' - 3205'	Gas

4. The Proposed Casing Program

Hole Size	Interval	Section Length	Size (OD)	Weight, Grade & Joint	New or Used	Mud* Weight	SF _t	SF _e	SF _b
10-3/4"	0 - 250'	250'	8-5/8"	24# K-55 8 rnd. ST&C	New	45#	43.8	11.0	23.6
7-7/8"	0 - 3275'	3275'	4½"	10.5# K-55 8 rnd. ST&C	New	30#	4.2	2.4	2.4

*At casing setting

Cement Program

Surface - 8-5/8 - 168 cubic feet, Class "B", 2% CaCl₂.

Production - 4½ - lead: 1,321 cubic feet lite with 6% gel, 12.5#/sack
gilsonite, ¼#/sack cellophane.

tail: 171 cubic feet Class "B", 2% CaCl₂.

5. The Operator's Minimum Specifications for Pressure Control

EXHIBIT "C" is a schematic diagram of the blowout preventer equipment. The BOP's will be hydraulically tested to the full working pressure after nipping up and after any use under pressure. Pipe rams will be operationally checked each 24-hour period, as will blind rams each time pipe is pulled out of the hole. Such checks of BOP will be noted on daily drilling reports.

Accessories to BOP will include an upper and lower kelly cock, floor safety valve, and choke manifold with pressure rating equivalent to the BOP stack.

6. The Type and Characteristics of the Proposed Circulating Muds

Mud system will be gel-chemical with adequate stocks of sorptive agents on site to handle possible spills of fuel and oil on the surface. Heavier muds will be on location to be added if pressure requires.

<u>Interval</u>	<u>Type</u>	<u>Weight/Gal.</u>	<u>Viscosity (Sec.)</u>	<u>Water Loss</u>	<u>Additives</u>
0 - 250'	gel-lime	8.5 - 9.0	45	NC	lime
250' - 3275'	gel-polymer	8.5 - 9.0	28-30	8 - 12 cc	polymer

7. The Auxiliary Equipment to be Used

- (a) A kelly cock will be kept in the string.
- (b) A float will be used at the bit.
- (c) The mud system will be monitored visually.
- (d) A stabbing valve will be on the floor to be stabbed into the drill pipe when kelly is not in the string.

8. The Testing, Logging and Coring Programs to be Followed

- (a) No DST's will be run.
- (b) The logging program will consist of a DILL from 250' - 3275'; detail scale (5" to 100') from 2000' - 3275'; compensated Neutron Formation Density from 2000' - 3275'; GR from 0 - 2000'.
- (c) No coring is anticipated.
- (d) Completion Program: 1,500 gallons hydrogen chloride acid.
Frac with 1500# 20-40 sand, 4000# 10-20 sand, 5000 gallons treated water, flush with 2100 gallons treated water. See EXHIBIT "K".

9. Any Anticipated Abnormal Pressures or Temperatures

No abnormal pressures or temperatures have been noted or reported in wells drilled in the area nor at the depths anticipated in this well. Bottom hole pressure expected is 1500#.

No hydrogen sulfide or other hazardous fluids or gases have been found, reported or known to exist at these depths in the area.

10. Anticipated Starting Date and Duration of the Operations

The anticipated starting date is set for July 1, 1979, or as soon as possible after examination and approval of drilling requirements. Operations should be completed within five days.

EXHIBIT "C"

Blowout Preventer
Diagram

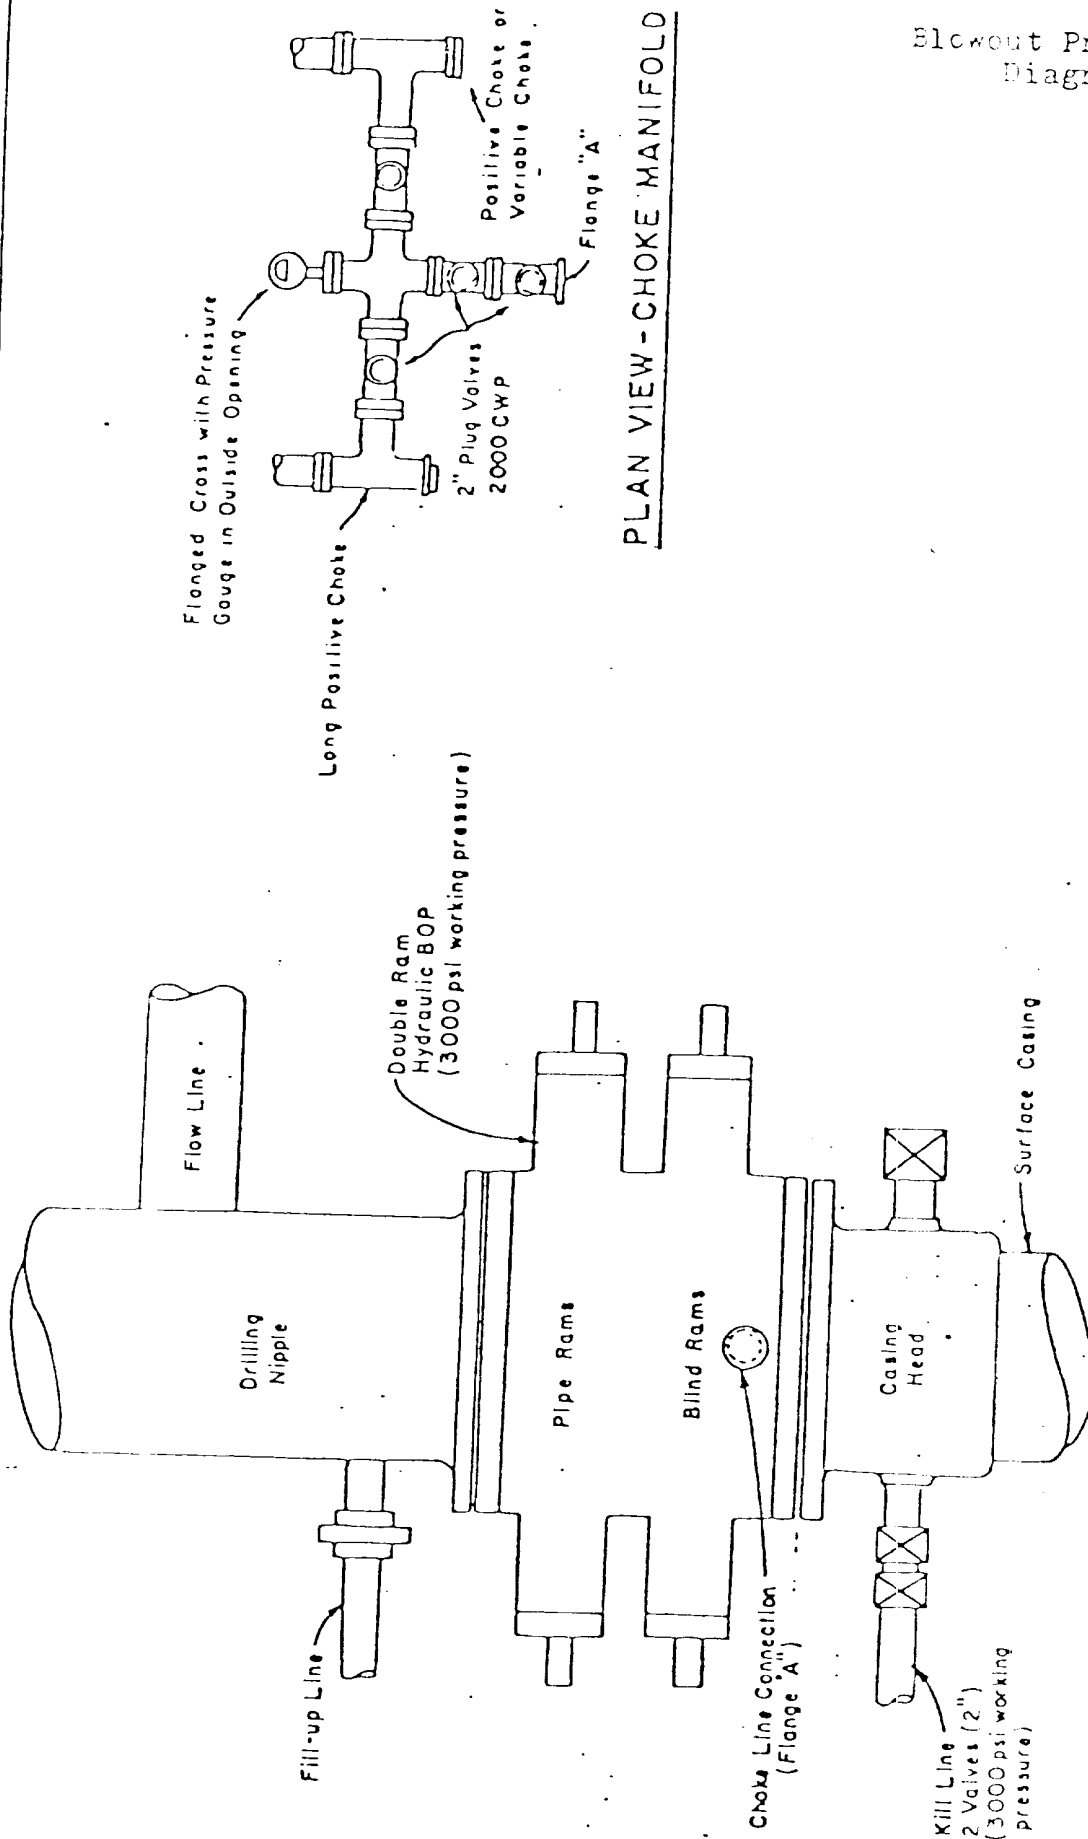


EXHIBIT "D"

MULTI-POINT REQUIREMENTS TO ACCOMPANY A.P.D.

Attached to Form 9-331C
Getty Oil Company
#7 Marshall "A"
1100' FNL & 1640' FEL
Sec. 14 T27N R9W
San Juan County, New Mexico

1. Existing Roads

- A. The proposed well site and elevation plat is shown as EXHIBIT "A".
- B. The distance from the Fire Station in Blanco, New Mexico is 15 miles. Proceed East on Highway #17 for 1.3 miles, thence down Cutter Dam Road for 4.3 miles to Five Mile Crossing, thence on county road Southeasterly 3.1 miles, continue Southerly on county road #A-58 6.3 miles, thence 200' on new access road to location, as shown on EXHIBIT "E".
- C. All roads to location are color-coded on EXHIBIT "E". A new access road 200 feet from the existing county road will be required, as shown on EXHIBIT "E".
- D. N/A
- E. This is a development well. All existing roads within a three-mile radius are shown on EXHIBIT "E".
- F. The existing roads need no improvement. Maintenance will be performed as required.

2. Planned Access Roads

Map showing all necessary access roads to be constructed or reconstructed is shown as EXHIBIT "E" for the following:

- (1) The maximum width of the running surface of the 200 feet of access road as you leave the existing county road will be 18'.
- (2) The grade will be 8% (eight percent) or less.
- (3) No turn outs are planned.
- (4) Appropriate water bars will be constructed to assure drainage off location to conform with the natural drainage pattern.

- (5) No culverts are needed. No major cuts or fills are anticipated along access road during drilling operation.
- (6) Surfacing materials will be native soil.
- (7) No gates, cattle guards or fence cuts are needed.
- (8) The new access road to be built has been staked during the time of staking the location, and is centerline flagged as shown on EXHIBIT "E".

3. Location of Existing Wells

For all existing wells within one mile radius of development well, see EXHIBIT "F".

- (1) There are no water wells within a one mile radius of this location.
- (2) There is one abandoned well in this one mile radius.
- (3) There are no temporarily abandoned wells.
- (4) There are no disposal wells.
- (5) There are no wells presently being drilled.
- (6) There are 29 producing wells within this one mile radius.
- (7) There are no shut-in wells.
- (8) There are no injection wells.
- (9) There are no monitoring or observation wells for other uses.

4. Location of Existing and/or Proposed Facilities

A. Within one-mile radius of location, the following existing facilities are owned or controlled by lessee/operator:

- (1) Tank Batteries: None
- (2) Production Facilities: None
- (3) Oil Gathering Lines: None
- (4) Gas Gathering Lines: None
- (5) Injection Lines: None
- (6) Disposal Lines: None

- B. If production is obtained, new facilities will be as follows:
- (1) No production facilities will be located on the pad.
 - (2) All well flow lines will be buried and will be on the well site and battery site.
 - (3) Drill Pad will be 300 feet long and 150 feet wide.
 - (4) No construction materials for battery site and pad will be necessary.
 - (5) Any necessary pits will be fenced and flagged to protect livestock and wildlife.
- C. Rehabilitation, whether well is productive or dry, will be made on all unused areas in accordance with BLM stipulations.

5. Location and Type of Water Source

- A. The source of water will be Blanco-Largo Canyon, 4 miles North of the location.
- B. Water will be transported by truck over existing roadways.
- C. No water well is to be drilled on this lease.

6. Construction Materials

- A. No construction materials are needed for drilling and access roads into the drilling location unless production is obtained. The surface soil materials will be sufficient or will be provided by the Dirt Contractor as needed.
- B. No construction materials will be taken off Federal land.
- C. All surface soil materials for construction of access roads are sufficient.
- D. All major access roads presently exist as shown on EXHIBIT "E".

7. Handling of Waste Materials and Disposal

- (1) Drill cuttings will be buried in the reserve pit and covered.
- (2) Drilling fluids will be handled in the reserve pit.
- (3) Any fluids produced during drilling test or while making pro-

duction test will be collected in a test tank. If a test tank is not available during drilling, fluids will be handled in reserve pit. Any spills of oil, gas, salt waters or other noxious fluids will be cleaned up and removed.

- (4) Chemical facilities will be provided for human waste.
- (5) Garbage and non-flammable waste and salts and other chemicals produced during drilling or testing will be handled in trash pit. Flammable waste will be disposed of in burn pit. Drill fluids, water drilling mud and tailings will be kept in reserve pit, as shown on EXHIBIT "H". The trash and/or burn pit will be totally enclosed with small mesh wire to prevent wind scattering trash before being burned or buried. Reserve pit will be fenced on three sides and the fourth side fenced upon removal of the rig.
- (6) After the rig moves out, all materials will be cleaned up and no adverse materials will be left on location. Any dangerous open pit will be fenced during drilling and kept closed until such time as the pit is leveled.

8. Ancillary Facilities

No air strip, camp or other facilities will be built during drilling of this well.

9. Well Site Layout

- (1) EXHIBIT "G" is the Drill Pad Layout as staked, with elevations by Kerr Land Surveying of Farmington, New Mexico. Cuts and fills have been drafted to visualize the planned cut across the locations spot and to the deepest part of the pad. Topsoil will be stockpiled per BLM specifications determined at time of pre-drill inspection.
- (2) EXHIBIT "H" is a plan diagram of the proposed rig and equipment, reserve pit, burn and trash pit, pipe racks and mud tanks. No permanent living facilities are planned. There will be a trailer on site.
- (3) EXHIBIT "G" is a diagram showing the proposed production facilities layout.
- (4) The reserve pits will not be lined. Steel mud tanks may be used during drilling operations.

10. Plans for Restoration

- (1) Backfilling, leveling and contouring are planned as soon as all pits have dried. Waste disposal and spoils materials will be buried or hauled away immediately after drilling is completed. If production is obtained, the unused area will be restored as soon as possible.
- (2) The soil banked material will be spread over the area. Revegetation will be accomplished by planting mixed grasses as per formula provided by the BLM. Revegetation is recommended for road area, as well as around drill pad.
- (3) Three sides of the reserve pit will be fenced during drilling operations. Prior to rig release, the reserve pit will be fenced on the fourth side to prevent livestock or wildlife from becoming entrapped; and the fencing will be maintained until leveling and cleanup is accomplished.
- (4) If any oil is on the pits and is not immediately removed after operations cease, the pit containing the oil or other adverse substances will be flagged overhead or covered with wire mesh.
- (5) The rehabilitation operations will begin immediately after the drilling rig is removed. Removal of oil or other adverse substances will begin immediately or area will be flagged and fenced. Other cleanup will be done as needed. Planting and revegetation is considered best in Spring, 1980 unless requested otherwise.

11. Other Information

- (1) The soil is a sandy-clay loam. No distinguishing geological features are present. The area is covered with cactus, sagebrush, native grass, and Cedar trees. There are livestock and rabbits in the area. The topography is gently sloping Southeasterly.
- (2) The primary surface use is for grazing. The surface is owned by the Southern Utes.
- (3) The closest live water is the Blanco-Largo Canyon, 4 miles North of the location.

The closest occupied dwellings are farms located 0.1 mile Northerly of the location, as shown on EXHIBIT "E".

There are no known archaeological, historical, or cultural heritages that will be disturbed by this drilling.

- (4) Restrictions: Operator must have all rights from surface to base of Mesa Verde.
- (5) Drilling is planned for on or about July 1, 1979. Operations should be completed within 5 days.

12. Lessee's or Operator's Representative

George Lapaseotes
Agent Consultant for
Getty Oil Company
600 South Cherry Street
Suite 1201
Denver, Colorado 80222
(303) 321-2217

Dick Hergenreter
Getty Oil Company
Drawer 510
Farmington, New Mexico 87401
(505) 325-9682

13. Certification

I hereby certify that I, or persons under my direct supervision, have inspected the proposed drillsite and access route; that I am familiar with the conditions which presently exist; that the statements made in this plan are, to the best of my knowledge, true and correct; and that the work associated with the operations proposed herein will be performed by Getty Oil Company and its contractors and subcontractors in conformity with this plan and the terms and conditions under which it is approved.

Date

6-25-79

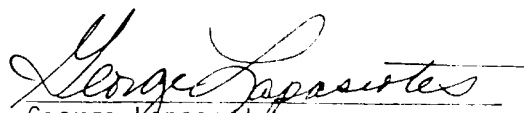

George Lapaseotes
Agent Consultant for
Getty Oil Company


EXHIBIT "E"
Access Road onto Location

16 15 14 13 12 11 10 9 8 7 6 5 4 3 2 1

Closest Dwelling

Getty Oil Company
7 Marshall "A"
1600' FME & 1640' FEL
16 15 14 13 12 11 10 9 8 7 6 5 4 3 2 1
San Juan County, New Mexico


LEGEND
— Gravel Road
— New Access Road

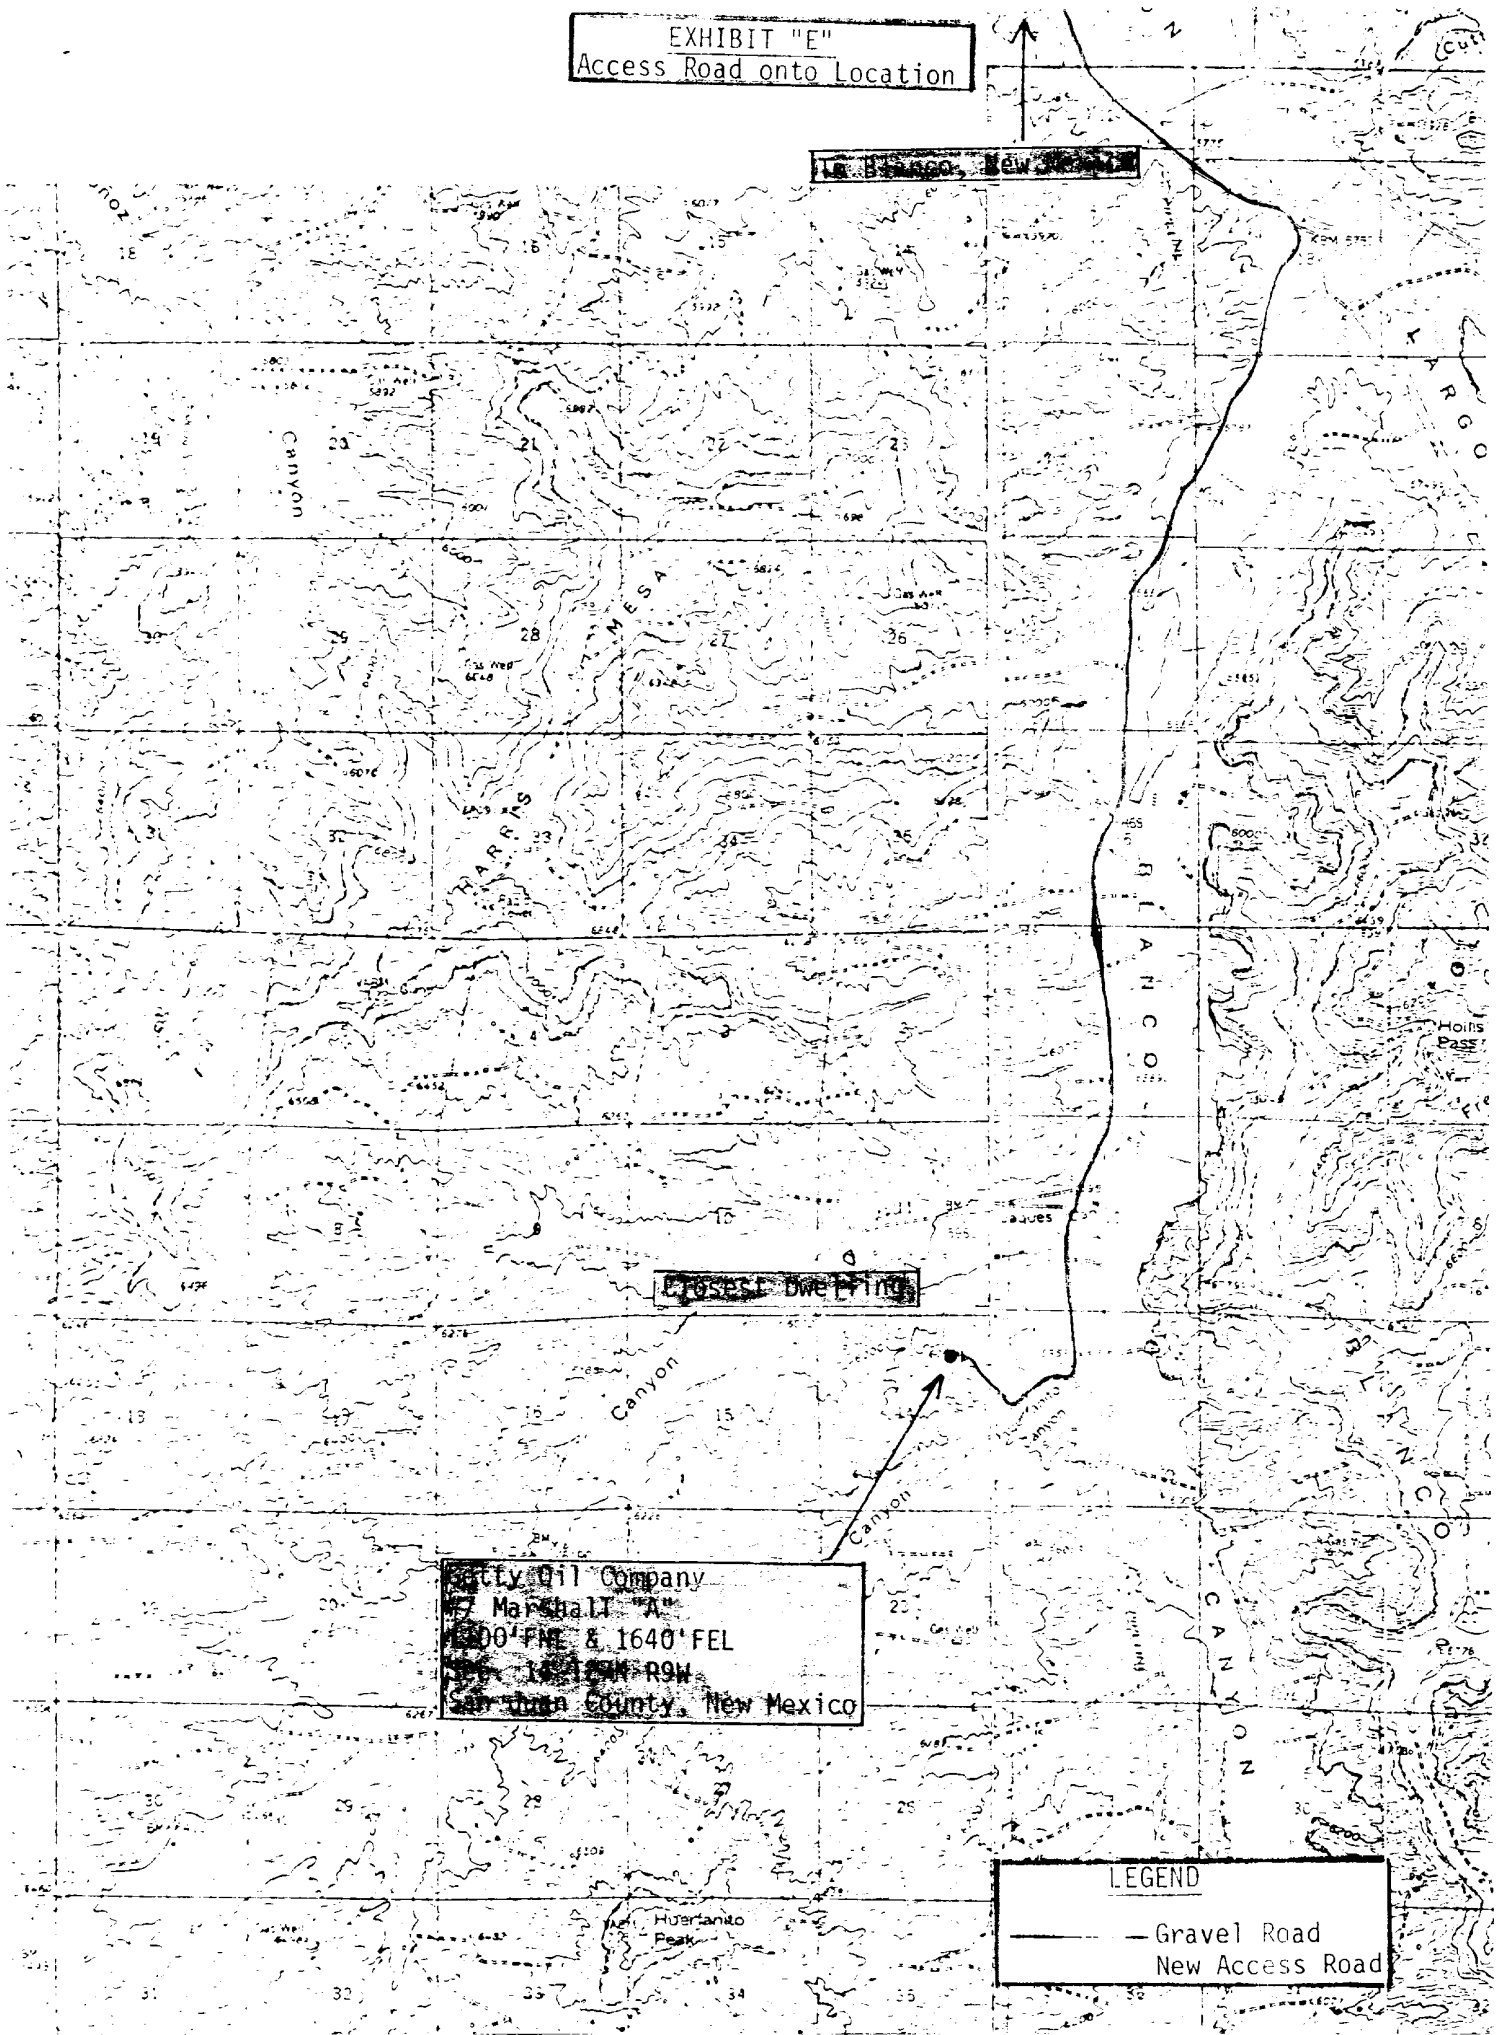

LEGEND




- LOCATION
- ◇ DRY HOLE
- OIL WELL
- ◆ ABANDONED OIL WELL
- △ TRIANGULATION POINT
- ★ OIL & GAS WELL
- ✱ ABANDONED OIL & GAS WELL
- ⊙ GAS WELL
- ⊙ ABANDONED GAS WELL
- ⊗ WATER WELL

EXHIBIT "F" Radius Map of Location

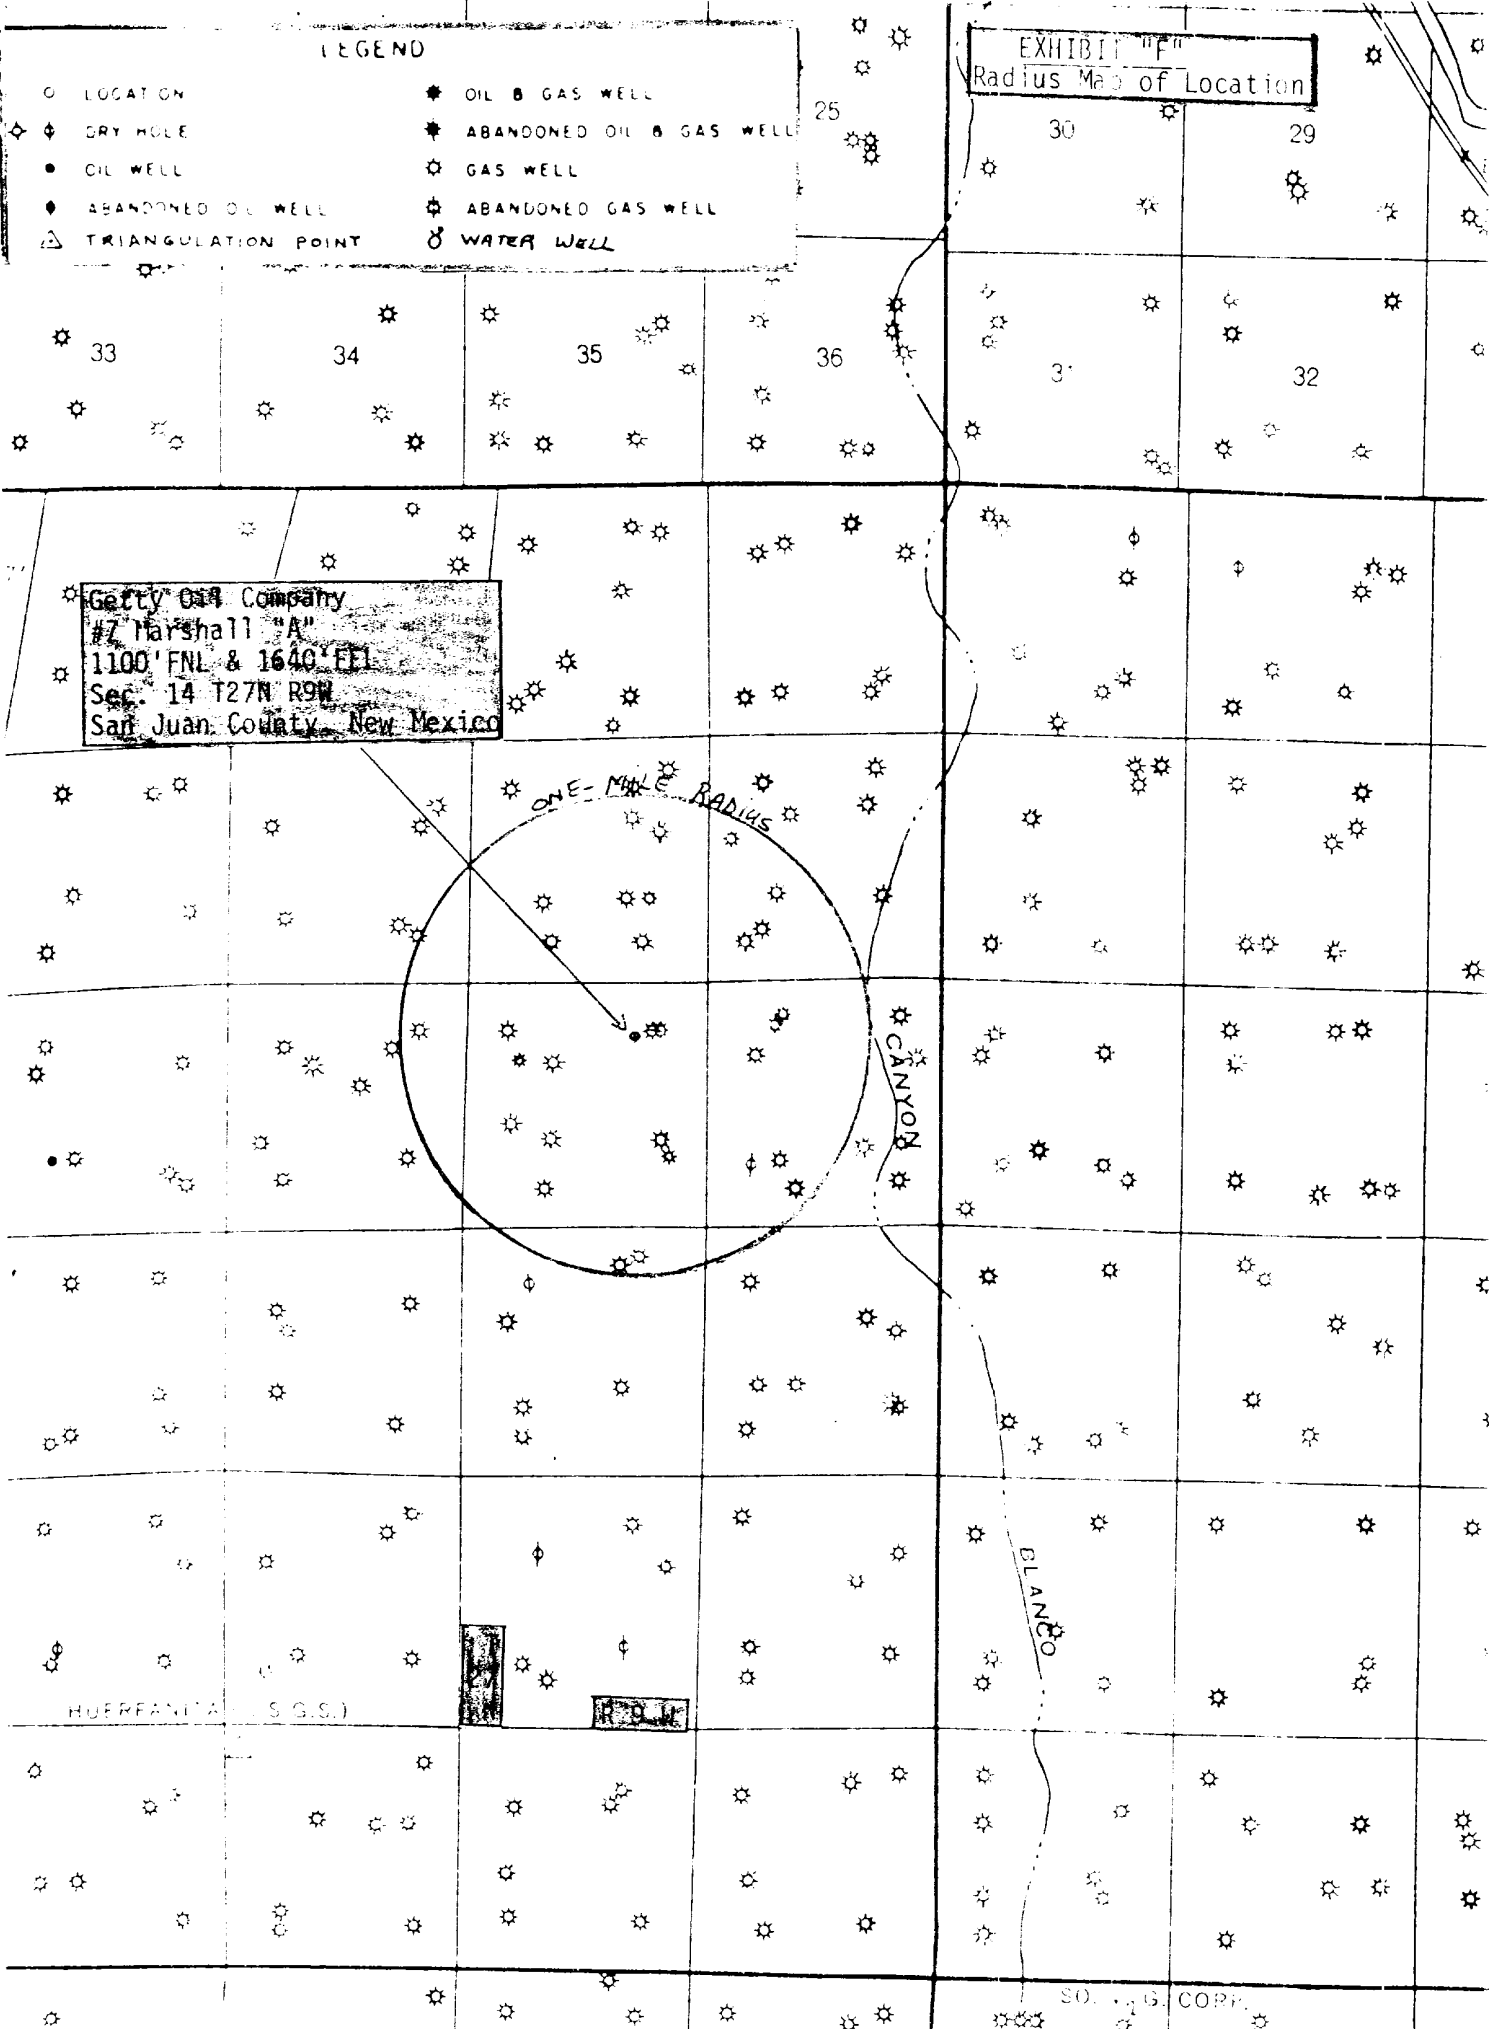


11 12 13 14 15 16 17 18 19 20 21 22 23 24 25 26 27 28 29 30 31 32 33 34 35 36 37 38 39 40 41 42 43 44 45 46 47 48 49 50 51 52 53 54 55 56 57 58 59 60 61 62 63 64 65 66 67 68 69 70 71 72 73 74 75 76 77 78 79 80 81 82 83 84 85 86 87 88 89 90 91 92 93 94 95 96 97 98 99 100 101 102 103 104 105 106 107 108 109 110 111 112 113 114 115 116 117 118 119 120 121 122 123 124 125 126 127 128 129 130 131 132 133 134 135 136 137 138 139 140 141 142 143 144 145 146 147 148 149 150 151 152 153 154 155 156 157 158 159 160 161 162 163 164 165 166 167 168 169 170 171 172 173 174 175 176 177 178 179 180 181 182 183 184 185 186 187 188 189 190 191 192 193 194 195 196 197 198 199 200 201 202 203 204 205 206 207 208 209 210 211 212 213 214 215 216 217 218 219 220 221 222 223 224 225 226 227 228 229 230 231 232 233 234 235 236 237 238 239 240 241 242 243 244 245 246 247 248 249 250 251 252 253 254 255 256 257 258 259 260 261 262 263 264 265 266 267 268 269 270 271 272 273 274 275 276 277 278 279 280 281 282 283 284 285 286 287 288 289 290 291 292 293 294 295 296 297 298 299 300 301 302 303 304 305 306 307 308 309 310 311 312 313 314 315 316 317 318 319 320 321 322 323 324 325 326 327 328 329 330 331 332 333 334 335 336 337 338 339 340 341 342 343 344 345 346 347 348 349 350 351 352 353 354 355 356 357 358 359 360 361 362 363 364 365 366 367 368 369 370 371 372 373 374 375 376 377 378 379 380 381 382 383 384 385 386 387 388 389 390 391 392 393 394 395 396 397 398 399 400 401 402 403 404 405 406 407 408 409 410 411 412 413 414 415 416 417 418 419 420 421 422 423 424 425 426 427 428 429 430 431 432 433 434 435 436 437 438 439 440 441 442 443 444 445 446 447 448 449 450 451 452 453 454 455 456 457 458 459 460 461 462 463 464 465 466 467 468 469 470 471 472 473 474 475 476 477 478 479 480 481 482 483 484 485 486 487 488 489 490 491 492 493 494 495 496 497 498 499 500 501 502 503 504 505 506 507 508 509 510 511 512 513 514 515 516 517 518 519 520 521 522 523 524 525 526 527 528 529 530 531 532 533 534 535 536 537 538 539 540 541 542 543 544 545 546 547 548 549 550 551 552 553 554 555 556 557 558 559 560 561 562 563 564 565 566 567 568 569 570 571 572 573 574 575 576 577 578 579 580 581 582 583 584 585 586 587 588 589 590 591 592 593 594 595 596 597 598 599 600 601 602 603 604 605 606 607 608 609 610 611 612 613 614 615 616 617 618 619 620 621 622 623 624 625 626 627 628 629 630 631 632 633 634 635 636 637 638 639 640 641 642 643 644 645 646 647 648 649 650 651 652 653 654 655 656 657 658 659 660 661 662 663 664 665 666 667 668 669 670 671 672 673 674 675 676 677 678 679 680 681 682 683 684 685 686 687 688 689 690 691 692 693 694 695 696 697 698 699 700 701 702 703 704 705 706 707 708 709 710 711 712 713 714 715 716 717 718 719 720 721 722 723 724 725 726 727 728 729 730 731 732 733 734 735 736 737 738 739 740 741 742 743 744 745 746 747 748 749 750 751 752 753 754 755 756 757 758 759 760 761 762 763 764 765 766 767 768 769 770 771 772 773 774 775 776 777 778 779 780 781 782 783 784 785 786 787 788 789 790 791 792 793 794 795 796 797 798 799 800 801 802 803 804 805 806 807 808 809 810 811 812 813 814 815 816 817 818 819 820 821 822 823 824 825 826 827 828 829 830 831 832 833 834 835 836 837 838 839 840 841 842 843 844 845 846 847 848 849 850 851 852 853 854 855 856 857 858 859 860 861 862 863 864 865 866 867 868 869 870 871 872 873 874 875 876 877 878 879 880 881 882 883 884 885 886 887 888 889 890 891 892 893 894 895 896 897 898 899 900 901 902 903 904 905 906 907 908 909 910 911 912 913 914 915 916 917 918 919 920 921 922 923 924 925 926 927 928 929 930 931 932 933 934 935 936 937 938 939 940 941 942 943 944 945 946 947 948 949 950 951 952 953 954 955 956 957 958 959 960 961 962 963 964 965 966 967 968 969 970 971 972 973 974 975 976 977 978 979 980 981 982 983 984 985 986 987 988 989 990 991 992 993 994 995 996 997 998 999 1000 1001 1002 1003 1004 1005 1006 1007 1008 1009 1010 1011 1012 1013 1014 1015 1016 1017 1018 1019 1020 1021 1022 1023 1024 1025 1026 1027 1028 1029 1030 1031 1032 1033 1034 1035 1036 1037 1038 1039 1040 1041 1042 1043 1044 10

Access

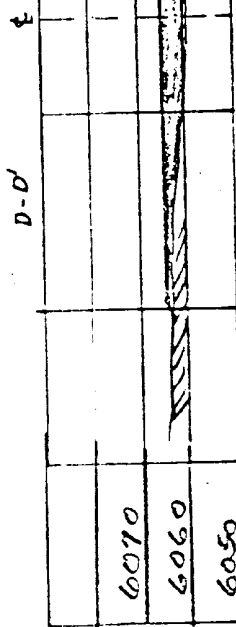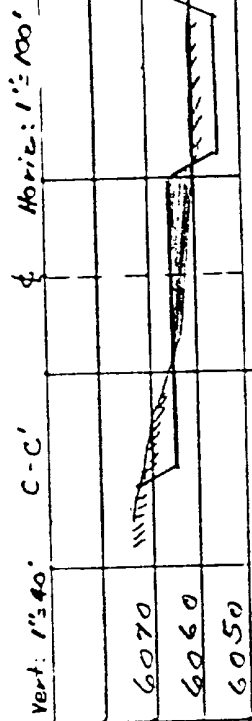

Date: 5/31/79

EXHIBIT "H"
Drill Rig Layout

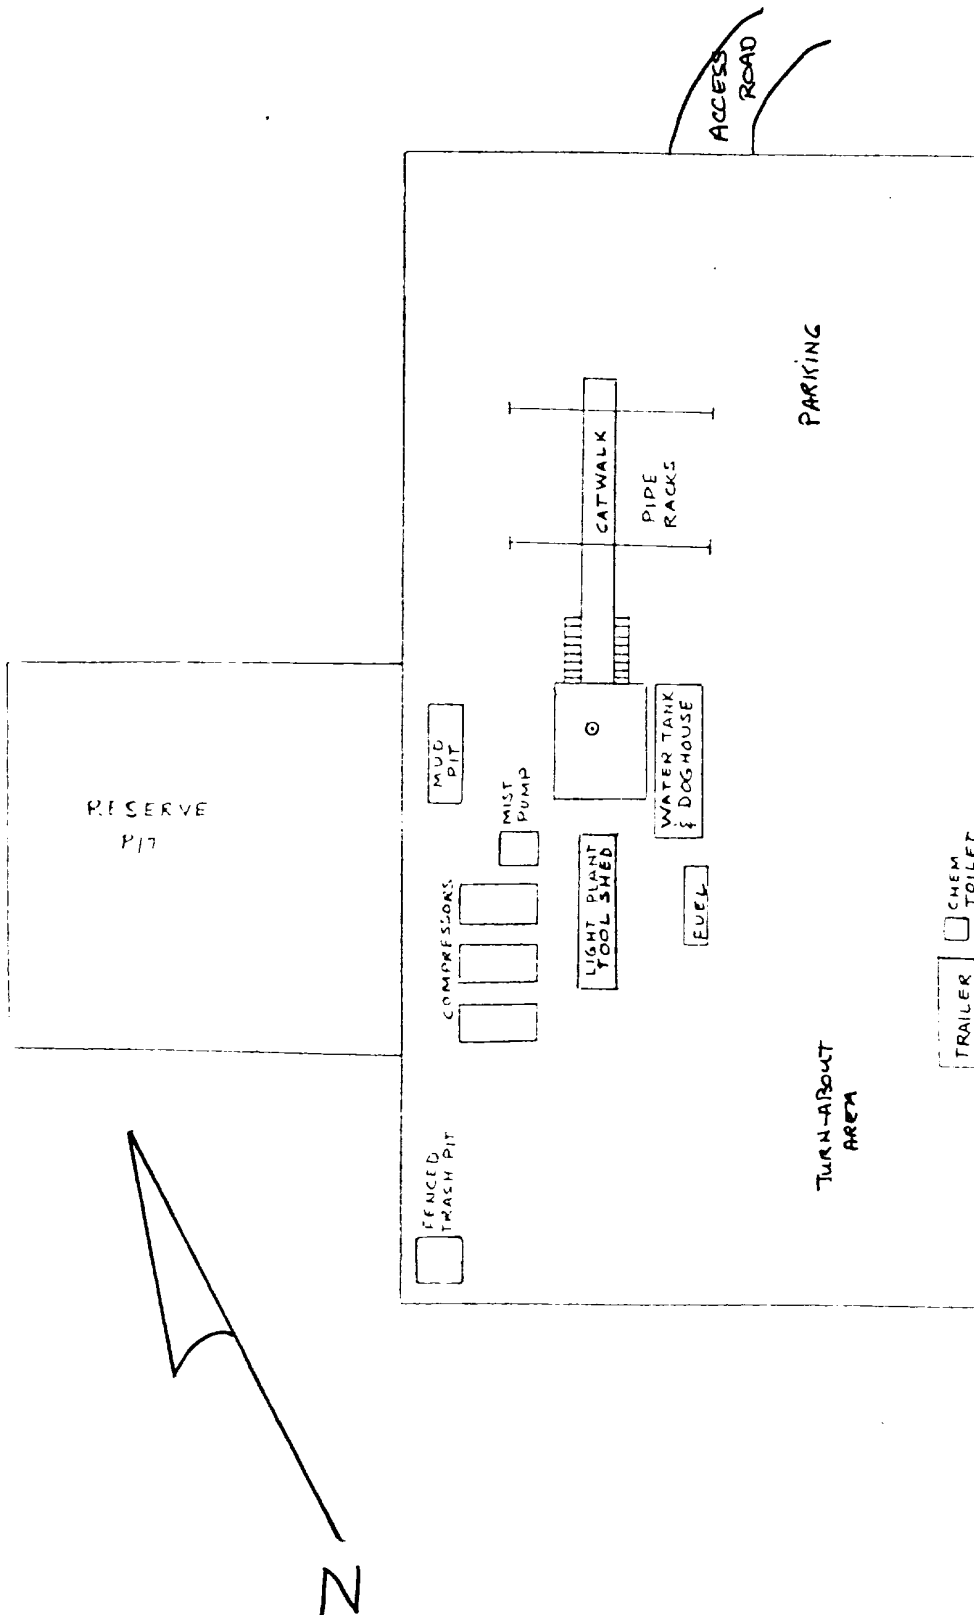

SCALE 1" = 50'

EXHIBIT "K"
Gracing Program
Layout

