

UNITED STATES
DEPARTMENT OF THE INTERIOR
GEOLOGICAL SURVEY

SUNDRY NOTICES AND REPORTS ON WELLS

(Do not use this form for proposals to drill or to deepen or plug back to a different reservoir. Use Form 9-331-C for such proposals.)

1. oil well <input type="checkbox"/> gas well <input checked="" type="checkbox"/> other
2. NAME OF OPERATOR J. Gregory Merrion & Robert L. Bayless
3. ADDRESS OF OPERATOR P.O. Box 1541, Farmington, NM 87401
4. LOCATION OF WELL (REPORT LOCATION CLEARLY. See space 17 below.) AT SURFACE: 1740 FSL and 820 FEL AT TOP PROD. INTERVAL: same AT TOTAL DEPTH: same
16. CHECK APPROPRIATE BOX TO INDICATE NATURE OF NOTICE, REPORT, OR OTHER DATA


REQUEST FOR APPROVAL TO:	SUBSEQUENT REPORT OF:
TEST WATER SHUT-OFF <input type="checkbox"/>	<input type="checkbox"/>
FRACTURE TREAT <input type="checkbox"/>	<input type="checkbox"/>
SHOOT OR ACIDIZE <input type="checkbox"/>	<input type="checkbox"/>
REPAIR WELL <input type="checkbox"/>	<input type="checkbox"/>
PULL OR ALTER CASING <input type="checkbox"/>	<input type="checkbox"/>
MULTIPLE COMPLETE <input type="checkbox"/>	<input type="checkbox"/>
CHANGE ZONES <input type="checkbox"/>	<input type="checkbox"/>
ABANDON* <input type="checkbox"/>	<input type="checkbox"/>
(other) Spud, Cement	

5. LEASE NOO-C-14-20-7471
6. IF INDIAN, ALLOTTEE OR TRIBE NAME Navajo Allotted
7. UNIT AGREEMENT NAME
8. FARM OR LEASE NAME Pete
9. WELL NO. 1
10. FIELD OR WILDCAT NAME WAW Fruitland Pic. Cliffs
11. SEC., T., R., M. OR BLK. AND SURVEY OR AREA Sec. 35, T27N, R12W
12. COUNTY OR PARISH San Juan
13. STATE N.M.
14. API NO.
15. ELEVATIONS (SHOW DE KDB AND WD) 5935' GL

(NOTE: Report results of multiple completion or zone change on Form 9-330.)

17. DESCRIBE PROPOSED OR COMPLETED OPERATIONS (Clearly state all pertinent details, and give pertinent dates, including estimated date of starting any proposed work. If well is directionally drilled, give subsurface locations and measured and true vertical depths for all markers and zones pertinent to this work.)*

10-08-79 Move in L & B Speed Drill.
10-09-79 Spud 9-3/4" surface hole to 98 ft. Set 98 ft. of 7" 23 lb./ft., J-55 surface casing with 50 sacks Class "A" cement with 3% CACL₂. WOC
10-10-79 Drilling at 600 ft.
10-11-79 Drilling at 1100 ft.
10-12-79 Drilled to TD @ 1245 ft. Ran 1245 ft. of 4-1/2" 9.5 lb./ft. casing. Cemented with 150 sacks, circulated to surface. WOC.

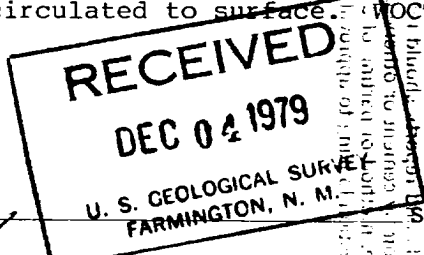

Subsurface Safety Valve: Manu. and Type

18. I hereby certify that the foregoing is true and correct

SIGNED

TITLE

Co-Owner

DATE

12-03-79

(This space for Federal or State office use)

APPROVED BY

TITLE

DATE

CONDITIONS OF APPROVAL, IF ANY:

NMOCC

APPROVED

*See Instructions on Reverse Side

DEC 7 1979
JAMES F. SIMS
DISTRICT OIL & GAS SUPERVISOR

RECEIVED
JUN 10 1964
U.S. DEPARTMENT OF AGRICULTURE
WASHINGTON, D.C.

APPROVED