Form approved. Budget Bureau No. 42-R1425.

(Other instructions on reverse side)

## UNITED STATES

(May 1963)		ED STATES OF THE INTE	Other instruc reverse sid		30-045-	- 23849	
			LINION		5. LEASE DESIGNATION	AND SERIAL NO.	
		GICAL SURVEY			SF 078390	SE OR TRIBE NAME	
APPLICATIO	ON FOR PERMIT T	O DRILL, DEE	PEN, OR PLUG B	ACK			
	RILL 🛎	DEEPEN	PLUG BAC	K □:	7. UNIT AGREEMENT	NAME	
b. TYPE OF WELL	GAS X OTHER		SINGLE X MULTIPI	re 🗌	8. FARM OR LEASE N.	AME	
WELL WELL OTHER ZONE 2. NAME OF OPERATOR					Jones A		
	Natural Gas Co	mpany			9. WELL NO.	,	
3. ADDRESS OF OPERATOR					13		
PO Box 2	89, Farmingtor	1, NM 87401			10. FIELD AND FOOL, OR WILDCAT		
4. LOCATION OF WELL At surface	(Report location clearly and		y State requirements.*)		So.Blanco Pic.Cliffs		
1	900's, 109	90 ° W			AND SURVEY OR	AREA	
At proposed prod. 2	zone					28-N,R-8-W	
	Same s and direction from Nea	DEST TOWN OR POST OF	FICE*		NMPM 12. COUNTY OR PARIS	H   13. STATE	
					San Juan	NM	
/.5 Mlle	s southeast of		NO. OF ACRES IN LEASE		OF ACRES ASSIGNED	INM	
LOCATION TO NEAR PROPERTY OR LEAS	EST	900	937.20	то т	HIS WELL	147.60 —	
(Also to nearest of	irlg. unit line, if any)		PROPOSED DEPTH	20. ROTA	RY OR CABLE TOOLS		
TO NEAREST WELL OR APPLIED FOR, ON	, DRILLING, COMPLETED,	600	2685 <b>'</b>	Rotar	cy.		
	whether DF, RT, GR, etc.)			<del>'</del>	22. APPROX. DATE V	VORK WILL START*	
23.		PROPOSED CASING A	AND CEMENTING PROGRA	AM			
			SETTING DEPTH	1	QUANTITY OF CEM	ENT	
SIZE OF HOLE	SIZE OF CASING	WEIGHT PER FOOT		1.06	06 cu.ft.circ. to surface		
12 1/4"	8 5/8"	24.0#	120'	TOP	u.it.circ.	_to_surrace	
7 7/8" 6 1/4"	2 7/8" 2 7/8"	6.4#	2300-2685	432 cu.ft.to cover Ojo Alam			
Selectiv	ely perforate		ter fracture t			\	
. A 3000 p	si WP and 6000	) psi test d	louble gate pro	evente	equipped	.with	
blind an	d pipe rams wi	ill be used	for blow out	prever		18 10	
			1		5 1/2 Not 2 /		
This sa	ia dodiastod		N.		6.8		
This gas	is dedicated	•	1		SINO	1070	
			ž,	บรูเรี	0	CT 219/9	
			j.	۲.	1 00	CON. COM.	
The $SW/4$	of Section 10	) is dedicat	ed to this we	11.	/Oii	DIST. 3	
IN ABOVE SPACE DESCRIPTION. If proposal is	RIBE PROPOSED PROGRAM: If to drill or deepen direction	proposal is to deepen	or plug back, give data on p ta on subsurface locations a	resent pro	ductive zone and proper ed and true vertical de	osed new productive	
preventer program, if 24.	1 1 2 -				~		
SIGNED	V. J. Suse	TITLE .	Drillin	g Cle	rk date 9	-20-79	
. (This space for F	'ederal or State office use)						
			APPROVAL DATE				

oh Frak

mil Tuy

mmoce

\*See Instructions On Reverse Side

# STATE OF NEW MEXICO P. O. BOX 2088 [HERGY AND MINERALS DEFARIMENT SANTA FE, NEW MEXICO 87501]

Form C-102 Revised 10-1

	_	All distances must be from	the cuter boundaries	el the Section.		
Operator	<del></del>	) I	egse			Well No.
EL PASO N.	ATURAL GAS CO	MPANY	JONES "A"	(SF-	078390)	13
Unit Letter	Section	Township	Range	County		
M	10	28N	8w	San	Juan	
Actual Footage Loc	•	•		:		
900		South line and	1090	feet from the	West	line
Ground Level Elev.	Producing Fo	URED CLIFFS	Pool	DTCMIDTID O		tated Acreage:
	<del></del>		SO. BLANCO			47.60 Acte.
1. Outline th	e acreage dedica	ited to the subject wel	I by colored penci	l or hachure	marks on the pla	t below.
·			•			
	ian one lease is nd royalty).	dedicated to the well,	outline each and	identify the c	wnership thereo	f (both as to working
2.11			3 3			, , , , , , , , , , , , , , , , , , , ,
		lifferent ownership is de		il, have the i	nterests of all o	wners been consoli-
dated by c	ommunitization,	unitization, force-poolin	g. etc:			
Yes	□ No If a	nswer is "yes;" type of	consolidation			۴
1c3		asher is yes, type or		<del></del>		
If answer	is "no!" list the	owners and tract descri	ptions which have	actually bee	n consolidated	(Use reverse side of
	f necessary.)					
	•	ed to the well until all	interests have bee	n consolidate	ed (by communit	ization, unitization
		or until a non-standard			,	
sion.	5.				,	sign by the dominis-
				5	CER	TIFICATION
	•					
					1 hereby certify	that the information con-
					1	true and complete to the
					best of my know	ledge and belief.
					1 11	Buses
					DV. /2.	mee
					Drilling (	Clerk
					Position	atural Gas Co.
					Company September	<del></del>
					pehcemper	20; 17/7
				;	Date	
•		,				
_		<del>- x- x- x- z</del>		1	1	
		××× XI	100		1	that the well location
K	i V	K	1 3	l l		lat was plotted from field
K	· · · · · ·	K ·	1 2 1		ł.	surveys made by me or
	SF-079938	K	etteri	1		ision, and that the same
	017730	Kl	F	]	i	rect to the best of my
1	i ,	N		<b>7</b>	knowledge and b	enet.
7	+	K	/		}	
1090'	1	И	L. Service	Į.	ļ	
X	<b>-</b> φ !	Ŋ	an a the attraction	1	Date Surveyed	
k	SF-0783	390 KJ	1	1!	June 28, 1	979
1	- (	Kl	1	į	Registered Profes	` ` ` `
1	잃 !	k)	1		and/or Land Surve	[[]]
K	1	KI	1	- * - <b> </b>	diene 12	(至人)是)
X-X-X-X	<del>\\\\\\\\\\\\\\\\\\\\\\\\\\\\\\\\\\\\\</del>	~~~			Fred B. Ko	rr Jr
Total Control of the					Certificate No.	7 32 m
0 330 660	00 1320 1650 191	13 2310 2643 2000	1500 1000	500 0	3950	1 19 11 11 1 1 1 1 1 1 1 1 1 1 1 1 1 1
	-					



P. O. BOX 990 FARMINGTON, NEW MEXICO 87401 PHONE: 505-325-2841

#### Multi-Point Surface Use Plan

#### Jones A #13

- 1. Existing Road Please refer to Map No. 1 which shows the existing roads. New roads which will be required have been marked on this map.

  All existing and new roads will be properly maintained during the duration of this project.
- 2. Planned Access Roads Please refer to Map No. 1. The grade of the access roads will be consistent with that of the local terrain. The road surface will not exceed twenty feet (20') in width. Upon completion of the project, the access road will be adequately drained to control soil erosion. Drainage facilities may include ditches, water bars, culverts or any other measure deemed necessary by trained Company personnel to insure proper drainage. Gates and/or cattleguards will be installed if necessary.
- 3. Location of Existing Wells Please refer to Map No. 2.
- 4. Location of Tank Batteries, Production Facilities, and Production Gathering and Service Lines Please refer to Maps No. 1 and No. 2.

  Map No. 2 shows the existing gas gathering lines. Map No. 1 shows the existing roads and new proposed access roads. All known production facilities are shown on these two maps.
- 5. Location and Type of Water Supply Water for the proposed project will be obtained from Ten Mile Crossing Water Hole North.
- 6. Source of Construction Materials No additional materials will be required to build either the access road or the proposed location.
- 7. Methods of Handling Waste Materials All garbage and trash materials will be put into a burn pit shown on the attached Location Plat No. 1. When clean-up operations are begun on the proposed project, the burn pit with its refuse will be buried to a depth of at least three feet (3'). A latrine, the location of which is also shown on Plat No. 1,

7. cont'd.

will be provided for human waste. If large amounts of liquids are left in the reserve pit after completion of the project, the pit will be fenced until the liquids have had adequate time to dry. The location clean-up will not take place until such time as the reserve pit can be properly covered over to prevent run-off from carrying any of these materials into the watershed. No earthen pit will be located on natural drainages; all earthen pits will be so constructed as to prevent leakage from occurring.

- 8. Ancillary Facilities No camps or airstrips will be associated with this project.
- 9. Wellsite Layout Please refer to the attached Plat No. 1.
- 10. Plans for Restoration of the Surface After completion of the proposed project, the location will be cleaned and leveled. The location will be left in such a condition that will enable reseeding operations to be carried out. Seed mixture as designated by the responsible government agency will be used. The reseeding operation will be performed during the time period set forth by the regulatory body. The location production equipment will be painted as designated by the responsible government agency.
- 11. Other Information The terrain is rolling hills with cedar and pinon growing. Cattle, deer and sheep are seen occasionally on the proposed project site.
- 12. Operator's Representative W.D. Dawson, PO Box 990, Farmington, NM
- 13. Certification -

I hereby certify that I, or persons under my direct supervision, have inspected the proposed drillsite and access route; that I am familiar with the conditions which presently exist; that the statements made in this plan are, to the best of my knowledge, true and correct; and that the work associated with the operations proposed herein will be performed by El Paso Natural Gas Company and its contractors and sub-contractors in conformity with this plan and the terms and conditions under which it is approved.

L. A. Aimes

Project Drilling Engineer

I. Location: 900'S, 1090'W, Section 10, T-28-N, R-8-W, San Juan County, NM

Field: So.Blanco Pictured Cliffs Elevation: 6024'GL

#### II. Geology:

A. Surface Formation: San Jose

Sub-surface Formation Tops:

Ojo Alamo 1540' Pictured Cliffs 2500' Kirtland 1660' Lewis 2645' Fruitland 2205' Total Depth 2685'

- B. Logging Program: Induction Electric and Gamma Ray Density at TD.
- C. Coring: none
- D. Testing: none

#### III. Drilling:

A. Anticipated Starting Date and Duration of the Project:

1980 Drilling Program - approximately 4 days to complete.

B. Circulating Medium: Treated water and a low solids gel base mud will be used from surface to TD.


#### IV. Materials:


Α.	Casing Program:	Hole Size	Depth	Csg.Size	Wt.&Grade
		12 1/4" 7 7/8"	120'	8 5/8"	24.0# J-55
		6 1/4"	2300 <b>'</b> 2685 <b>'</b>	2 7/8" 2 7/8"	6.4# J-55 6.4# J-55

- B. Float Equipment: 8 5/8" surface casing cement guide shoe.
  - 2 7/8" production casing 10' shoe joint with notched collar for guide shoe and 2 7/8" latch down baffle on top. Two 3 1/16" balls and one 2 7/8" latch down plug.
- C. Tubing: none
- D. Wellhead Equipment: 8 5/8" x 2 7/8" 2000 psi WOG casing head.

#### V. Cementing:


- 8 5/8" surface casing 90 sks. of Class "B" cement with 1/4# gel-flake per sack and 3% calcium chloride (106 cu.ft. of slurry, 100% excess to circulate to surface). WOC 12 hrs. Test casing wellhead and BOP to 600#/30 minutes.
- 2 7/8" production precede cement with 5 bbls. water. Cement with 211 sks. of 65/35 Class "B" Poz with 6% gel and 8.3 gallons water per sack followed by 65 sks. 50/50 Class "B" Poz with 2% gel (432 cu.ft. of slurry, 50% excess to cover Ojo Alamo). Spot 50 gallons of 7 1/2% acetic acid on top of plugs. Run temperature survey after 12 hours.

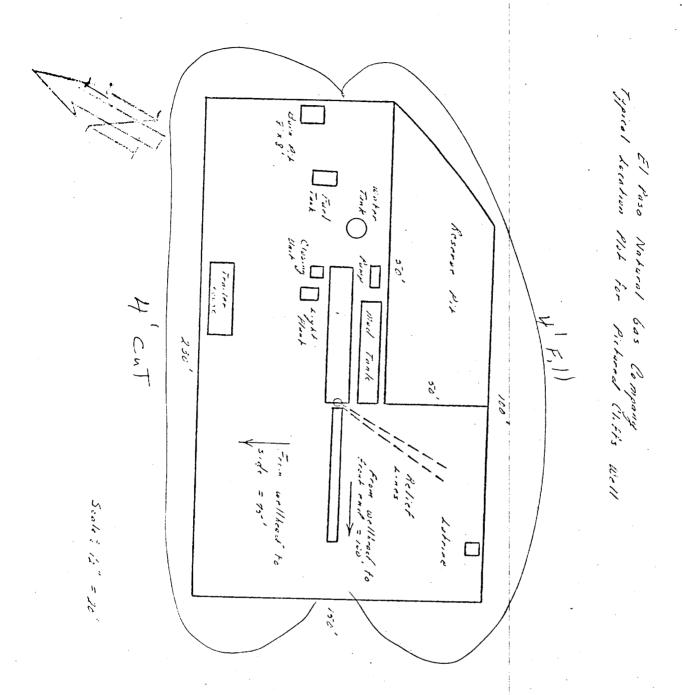

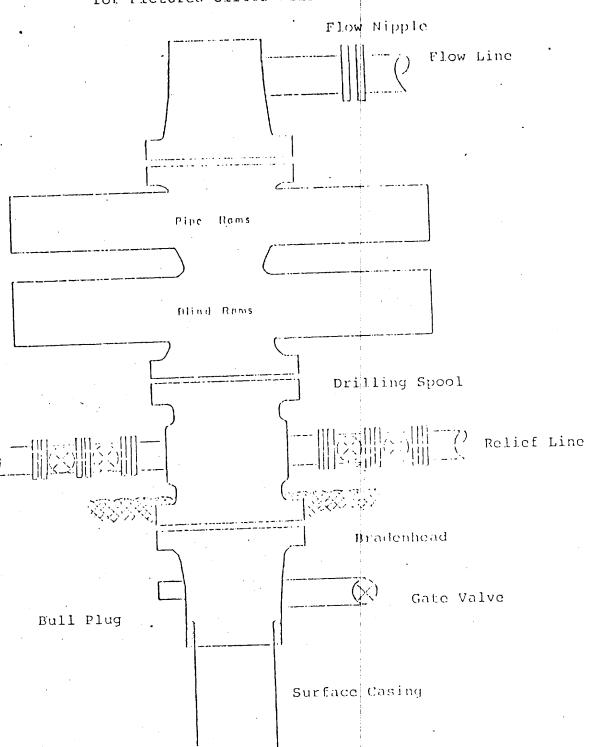

8" Series 900 Double Gate BOP, rated at 3000 psi Working Pressure

### EL PASO NATURAL GAS COMPANY Jones A #13 SW 10-28-8

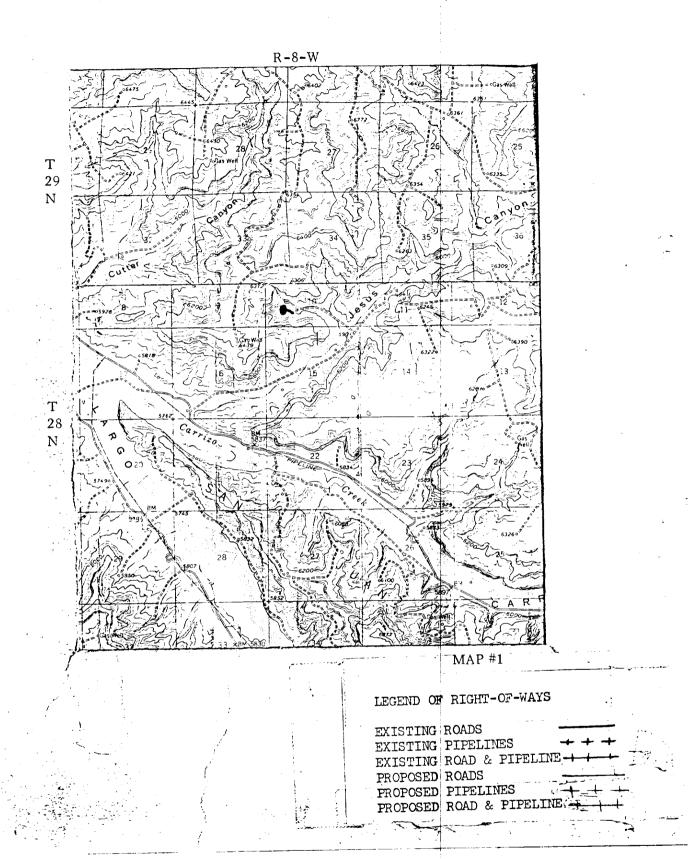

EL PASO NATURAL GAS COMPANY

Jones A #13

SW 10-28-8

Proposed Location