SUBMIT IN TRIPLICATE\*

(Other instructions on reverse side)

Form approved. Budget Bureau No. 42-R1425.

## **UNITED STATES**

30-045-23925

DEPARTMENT OF THE INTERIOR  GEOLOGICAL SURVEY				5. LEASE DESIGNATION AND SERIAL NO. SF 078390A		
APPLICATION FOR PERMIT TO DRILL, DEEPEN, OR PLUG BACK				6. IF INDIAN, ALLOTTEE OR TRIBE NAME		
b. TYPE OF WELL	RILL *	DEEPEN [		IG BACK		
OIL GAS WELL OTHER SINGLE OUTPLE OTHER ZONE ZONE				8. FARM OR LEASE NAME Hardie		
El Paso Natural Gas Company					9. WELL NO.	
PO Box 289, Farmington, NM 87401				2A  10. FIELD AND POOL, OR WILDCAT		
4. LOCATION OF WELL (Report location clearly and in accordance with any State requirements.*)				Blanco Mesa Verde		
At proposed prod. 20		350.M		•	11. SEC., T., R., M., OR BLE. AND SURVEY OR AREA Sec. 14, T-28-N, R-8-W	
14. DISTANCE IN MILES	Same And direction from Nea	REST TOWN OR POST	r office*		NMPM 12. COUNTY OR PARISH   13. STATE	
10 miles e	ast of Blanco	NM I	16. NO. OF ACRES IN	LEASE 17	San Juan NM . NO. OF ACRES ASSIGNED	
PROPERTY OR LEASE (Also to nearest dri	LINE, FT. g. unit line, if any)	790'	614.	72	320.00	
18. DISTANCE FROM PROT TO NEAREST WELL, I OR APPLIED FOR, ON TE	DRILLING, COMPLETED,	4001	19. PROPOSED DEPTH	_	. ROTARY OR CABLE TOOLS	
21. ELEVATIONS (Show wh	· ·	400'	5406	· IRo	22. APPROX. DATE WORK WILL START*	
6216'GL						
23.	I	PROPOSED CASIN	G AND CEMENTING	PROGRAM		
SIZE OF HOLE	SIZE OF CASING	WEIGHT PER FO	OOT SETTING DE	РТН	QUANTITY OF CEMENT	
<del>- 13 3/4"</del>	9 5/8"	36.0#			cu.ft. to circulate	
8 3/4" 6 1/4"	7" 4 1/2"line	20.0# r 10.5#	2930-54		94 cu.ft.to cover Ojo Al 32 cu.ft.to circ.liner	
A 3000 psi blind and This gas i	WP and 6000	psi test l be used W MEXICO ORDE	double gate I for blow o	prever	Mesa Verde formation.  Inter equipped with vention on this well.  NOV 01 1979  S GEORGIAL SURVENOV 5 1979	
A 3000 psi blind and  This gas i  THICHAL WELL NEED!  3.3. RAVIFICATION D  The W/2 of IN ABOVE SPACE DESCRIBING STATE OF PROPOSED IS to preventer program, if an 24.  SIGNED STATE OF Federal Control of the proposed is to preventer program, if an 24.	WP and 6000 pipe rams will s dedicated.  ED PURSUANT TO NEW ATED FEBRUARY 22, Section 14 is proposed PROGRAM: If I drill or deepen directions by.	psi test 1 be used V MEXICO ORDE 1979. Is dedicat proposal is to deep	double gate for blow of the for blow of the form of th	preverut prevenut pre	s. GECLOCUAL SURVENOV 5 1979 S. GECLOCUAL SUR	
A 3000 psi blind and  This gas i  THICHAL WELL NEED!  3.3. RAVIFICATION D  The W/2 of IN ABOVE SPACE DESCRIBING STATE  Zone. If proposal is to preventer program, if an 24.  BIGNED	WP and 6000 pipe rams will s dedicated.  ED PURSUANT TO NEW ATED FEBRUARY 22, Section 14 is proposed PROGRAM: If profile or deepen directions by.	psi test l be used  W MEXICO ORDE 1979. Ls dedicat proposal is to deep	double gate for blow of RR-1670-T.  Led to this en or plug back, give didata on subsurface loc	prevenut pre	s. GECLOCUAL SURVENOV 5 1979 S. GECLOCUAL SUR	

ohzana

NMUCC

\*See Instructions On Reverse Side

#### 1980 Form C-102 Supersedes C-125 Effective 1-1-65

# NEW MEXICO OIL CONSERVATION COMMISSION WELL LOCATION AND ACREAGE DEDICATION PLAT

All distances must be from the outer boundaries of the Section. Operator Lease Well No. EL PASO NATURAL GAS COMPANY HARDIE (SF-078390-A) 2A Unit Letter Section Township Range County 28-N 8-W SAN JUAN Actual Footage Location of Well: 1790 NORTH 1850 feet from the WEST line and feet from the Ground Level Elev. Producing Formation Dedicated Acreage: 6216 MESA VERDE BLANCO MESA VERDE 320.00 1. Outline the acreage dedicated to the subject well by colored pencil or hachure marks on the plat below. 2. If more than one lease is dedicated to the well, outline each and identify the ownership thereof (both as to working interest and royalty). 3. If more than one lease of different ownership is dedicated to the well, have the interests of all owners been consolidated by communitization, unitization, force-pooling. etc? Yes ☐ No If answer is "yes," type of consolidation \_ If answer is "no," list the owners and tract descriptions which have actually been consolidated. (Use reverse side of this form if necessary.). No allowable will be assigned to the well until all interests have been consolidated (by communitization, unitization, forced-pooling, or otherwise) or until a non-standard unit, eliminating such interests, has been approved by the Commission. CERTIFICATION I hereby certify that the information contained herein is true and complete to the best of my knowledge and belief. Paso Natural Gas Co 1850' SF-078390-A October 29, №N 14 SECT I hereby certify that the well location shown on this plat was plotted from field notes of actual surveys made by me or o<sup>D #2</sup> under my supervision, and that the same is true and correct to the best of my knowledge and belief. Date Surveyed January 12, 1977 Registered Professional Engine 

1000

500

1320 1650

1980 2310

#### Operations Plan Hardie D #2A

I. Location: 1790'N, 1850'W, Section 14, T-28-N, R-8-W, San Juan County, NM

Field: Blanco Mesa Verde Elevation: 6226'GL

#### II. Geology:

A.	Formation Tops:	Surface	San Jose	Lewis	2880 <b>'</b>
		Ojo Alamo	1828	Mesa Verde	4362'
		Kirtland	1916'	Menefee	4502
		Fruitland	2475'	Point Lookout	4956 1
		Pic.Cliffs	2755 <b>'</b>	Total Depth	5406'

- B. Logging Program: GR-Ind. and GR-Density at Total Depth.
- C. Coring Program: none
- D. Natural Gauges: 4350', 4490', 4945' and at Total Depth.
  Also gauge any noticeable increase in gas. Record all gauges in daily drilling report and on morning report.

#### III. Drilling:

A. Mud Program: mud from surface to 3080'. Gas from intermediate casing to Total Depth.

#### IV. Materials:

Α.	Casing Program:	Hole Size	Depth	Casing Size	Wt.&Grade
		13 3/4"	2001	9 5/8"	36.0# H-40
		8 3/4"	3080'	7"	20.0# K-55
		6 1/4"	2930-5406'	4 1/2"	10.5# K-55

B. Float Equipment: 9 5/8" surface casing - cement quide shoe.

7" intermediate casing - cement guide shoe and self-fill insert float valve, 5 stabilizers every other joint above shoe. Run float two joints above shoe.

- 4 1/2" liner 4 1/2" liner hanger with neoprene packoff. Geyser shoe and flapper type float collar
- C. Tubing: 5375' of 2 3/8", 4.7#, J-55 8rd EUE tubing with a common pump seating nipple one joint above bottom. Tubing will be open ended.
- D. Wellhead Equipment: 10"  $2000 \times 9 = 5/8$ " casing head. 10"  $2000 \times 6$ "  $2000 \times 10^{-2}$  xmas tree.

#### V. Cementing:

9 5/8" surface casing - use 190 sks. of Class "B" cement with 1/4# gel-flake per sack and 3% calcium chloride (224 cu.ft. of slurry, 100% excess to circulate to surface). WOC 12 hours. Test casing to 600#/30 minutes.

7" intermediate casing - use 355 sks. of 65/35 Class "B" Poz with 6% gel and 2% calcium chloride (8.3 gallons of water per sack) followed by 100 sks. of Class "B" with 2% calcium chloride (694 cu.ft. of slurry, 50% excess to cover Ojo Alamo). Run temperature survey at 8 hours. WOC 12 hours. Test casing to 1200#/30 minutes.

4 1/2" liner - precede cement with 20 barrels of gel water (2 sks. gel) Cement with 3llsks. of 50/50 Class "B" Poz with 2% gel, 0.6% Halad-9, 6.25# gilsonite plus 1/4# Flocele per sack (432 cu.ft. of slurry, 70% excess to circulate liner). WOC 18 hours.



P. O. BOX 990 FARMINGTON, NEW MEXICO 87401 PHONE: 505-325-2841

#### Multi-Point Surface Use Plan

#### Hardie D #2A

- 1. Existing Road Please refer to Map No. 1 which shows the existing roads. New roads which will be required have been marked on this map.

  All existing and new roads will be properly maintained during the duration of this project.
- 2. Planned Access Roads Please refer to Map No. 1. The grade of the access roads will be consistent with that of the local terrain. The road surface will not exceed twenty feet (20') in width. Upon completion of the project, the access road will be adequately drained to control soil erosion. Drainage facilities may include ditches, water bars, culverts or any other measure deemed necessary by trained Company personnel to insure proper drainage. Gates and/or cattleguards will be installed if necessary.
- 3. Location of Existing Wells Please refer to Map No. 2.
- 4. Location of Tank Batteries, Production Facilities, and Production
  Gathering and Service Lines Please refer to Maps No. 1 and No. 2.

  Map No. 2 shows the existing gas gathering
  lines. Map No. 1 shows the existing roads and
  new proposed access roads. All known production
  facilities are shown on these two maps.
- 5. Location and Type of Water Supply Water for the proposed project will be obtained from Manzaneras Water Hole.
- 6. Source of Construction Materials No additional materials will be required to build either the access road or the proposed location.
- 7. Methods of Handling Waste Materials All garbage and trash materials will be put into a burn pit shown on the attached Location Plat No. 1. When clean-up operations are begun on the proposed project, the burn pit with its refuse will be buried to a depth of at least three feet (3'). A latrine, the location of which is also shown on Plat No. 1,

7. cont'd.

will be provided for human waste. If large amounts of liquids are left in the reserve pit after completion of the project, the pit will be fenced until the liquids have had adequate time to dry. The location clean-up will not take place until such time as the reserve pit can be properly covered over to prevent run-off from carrying any of these materials into the watershed. No earthen pit will be located on natural drainages; all earthen pits will be so constructed as to prevent leakage from occurring.


- 8. Ancillary Facilities No camps or airstrips will be associated with this project.
- 9. Wellsite Layout Please refer to the attached Plat No. 1.
- 10. Plans for Restoration of the Surface After completion of the proposed project, the location will be cleaned and leveled. The location will be left in such a condition that will enable reseeding operations to be carried out. Seed mixture as designated by the responsible government agency will be used. The reseeding operation will be performed during the time period set forth by the regulatory body. The location production equipment will be painted as designated by the responsible government agency.
- 11. Other Information The terrain is rough and rocky sandstone ledges with cedar and pinon growing. Deer and sheep are occasionally seen on the proposed project site.
- 12. Operator's Representative W.D. Dawson, PO Box 990, Farmington, NM
- 13. Certification -

I hereby certify that I, or persons under my direct supervision, have inspected the proposed drillsite and access route; that I am familiar with the conditions which presently exist; that the statements made in this plan are, to the best of my knowledge, true and correct; and that the work associated with the operations proposed herein will be performed by El Paso Natural Gas Company and its contractors and sub-contractors in conformity with this plan and the terms and conditions under which it is approved.


L. A. Aimes

Project Drilling Engineer

### Typical B.O.P. Installation for Mesa Verde Well

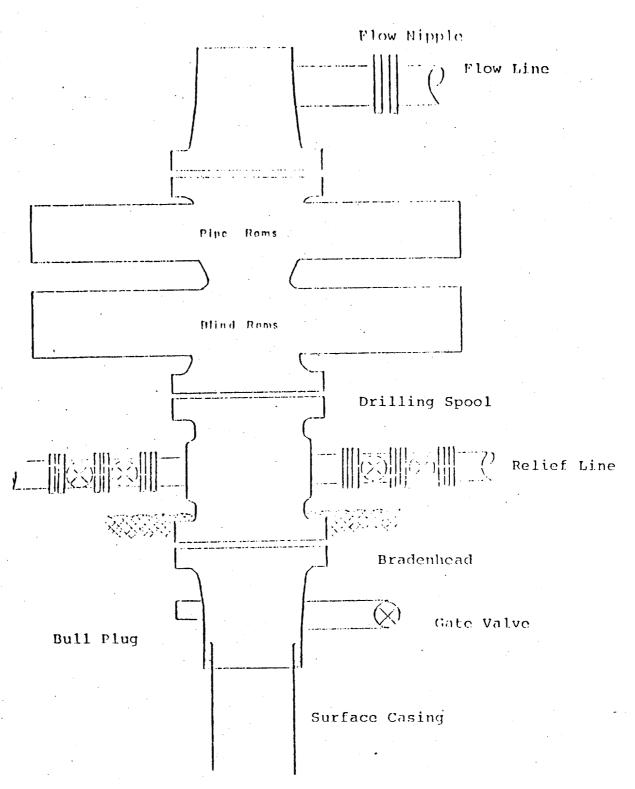

10" 900 x 9 5/8" casing head 10" 900 x 6" 900 xmas tree

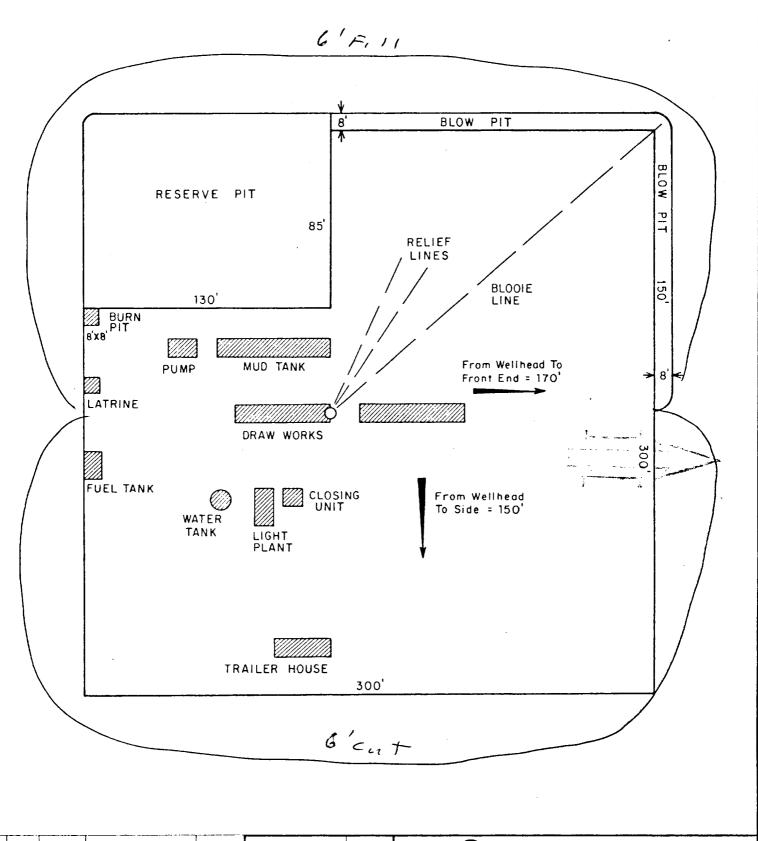

					ENG. REC.		DATE
					DRAWN J.L.H.		8-16-78
					CHECKED		
					CHECKED		
					PROJ. APP.		
PRT.	SEP.	DATE	ТО	w.o.	DESIGN		,
PRINT RECORD			W.O.				


### El Paso Natural Gas Company

TYPICAL LOCATION PLAT FOR MESAVERDE OR DAKOTA DRILL SITE

SCALE:	1"=	50'
--------	-----	-----

DWG.

REV.

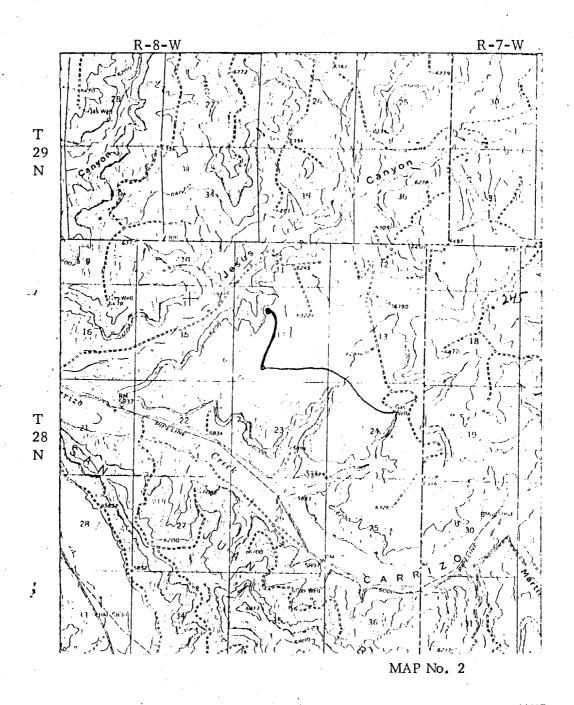

LEGEND OF RIGHT-OF-WAYS

```
EXISTING ROADS


EXISTING PIPELINES + + +

EXISTING ROAD ~ PIPELINE + + +

PROPOSED ROADS

PROPOSED PIPELINES + + +

PROPOSED ROAD & PIPELINE
```

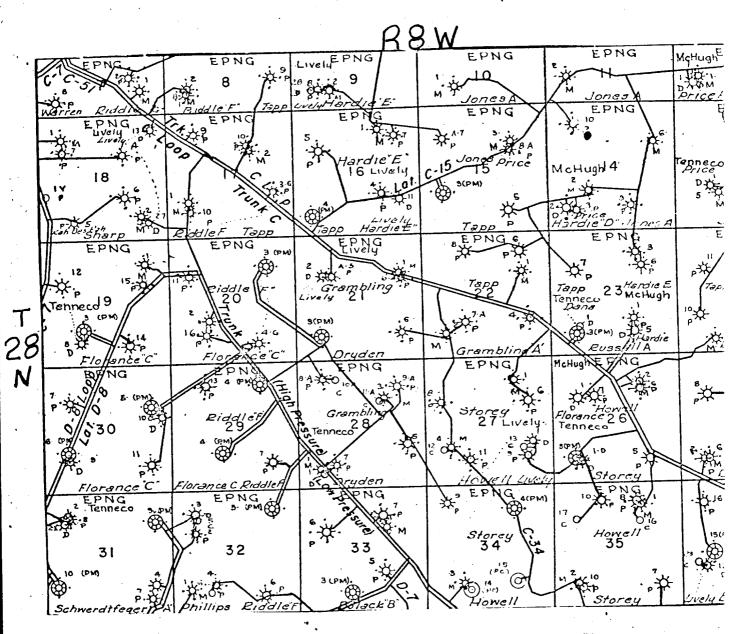

MAP #2

Proposed Location