


Operator TENNECO OIL COMPANY			Lease TAPP			Well No. 11		
Unit Letter M	Section 15	Township 28N	Range 8W	County San Juan				
Actual Footage Location of Well: 1045 feet from the South line and 790 feet from the West line								
Ground Level Elev. 5870		Producing Formation Dakota		Pool Basin Dakota			Dedicated Acreage: 320 Acres	

1. Outline the acreage dedicated to the subject well by colored pencil or hatchure marks on the plat below.
2. If more than one lease is dedicated to the well, outline each and identify the ownership thereof (both as to working interest and royalty).
3. If more than one lease of different ownership is dedicated to the well, have the interests of all owners been consolidated by communitization, unitization, force-pooling, etc?

☐ Yes ☒ No If answer is "yes," type of consolidation _____

If answer is "no," list the owners and tract descriptions which have actually been consolidated. (Use reverse side of this form if necessary.) _____

No allowable will be assigned to the well until all interests have been consolidated (by communitization, unitization, forced-pooling, or otherwise) or until a non-standard unit, eliminating such interests, has been approved by the Commission.

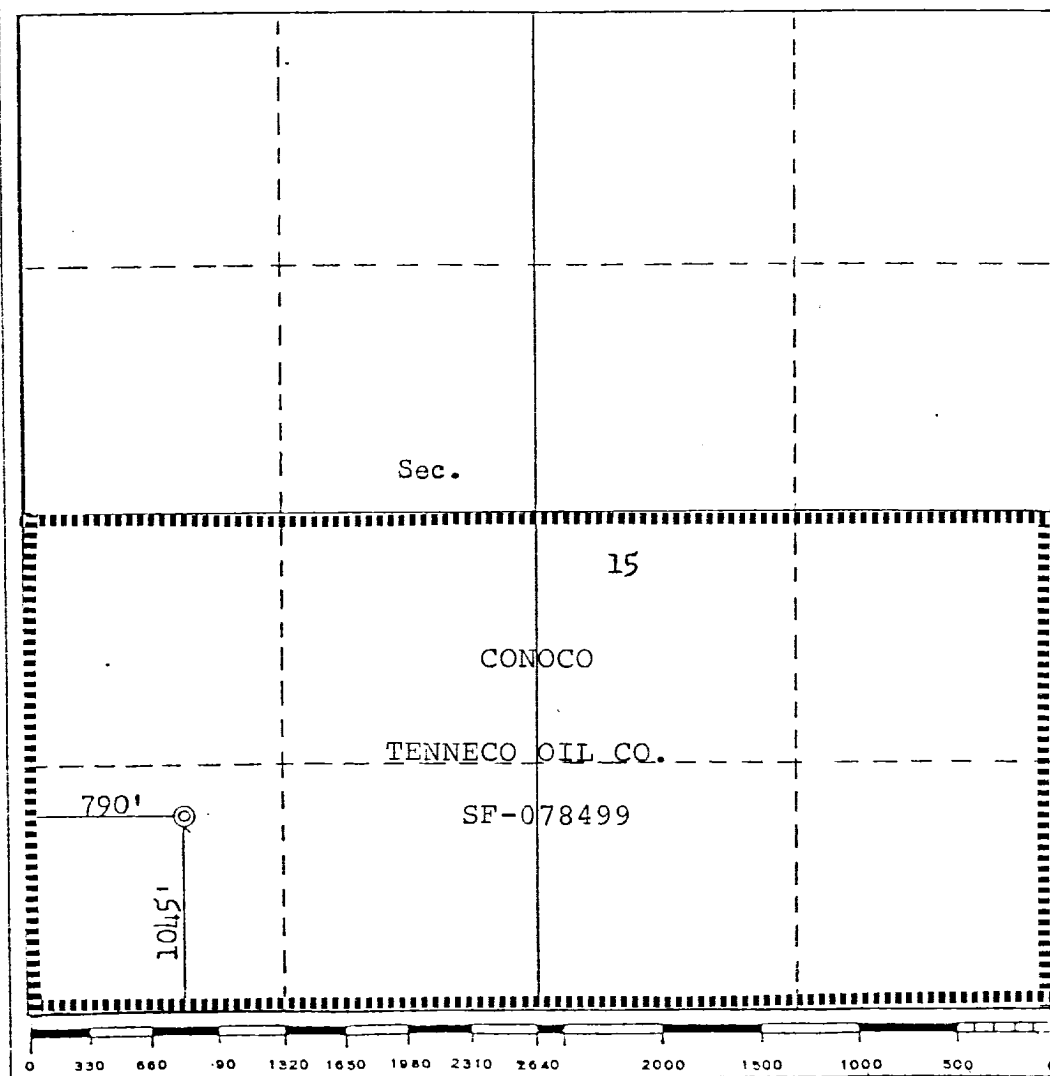

CERTIFICATION

I hereby certify that the information contained herein is true and complete to the best of my knowledge and belief.

J. D. Traywick
Name **J. D. Traywick**
Tenneco Oil Co.

Position
Administration Supervisor

Company
October 30, 1979

Date

I hereby certify that the well location shown on this plat was plotted from field notes of actual surveys made by me or under my supervision, and that the same is true and correct to the best of my knowledge and belief.

Date Surveyed
August 28, 1979

Registered Professional Engineer
and/or Land Surveyor

Fred B. Kerr Jr.
Fred B. Kerr Jr.

Certificate No. **3950**

PROGNOSIS TO DRILL AND COMPLETE

DIVISION: Rocky Mountain

DATE: October 30, 1979

LEASE: Tapp

WELL NO.: 4

LOCATION: 1045' FSL, 790' FWL
Sec. 15, T 28N, R 8W
San Juan County, NM

FIELD: Basin Dakota

ESTIMATED ELEVATION: 5860'

ESTIMATED TOTAL DEPTH: 6819'

PROJECTED HORIZON: Dakota

DRILLING, CASING AND CEMENT PROGRAM:

- 1) MIRU Rotary tools.
- 2) Drill 13 3/4" surface hole to \pm 250'.
- 3) Run 9 5/8", 36#, K-55 ST & C Casing. Set at 250'. Cement w/sufficient volume to circulate to surface.
- 4) Nipple up well head & blow out equipment. Test prior to drilling out to 600 psi 1/2 hour.
- 5) Reduce hole to 8 3/4". Drill to 3,000' with water and Benex.
- 6) Run 7" casing, 23#, K-55. Set at 3,000'. Cement w/sufficient volume to circulate to surface.
- 7) Nipple up well head & rig to drill 6 1/2" hole with air/gas to 6819' total depth.
- 8) Run 4 1/2" liner with \pm 150' overlap inside of 7" casing to TD.
- 9) Cement with sufficient volume to circulate cement to top of liner hanger.

ESTIMATED FORMATION TOPS:

SURFACE - NACIMIENTO

OJO Alamo	1410' (water)	Mancos	4729'
Pictured Cliffs	2178' (gas)	Gallup	5751' (oil/gas)
Cliffhouse	3981' (gas)	Greenhorn	6489'
Menefee	4067' (gas)	Dakota A	6601'
Point Look Out	9563' (gas)		

DRILLING MUD PROGRAM:

- 0 - 250' Native solids. Use sufficient viscosity to clean hole and run surface casing.
- 250' - 3,000' Low Solids. Use sufficient viscosity to clean hole and run intermediate casing.
- 3,000' - TD Gas or air/air mist.

CORING AND TESTING PROGRAM:

No cores or DST's are anticipated.

DEVIATION SURVEYS: 0 - 250' - 2° Max.
250' - 3,500' - 3° Max.
3,500' - TD - 5° Max.

1. Survey surface hole at 100' intervals. Maximum allowable deviation at (1° per 100')
2. FROM SURFACE TO TOTAL DEPTH DEVIATION SURVEYS MUST BE TAKEN EVERY 500' OR EACH TRIP WHICHEVER IS FIRST. This may entail running the TOTCO on wireline. Record each survey on the AAODC Drilling Report Sheet. Maximum allowable change in deviation is 1° per 100'.

SAMPLES:

30' - 2,500' - 3,000'. Insure 300 into Lewis shale.

WELL SURVEYS:

Induction - Gamma Ray
Density - Gamma Ray - Caliper

BOP: 10" x 900 series Double Ram Preventor w/closing unit.

PREVENTORS MUST BE CHECKED FOR OPERATION EVERY 24 HOURS, AND THE CHECK MUST BE RECORDED ON THE AAODC DRILLING REPORT SHEET.

REPORTS

Drilling reports for the past 24 hours will include depth, footage, time distribution, activity breakdown, mud properties, bit record, bottom hole assembly, daily and cumulative mud costs, plus any other pertinent information; will be called into Tenneco Oil Company, Denver, Colorado between 7:30 A.M. and 8:00 A.M.

1. 303-758-7130 (office) - Don Barnes
303-758-7287 - Don Barnes private line - Monday-Friday (before 7:45 A.M.)
2. 303-936-0704 (home) - Don Barnes - weekends and holidays
3. 303-424-1269 (home) - John Owen - if Don Barnes not available

The yellow sheet of the IADC Report to be filled out completely, the original copy of the drilling time recorder, and copies of any invoices from this well signed and received for Tenneco Oil Company will be mailed daily to:

TENNECO OIL COMPANY
PENTHOUSE
720 SOUTH COLORADO BOULEVARD
DENVER, COLORADO 80222

ATTENTION: DRILLING DEPARTMENT

In case of an emergency, notify the following:

1. Mr. Don Barnes, Division Drilling Engineer - 303-936-0704.
2. Mr. John Owen, Project Drilling Engineer - 303-424-1269.
3. Mr. Mike Lacey, Division Production Manager - 303-979-0509.

TAPP 4

1. Existing Roads

- A. Proposed Well Site Location: As surveyed the proposed site is located 1045' FSL, 790' FWL, Sec. 15, T 28N, R 8W, San Juan County, NM. (See Exhibit I, Acreage Dedication Plan.)
- B. Planned Access Route: The access begins at the intersection of Canyon Largo & NM Hwy 64. Proceed down the North side of Canyon Largo for 8 miles to the intersection of Jesus Canyon. Go North up Jesus Canyon for 1 mile, turn south for 0.1 mile to access for proposed site.
- C. Access Road Labelled:
- Color Code: Red - Improved Surface
Blue - New Access Road
- D. Not applicable - the proposed well is a development well.
- E. The proposed well is a development well. See Exhibit II for existing roads within a one mile radius.
- F. Existing Road Maintenance or Improvement Plan:
The existing roads will require minimal maintenance.

2. Planned Access Roads

(Approximately 450' of new road)

- A. Width:
The average width of the road is twenty feet.
- B. Maximum Grades: Less than 5%.
- C. Turnouts:
There are no turnouts planned as sight distance is sufficient.
- D. Drainage Design:
The road is center crowned to allow drainage. The road is flat primarily.
- E. Culverts Use Major Cuts and Fills: None needed.
- F. Surfacing Material:
Native soil has been wetted, bladed and compacted to make the road surface, which is existing.

2. Planned Access Roads (Cont'd)

- G. Gates, Cattleguards, Fence Cuts:
No gates, cattleguards or fences will be needed.
- H. New Roads Centerlined Flagged:
Existing Roads.

3. Location of Existing Wells

The proposed well is a development well. Exhibit III shows existing wells within a one mile radius.

- | | | |
|----|----------------------------------|-----------------|
| A. | Water Wells: | None |
| B. | Abandoned Wells: | None |
| C. | Temporarily Abandoned Wells: | None |
| D. | Disposal Wells: | None |
| E. | Drilling Wells: | None |
| F. | Producing Wells: | See Exhibit III |
| G. | Shut-In Wells: | None |
| H. | Injection Wells: | None |
| I. | Monitoring or Observation Wells: | None. |

4. Location of Existing and/or Proposed Facilities

- A. Existing facilities within one mile owned or controlled by Lessee/Operator:

- | | | |
|-----|-------------------------|-----------------|
| (1) | Tank batteries - | None |
| (2) | Production facilities - | See Exhibit III |
| (3) | Oil Gathering Lines - | None |
| (4) | Gas Gathering Lines - | None |
| (5) | Injection Lines - | None |
| (6) | Disposal Lines - | None |

- B. New facilities in the event of production:

- (1) New facilities will be within the dimensions of the drill pad.
- (2) Dimensions are shown on Exhibit IV.
- (3) Construction Materials/Methods:
Construction materials will be native to the site.
Facilities will consist of a well pad.
- (4) Protection of Wildlife/Livestock: Fenced if required.

4. Location of Existing and/or Proposed Facilities (Cont'd)

B. New facilities in the event of production: (cont'd)

(5) New facilities will consist of a wellhead, tank & Production unit.

C. Rehabilitation of Disturbed Areas:

Following the completion of construction, those areas required for continued production will be graded to provide drainage and minimize erosion. Those areas unnecessary for use will be graded to blend with surrounding topography per BLM recommendations.

5. Location and Type of Water Supply

A. Location and type of water supply:
Water will be hauled from a private source.

B. Water Transportation System:
Water trucks will be used.

C. Water wells:
N/A.

6. Source of Construction Materials

A. Materials:
Construction materials will consist of soil native to the site. Any topsoil, if present, will be stripped and stockpiled as needed.

B. Land Ownership;
The planned site and access road is on federal land administered by the Bureau of Land Management.

C. Materials Foreign to the Site:
N/A.

D. Access Roads:
No additional roads will be required.

7. Methods for Handling Waste Disposal

A. Cuttings:
Cuttings will be contained in the reserve pit.

B. Drilling Fluids:
Drilling fluids will be retained in the reserve pit.

C. Produced Fluids:
Produced fluids, including produced water will be collected in the reserve pit. Any small amount of hydrocarbon that may be produced during testing will be retained in the reserve pit. Prior to clean-up operations, the hydrocarbon material will be skimmed.

7. Methods for Handling Waste Disposal (Cont'd)

- D. Sewage:
Sanitary facilities for sewage disposal will consist of at least one pit toilet, during the driller operations. The pit will be backfilled immediately following completion of the drilling operation.
- E. Garbage:
There probably will not be much putrescible garbage to dispose of. However, it will be disposed of along with the refuse in a constructed burn pit, which will be fenced. The small amount of refuse will be burned and the pit will be covered with a minimum 36 inch cover upon completion.
- F. Clean-Up of Well Site:
Upon the release of the drilling rig, the surface of the drilling pad will be prepared to accommodate a completion rig, if testing indicates potential productive zones. In either case, the "mouse hole" and "rat hole" will be covered to eliminate a potential hazard to livestock. The reserve pit will be fenced to prevent entry of livestock until the pit is backfilled. Reasonable clean up will be performed prior to final restoration of the site.

8. Ancillary Facilities

None required.

9. Well Site Layout

- A. See Exhibit IV.
- B. Location of pits, etc. See Exhibit IV.
- C. Rig orientation etc. See Exhibit IV.
- D. Lining of pits:
Pits will not be lined. They will be covered with a fine mesh netting, if necessary, for the protection of wildlife if fluids are found to be toxic.

10. Plans for Restoration of Surface

- A. Reserve pit clean up:
The pit will be fenced prior to rig release and shall be maintained until clean up. Prior to backfilling any hydrocarbon material on the pit surface will be removed. The fluids and solids contained in the pit shall be backfilled with soil excavated from the site and with soil adjacent to the reserve pit. The restored surface of the reserve pit will be contoured as needed to minimize erosion. The reserve pit area will be seeded per BLM recommendations during the appropriate season following final restoration of the site.

10. Plans for Restoration of Surface (Cont'd)

- B. Restoration Plans - Production Developed:
The reserve pit will be backfilled and restored as described under Item A. In addition, those disturbed areas not required for production will be graded to blend with the surrounding topography, and seeded, per BLM recommendations. The portion of the drill pad required for production and turning areas will be graded to minimize erosion and provide access to production facilities under inclement conditions. Following depletion and abandonment of the site, restoration procedures will be those under Item C. below.
- C. Restoration Plan - No Production Developed:
The reserve pit will be restored as described above. With no production developed, the entire surface disturbed by construction of the drilling pad will be restored. The site will be contoured to blend with the surrounding topography. The site will be seeded according to BLM recommendations. If the new access road is not required for other development plans, it will be obliterated and restored and seeded per BLM recommendations.
- D. Rehabilitation Time Table:
Upon completion of operations the initial clean up of the well site will be performed. Final restoration of the site will be performed as soon as possible according to procedural guidelines published by the USGS and BLM. Seeding of the disturbed areas which are no longer required will be performed during the appropriate season, following final restoration.

11. Other Information

- A. Surface Description: The site is located on a slight negative slope to the NW. Jesus Canyon is located 0.1 mile to the NW. The soil is sandy w/some sandstone outcrops. The principal vegetation is Pinon, Juniper, Sage, Rabbitbrush, Snakeweed & Prickly Pear Cactus.
- B. Surface Use Activities:
The surface is federally owned and managed by the BLM. The predominant surface use is mineral exploration and production.
- C. Proximity of Water, Dwellings and Historical Sites:
1. Water:
There are no reservoirs or streams in the immediate area.
 2. Occupied Dwellings:
There are no occupied dwellings or buildings in the area.
 3. Sites:
An archeological reconnaissance has been performed for this location and clearance has been granted.


12. Operator's Field Representative

Donald S. Barnes
Division Drilling Engineer
Tenneco Oil Company
720 South Colorado Blvd.
Penthouse
Denver, CO 80222
(303) 758-7130 Ext. 212

13. Certification

I hereby certify that I, or persons under my direct supervision, have inspected the proposed drill site and access route; that I am familiar with the conditions as they actually exist; that the statements made in this plan are, to the best of my knowledge, true and correct; and that the proposed work performed by Tenneco Oil Company and its contractors and subcontractors will conform to this plan.


Date: October 30, 1979



J. D. TRAWICK
ADMINISTRATION SUPERVISOR

142700

UNITED STATES
DEPARTMENT OF THE INTERIOR
GEOLOGICAL SURVEY

EXHIBIT 11
TENNECO OIL CO. TAPP #4
1045' FSL, 790' FWL
SEC. 15, T 28N, R 8W
SAN JUAN COUNTY, NEW MEXICO

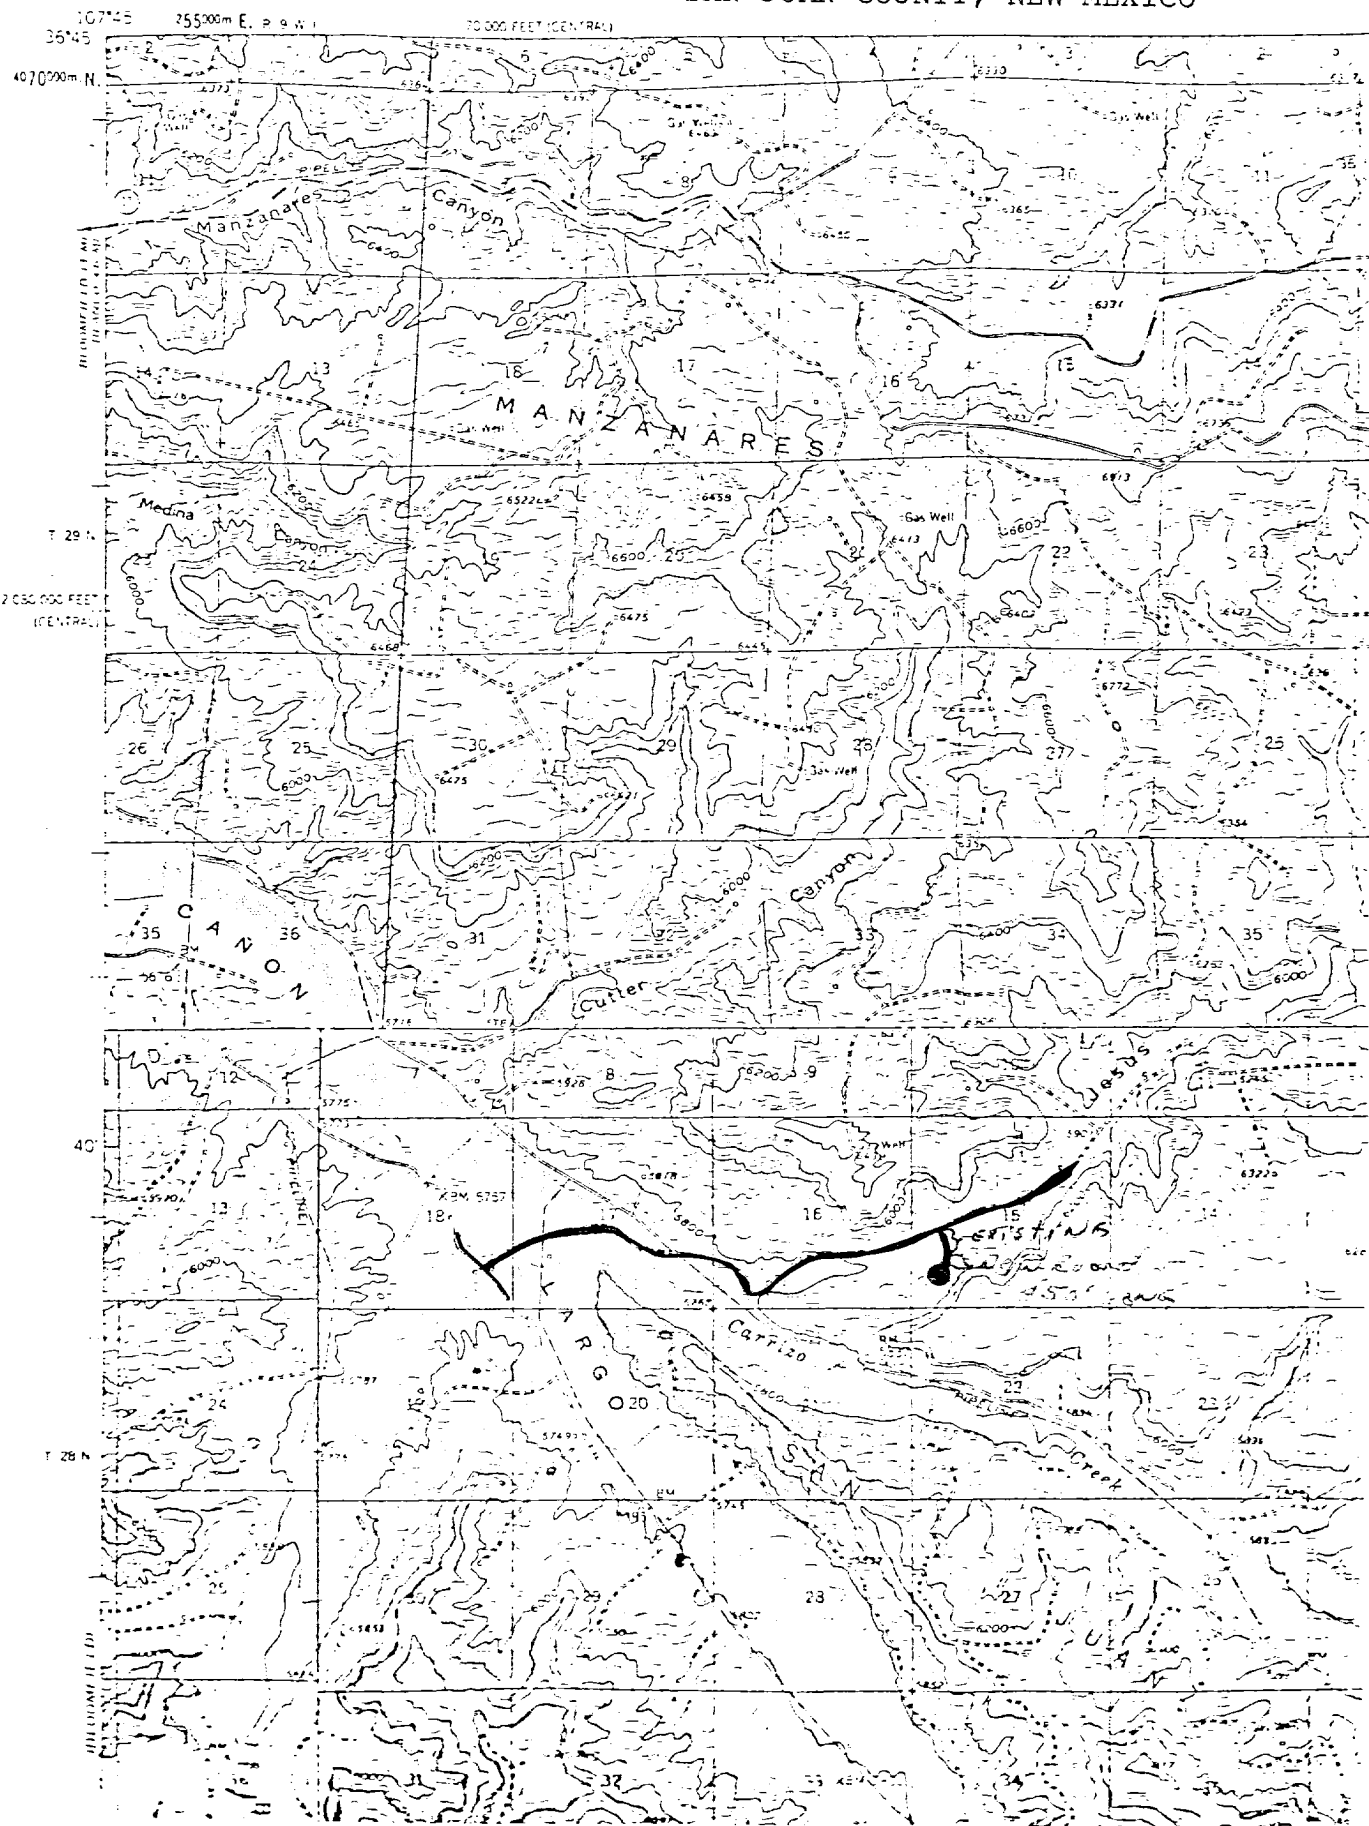


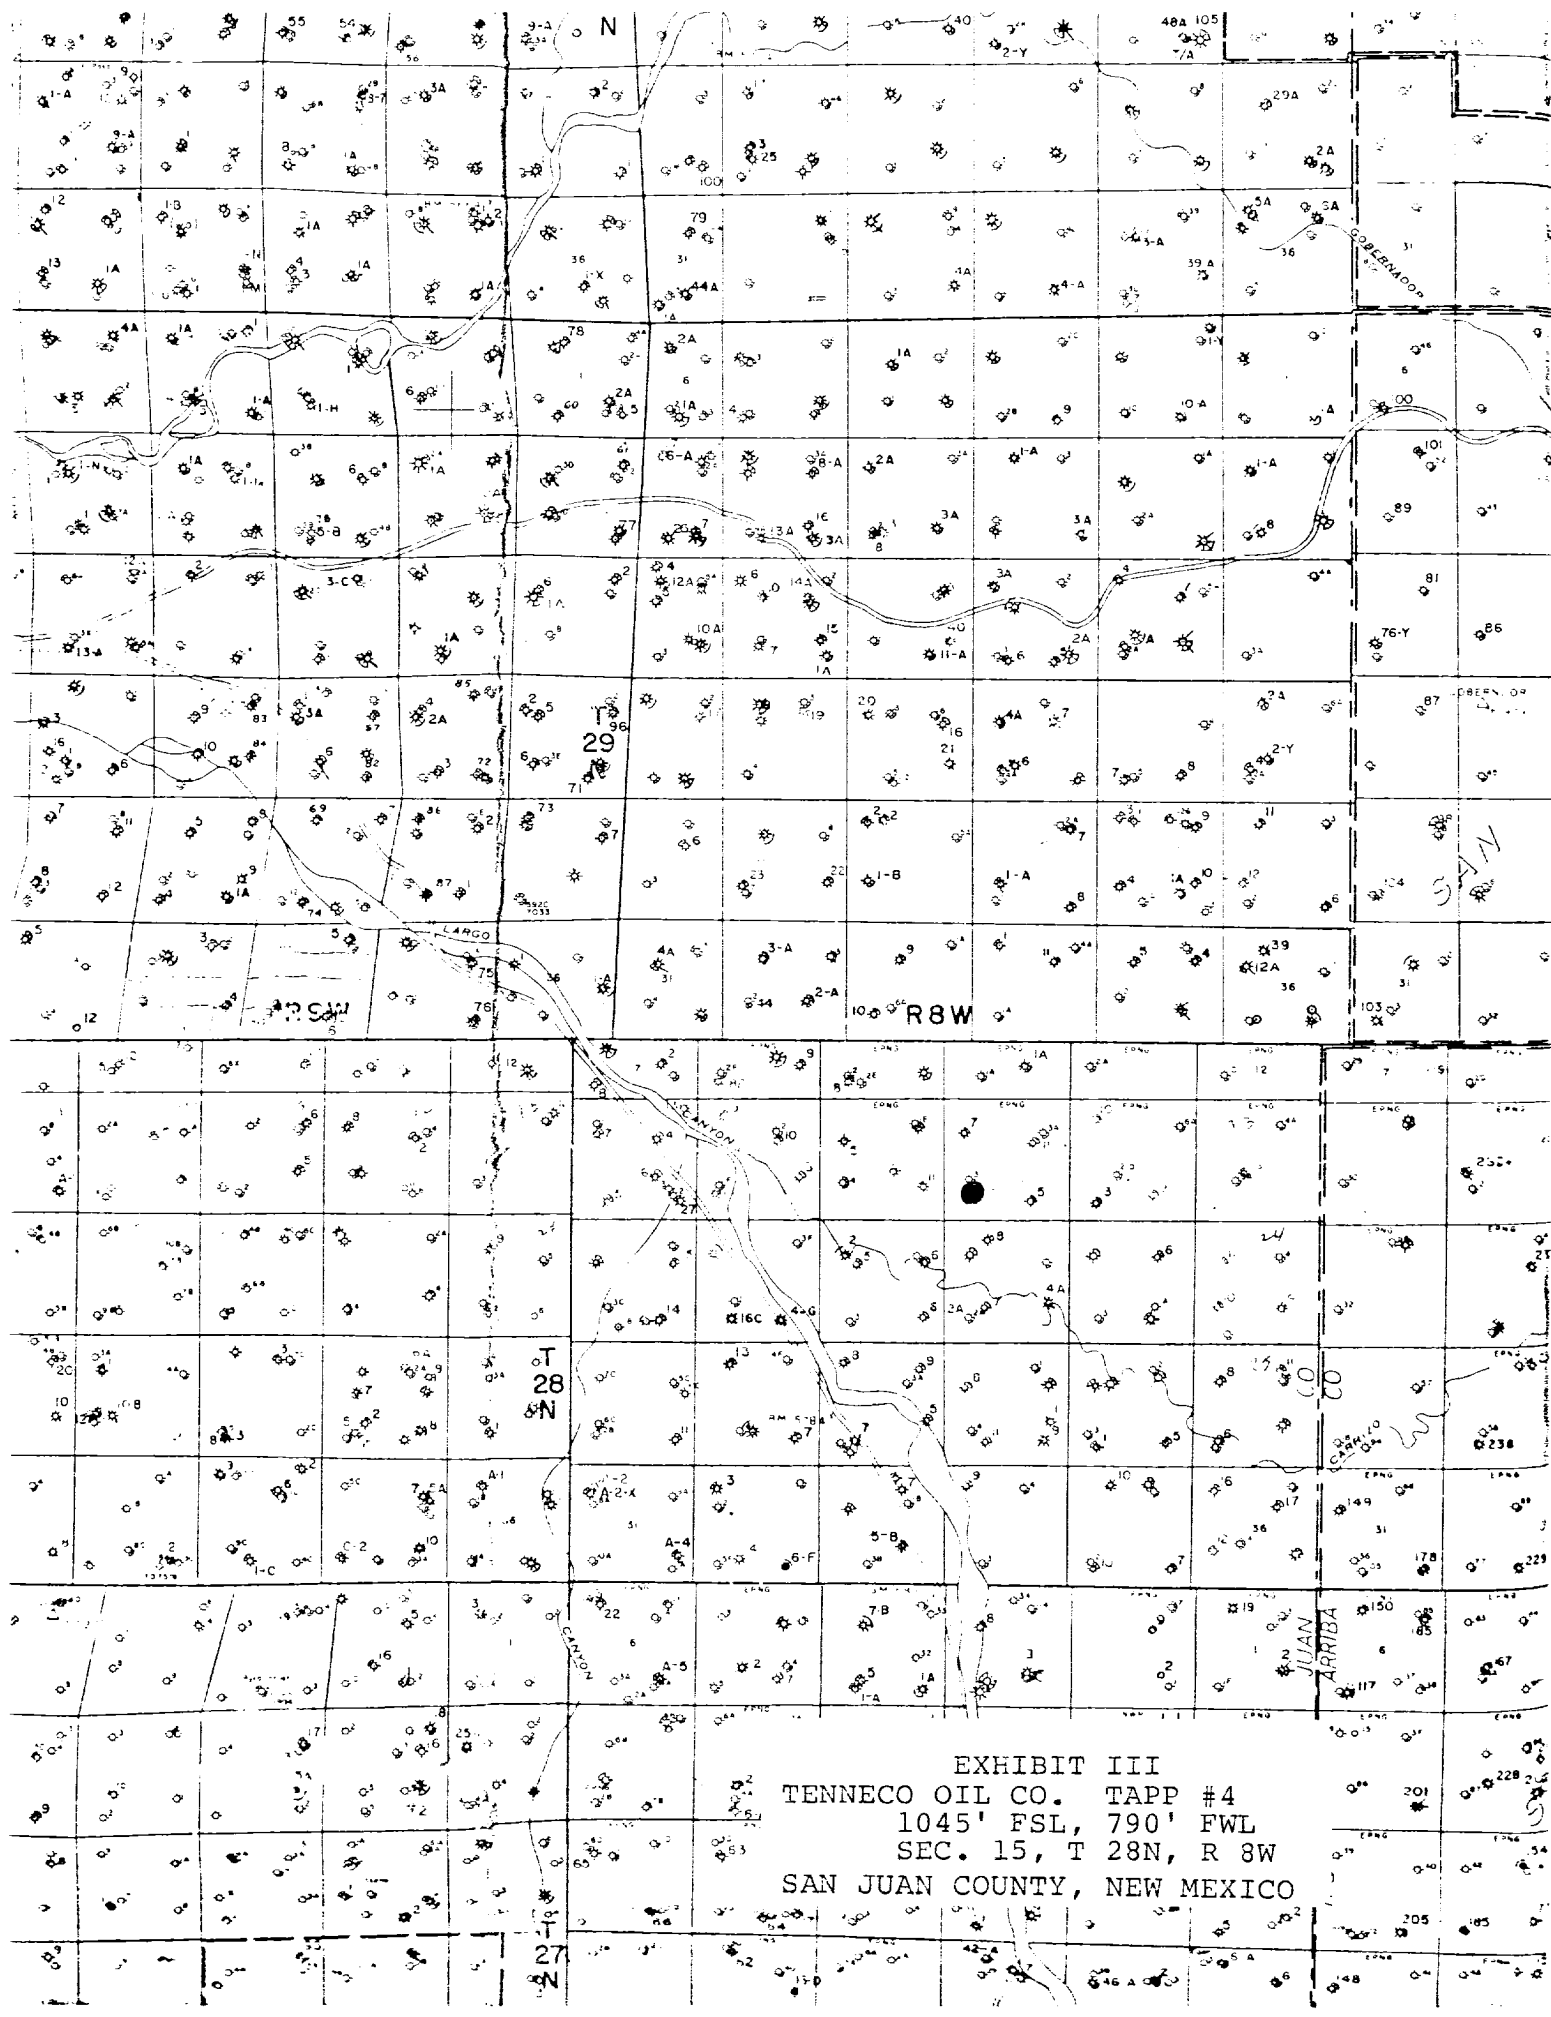


CALCULATION SHEET

EXHIBIT IV

SUBJECT	DRILLING WELL SITE LAYOUT TAPP #4	DATE: 11-79
LOCATION	1045' FSL, 790' FWL, SEC. 15, T 28N, R 8W	
SAN JUAN COUNTY, NEW MEXICO		

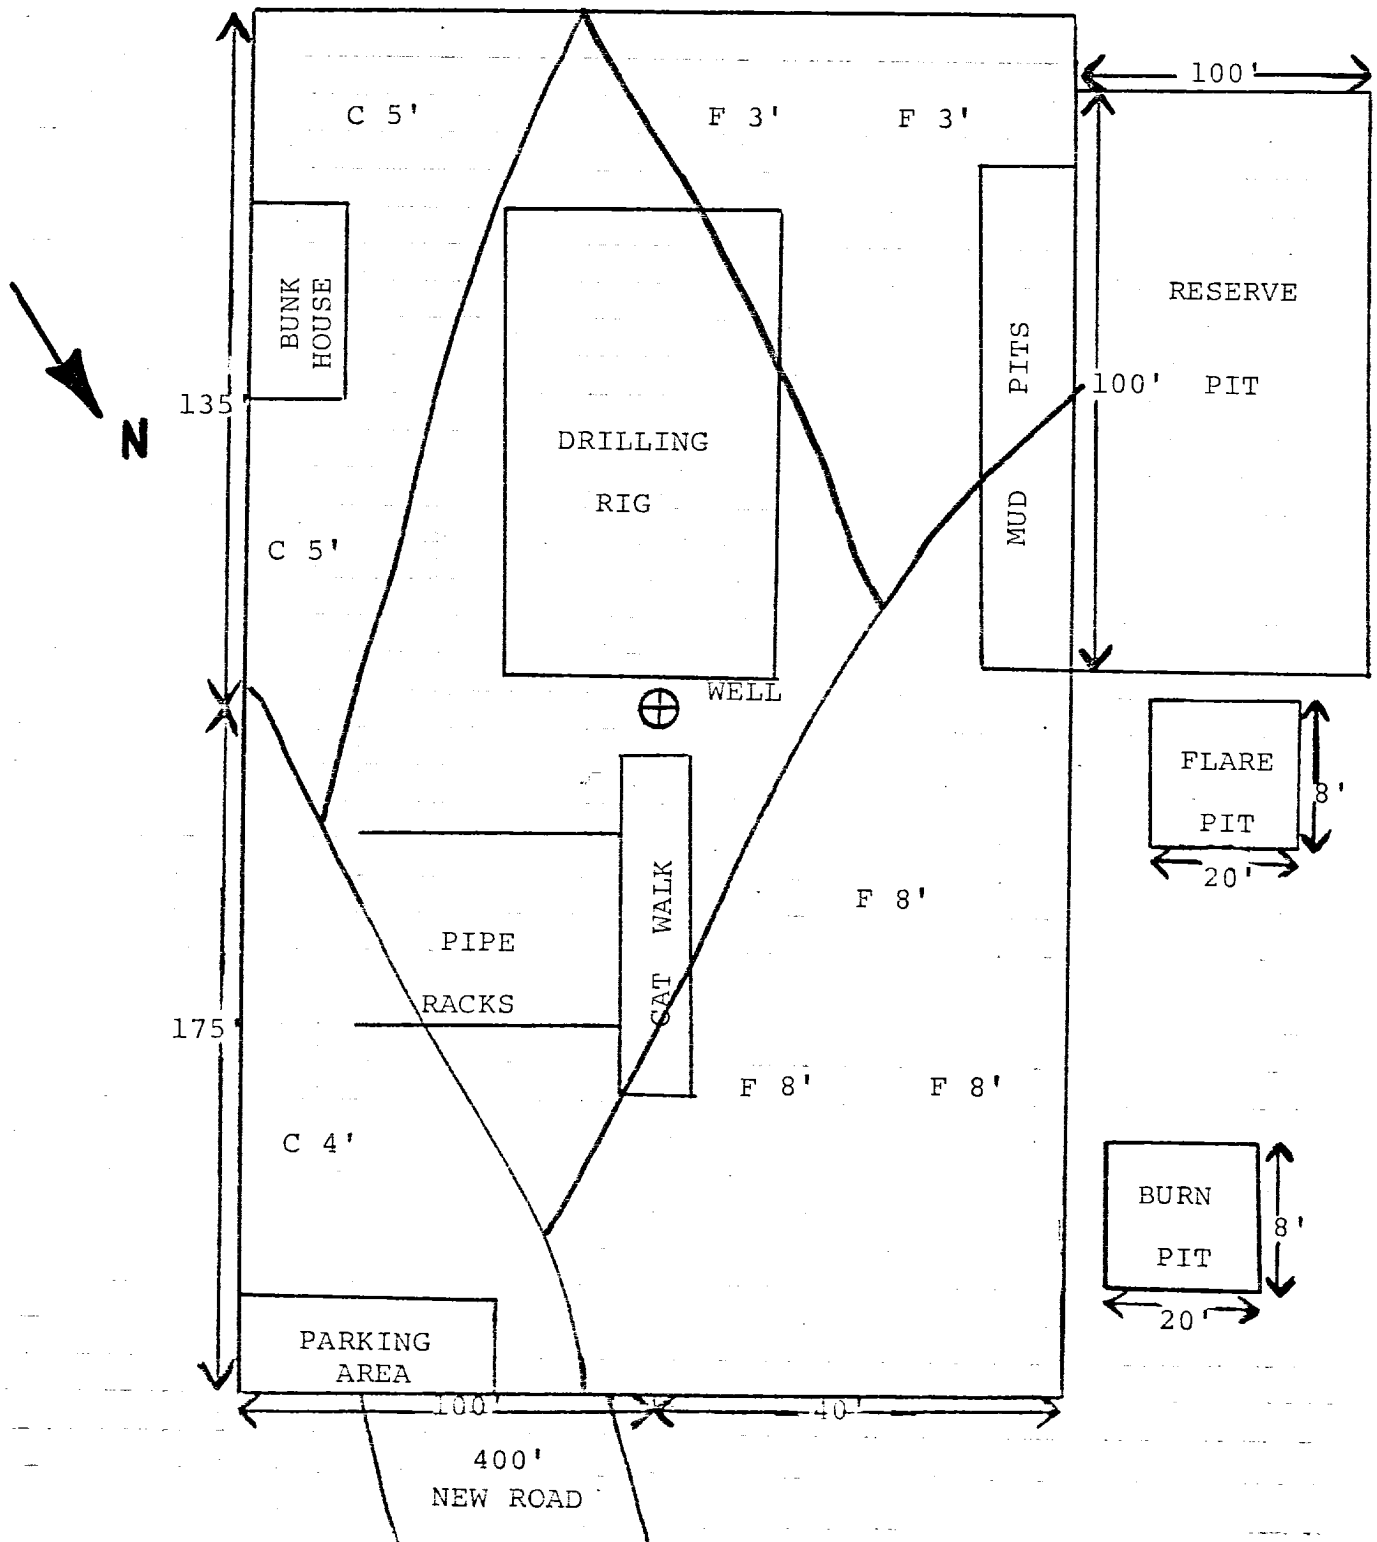

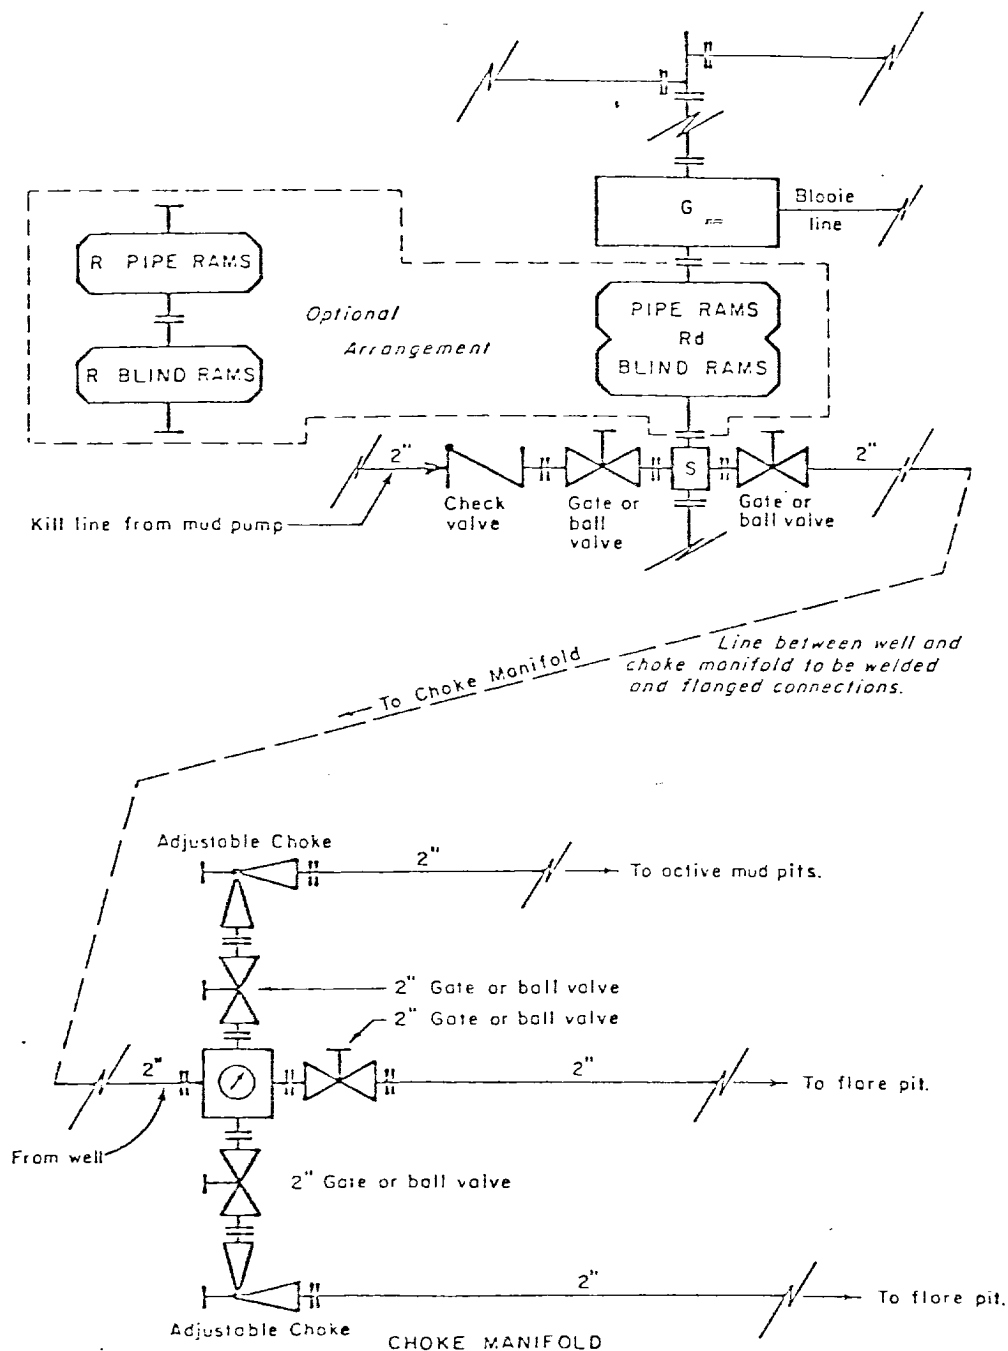

All equipment to be 3,000 psi working pressure except as noted.

- Rd Double ram type preventer with two sets of rams.
- R Single ram type preventer with one set of rams.
- S Drilling spool with side outlet connections for choke and kill lines.
- G Rotating head 150 psi working pressure minimum

ARRANGEMENT C
TENNECO OIL COMPANY
ROCKY MOUNTAIN DIVISION
REQUIRED MINIMUM
BLOWOUT PREVENTER AND
CHOKE MANIFOLD

J. MAGILL 10-26-70 EVI