

UNITED STATES
DEPARTMENT OF THE INTERIOR
GEOLOGICAL SURVEY


APPLICATION FOR PERMIT TO DRILL, DEEPEN, OR PLUG BACK

1a. TYPE OF WORK DRILL <input checked="" type="checkbox"/> DEEPEN <input type="checkbox"/> PLUG BACK <input type="checkbox"/>		5. LEASE DESIGNATION AND SERIAL NO. 30-075-24098 SF 077329	
b. TYPE OF WELL OIL WELL <input type="checkbox"/> GAS WELL <input checked="" type="checkbox"/> OTHER <input type="checkbox"/>		6. IF INDIAN, ALLOTTEE OR TRIBE NAME	
2. NAME OF OPERATOR Tenneco Oil Company		7. UNIT AGREEMENT NAME	
3. ADDRESS OF OPERATOR 720 S. Colorado Blvd. Denver, Co. 80222		8. FARM OR LEASE NAME CM Morris Com	
4. LOCATION OF WELL (Report location clearly and in accordance with any State requirements.) At surface 1120 FNL 1700 FEL 1140' 580' At proposed prod. zone		9. WELL NO. 1-E	
14. DISTANCE IN MILES AND DIRECTION FROM NEAREST TOWN OR POST OFFICE* 9.6 Miles SouthWest of Blanco, N.M.		10. FIELD AND POOL, OR WILDCAT Basin Dakota	
10. DISTANCE FROM PROPOSED* LOCATION TO NEAREST PROPERTY OR LEASE LINE, FT. (Also to nearest drilg. unit line, if any)		11. SEC., T., R., M., OR BLK. AND SURVEY OR AREA Sec 10, T27N, R10W	
18. DISTANCE FROM PROPOSED LOCATION* TO NEAREST WELL, DRILLING, COMPLETED, OR APPLIED FOR, ON THIS LEASE, FT.		12. COUNTY OR PARISH San Juan	
16. NO. OF ACRES IN LEASE 400		13. STATE N.M.	
20. ROTARY OR CABLE TOOLS Rotary		17. NO. OF ACRES ASSIGNED TO THIS WELL E 320.00	
21. ELEVATIONS (Show whether DF, RT, GR, etc.) 6227 GR		22. APPROX. DATE WORK WILL START* ASAP	

23. PROPOSED CASING AND CEMENTING PROGRAM				
SIZE OF HOLE	SIZE OF CASING	WEIGHT PER FOOT	SETTING DEPTH	QUANTITY OF CEMENT
12 1/4"	8 5/8" new	24#K55	+ 300'	Circulate to surface
7 7/8"	4 1/2" new	10.5#K55	+6720'	Circulate to surface in 2 stages

See Attached

- 1) If non productive plug & abandon per USGS/BLM requirements.
- 2) No abnormal temperatures, pressures or other geologic hazards are expected
- 3) The gas is Dedicated



IN ABOVE SPACE DESCRIBE PROPOSED PROGRAM: If proposal is to deepen or plug back, give data on present productive zone and proposed new productive zone. If proposal is to drill or deepen directionally, give pertinent data on subsurface locations and measured and true vertical depths. Give blowout preventer program, if any.

24. SIGNED M. Lee Freeman TITLE Staff Production Analyst DATE December 19, 1979
(This space for Federal or State office use)

PERMIT NO. _____ APPROVAL DATE _____

APPROVED BY _____ TITLE _____ DATE _____
CONDITIONS OF APPROVAL, IF ANY:*ch Frank*

*See Instructions On Reverse Side

NMOCC

OIL CONSERVATION DIVISION

STATE OF NEW MEXICO
ENERGY AND MINERALS DEPARTMENTP. O. BOX 2088
SANTA FE, NEW MEXICO 87501Form C-107
Revised 10-1-78

All distances must be from the outer boundaries of the Section.


Operator TENNECO OIL COMPANY			Lease C. M. MORRIS COM		Well No. 1-E
Unit Letter B	Section 10	Township 27N	Range 10W	County San Juan	
Actual Footage Location of Well: 1190 feet from the North line and 1580 feet from the East line					
Ground Level Elev. 6227	Producing Formation Dakota		Pool Basin Dakota		Dedicated Acreage: 320.00 Acres

1. Outline the acreage dedicated to the subject well by colored pencil or hatchure marks on the plat below.
2. If more than one lease is dedicated to the well, outline each and identify the ownership thereof (both as to working interest and royalty).
3. If more than one lease of different ownership is dedicated to the well, have the interests of all owners been consolidated by communitization, unitization, force-pooling, etc?

☐ Yes ☐ No If answer is "yes," type of consolidation Communitization

If answer is "no," list the owners and tract descriptions which have actually been consolidated. (Use reverse side of this form if necessary.)

No allowable will be assigned to the well until all interests have been consolidated (by communitization, unitization, forced-pooling, or otherwise) or until a non-standard unit, eliminating such interests, has been approved by the Commission.

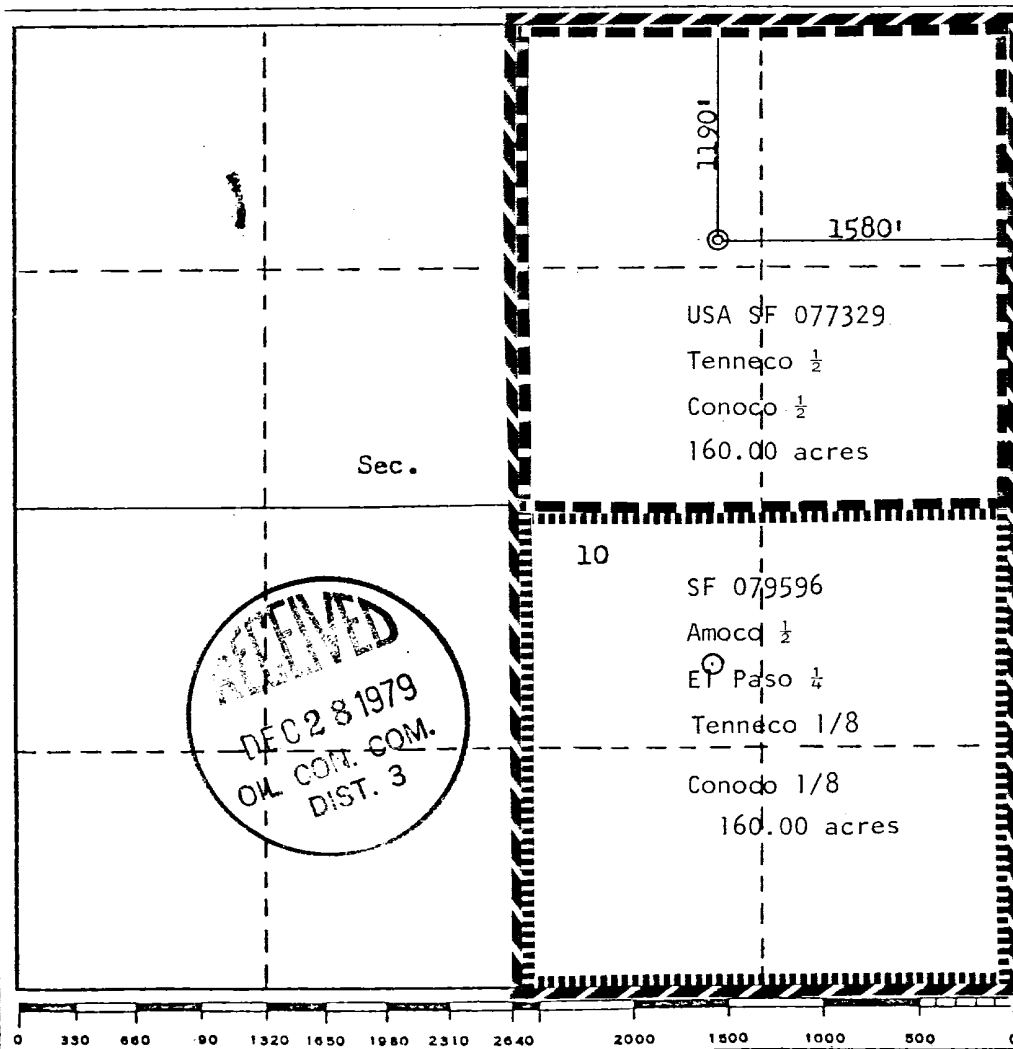

CERTIFICATION

I hereby certify that the information contained herein is true and complete to the best of my knowledge and belief.

M. Lee Freeman
Name

M. Lee Freeman
Position

Staff Production Analyst
Company

December 20, 1979
Date

I hereby certify that the well location shown on this plat was plotted from field notes of actual surveys made by me or under my supervision, and that the same is true and correct to the best of my knowledge and belief.

Date Surveyed
November 30, 1979

Registered Professional Engineer
and/or Land Surveyor

Fred B. Kerr Jr.
Fred B. Kerr Jr.

Certificate No. 3950

TEINNECO OIL COMPANY

PROGNOSIS TO DRILL AND COMPLETE

DIVISION: Rocky Mountain

DATE: September 19, 1979

LEASE: C. M. Morris Com

WELL NO.: 1-E

LOCATION: 1120' FNL, 1700' FEL
Sec. 10, T 27N, R 10W
San Juan County, New Mexico

FIELD: Basin Dakota

ESTIMATED ELEVATION: 6230'

ESTIMATED TOTAL DEPTH: 6720'

PROJECTED HORIZON: Dakota

DRILLING, CASING AND CEMENT PROGRAM:

- (1) MIRURT.
- (2) Drill 12 1/4" hole to + 300'. Run 8 5/8" O.D. 24# K-55 ST&C casing to 300'. Cement with sufficient volume to circulate cement to surface.
- (3) WOC minimum of 12 hours. Nipple up BOE. Test BOP, blind and pipe rams, casing and manifold to 600 psi prior to drilling out for 1/2 hour.
- (4) Drill 7 7/8" hole to T.D.
- (5) Run open hole logs as required.
- (6) Run 4 1/2", 10.5#, K-55 ST&C casing. Cement in 2 stages with stage collar + 4800'.
- (7) Cement first stage with sufficient volume to raise cement to stage tool. Circulate and WOC 4 hours between stages. Cement 2nd stage with sufficient volume to circulate to surface.
- (8) Set casing slips, cut off 4 1/2" casing. Nipple up well head.
- (8a) If well is non-productive, P & A according to Regulatory agency specifications.
- (9) RD. MORT.

ESTIMATED FORMATION TOPS: Surface nacimiento

OJO	1270'	Mancos	4300'
Pictured Cliffs	2140'	Gallup	5650'
Lewis	2200'	Greenhorn	6440'
Cliffhouse	3650'	Dakota	6530'
Menzies	3790'	TD	6720'
Point Lookout	4500'		

DRILLING AND TESTING PROGRAM:

- 0 - 350' Native Solids. V/C WL. Use sufficient Viscosity to clean hole and run casing.
- 350" - TD Low Solids. 15 cc WL. Use sufficient viscosity to clean hole. Log and run casing.

CORING AND TESTING PROGRAM:

NONE

DEVIATION SURVEYS:

1. Survey surface hole at 100' intervals. Maximum allowable deviation at (1° per 100')
2. FROM SURFACE TO TOTAL DEPTH DEVIATION SURVEYS MUST BE TAKEN EVERY 500' OR EACH TRIP WHICHEVER IS FIRST. This may entail running the TOTCO on wireline. Record each survey on the AAODC Drilling Report Sheet. Maximum allowable change in deviation is 1° per 100'.

SAMPLES:

Surface to 6300'	30' samples
6300' to T.D.	10' samples

WELL SURVEYS:

Majority of logs will be cased hole. GR-Neutron, or TDT. A few will be open hole GR-Induction.

BOP: 10" 900 Series Hydraulic operated with complete shut off and pipe rams.

PREVENTORS MUST BE CHECKED FOR OPERATION EVERY 24 HOURS, AND THE CHECK MUST BE RECORDED ON THE AAODC DRILLING REPORT SHEET.

REPORTS

Drilling reports for the past 24 hours will include depth, footage, time distribution, activity breakdown, mud properties, bit record, bottom hole assembly, daily and cumulative mud costs, plus any other pertinent information, will be called into Tenneco Oil Company, Denver, Colorado, between 7:30 a.m. and 8:00 a.m.

1. 303-758-7130 (office) Don Barnes.
303-758-7287 (office) Don Barnes' private line, Monday-Friday (before 7:45 a.m.)
2. 303-936-0704 (home) Don Barnes, weekends and holidays.
3. 303-795-0221 (home) John Owen, if Don Barnes is not available.


The yellow sheet of the IADC Report to be filled out completely, the original copy of the drilling time recorder, and copies of any invoices from this well, signed and received for Tenneco Oil Company will be mailed daily to:

TENNECO OIL COMPANY
ROCKY MOUNTAIN DIVISION
PENTHOUSE, 720 SOUTH COLORADO BOULEVARD
DENVER, COLORADO 80222

ATTENTION: Drilling Department

In case of emergency, notify the following:

1. Mr. Don Barnes, Division Drilling Engineer - 303-936-0704
2. Mr. John Owen, Project Drilling Engineer - 303-795-0221
3. Mr. Mike Lacey, Division Production Manager - 303-979-0509

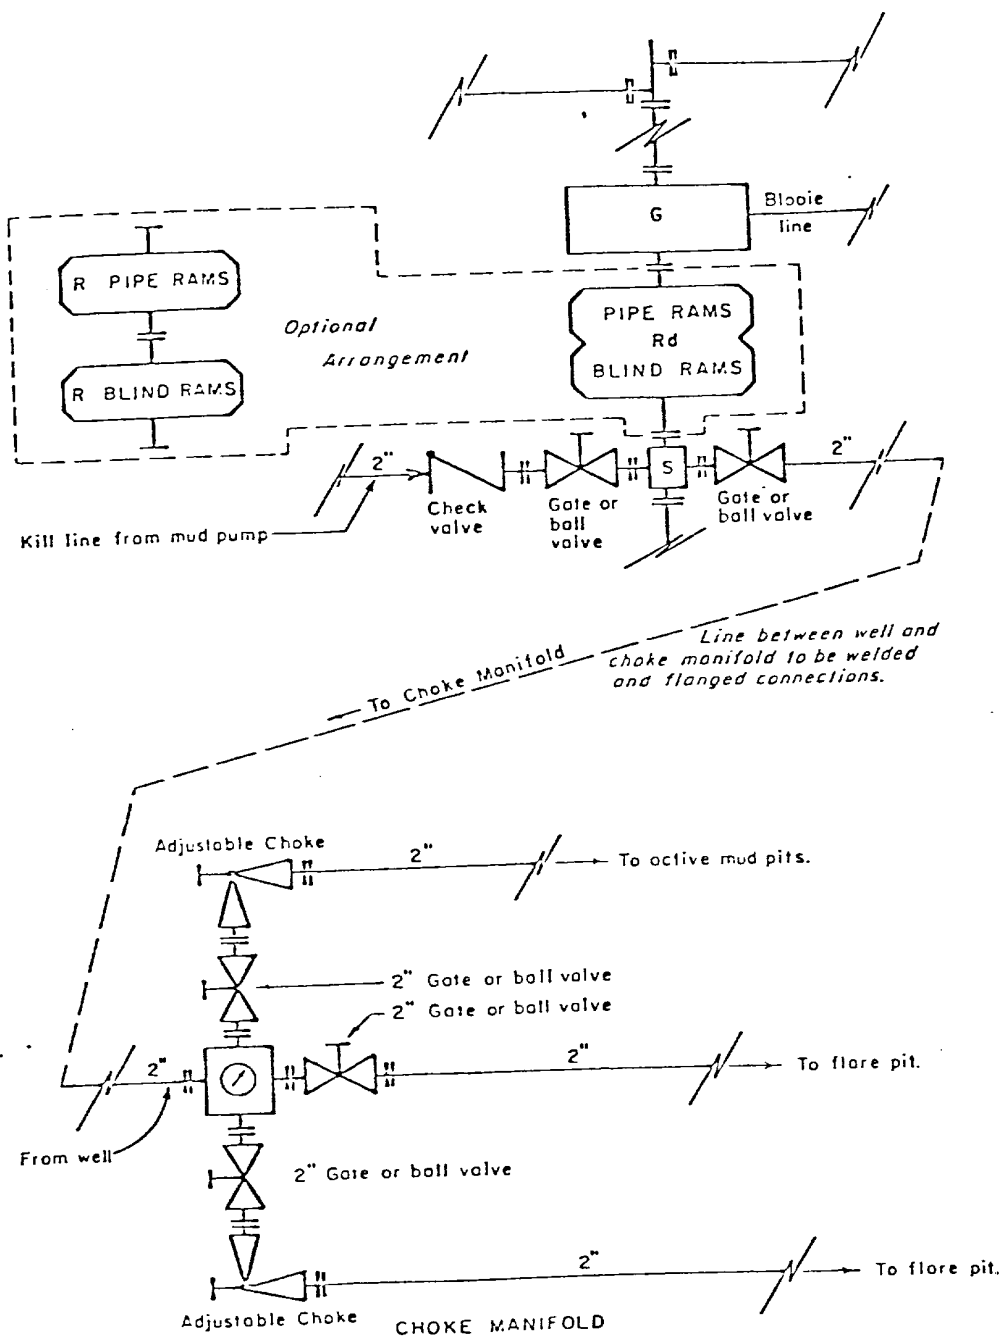

All equipment to be 3,000 psi working pressure except as noted.

- Rd Double ram type preventer with two sets of rams.
- R Single ram type preventer with one set of rams.
- S Drilling spool with side outlet connections for choke and kill lines.
- G Rotating head 150 psi working pressure minimum


ARRANGEMENT C

TENNECO OIL COMPANY
ROCKY MOUNTAIN DIVISION
REQUIRED MINIMUM
BLOWOUT PREVENTER AND
CHOKE MANIFOLD

J. MAGILL 10-26-79 EVI

- 1.. Existing Road - Please refer to Map No. 1 which shows the existing roads. New roads which will be required have been marked on this map. All existing and new roads will be properly maintained during the duration of this project.
- 2.. Planned Access Roads - Please refer to Map No. 1. The grade of the access roads will be consistent with that of the local terrain. The road surface will not exceed twenty feet (20') in width. Upon completion of the project, the access road will be adequately drained to control soil erosion. Drainage facilities may include ditches, water bars, culverts or any other measure deemed necessary by trained Company personnel to insure proper drainage. Gates and/or cattleguards will be installed if necessary.
- 3.. Location of Existing Wells - Please refer to Map No. 2.
- 4.. Location of Tank Batteries, Production Facilities, and Production Gathering and Service Lines - Please refer to Maps No. 1 and No. 2. Map No. 2 shows the existing roads and new proposed access roads. All known production facilities are shown on these two maps.
- 5.. Location and Type of Water Supply - Water for the proposed project will be obtained from a private source.
- 6.. Source of Construction Materials - No additional materials will be required to build either the access road or the proposed location.
- 7.. Methods of Handling Waste Materials - All garbage and trash materials will be put into a burn pit shown on the attached Location Plat No. 1. When clean-up operations are begun on the proposed project, the burn pit with its refuse will be buried to a depth of at least three feet (3'). A latrine, the location of which is also shown on Plat No. 1. will be provided for human waste. If large amounts of liquids are left in the reserve pit after completion of the project, the pit will be fenced until the liquids have had adequate time to dry. The location clean-up will not take place until such time as the reserve pit can be properly covered over to prevent run-off from carrying any of these materials into the watershed. No earthen pit will be located on natural drainage; all earthen pits will be so constructed as to prevent leakage from occurring.

8. Ancillary Facilities - No camps or airstrips will be associated with this project.
9. Wellsite Layout - Please refer to the attached Plat No. 1.
10. Plans for Restoration of the Surface - After completion of the proposed project the location will be cleaned and leveled. The location will be left in such a condition that will enable reseeded operations to be carried out. Seed mixture as designated by the responsible government agency will be used. The reseeded operation will be performed during the time period set forth by the regulatory body. The location production equipment will be painted as designated by the responsible government agency.
11. Other Information - The proposed site is located up Armenta Canyon on level topography. The drainage is to the North by sheet wash. The soil is sandy loam supporting pinon and juniper.
12. Operator's Representative -
SEE DRILLING PROGNOSIS
13. Certification - I hereby certify that I, or persons under my direct supervision, have inspected the proposed drillsite and access route; that I am familiar with the conditions which presently exist; that the statements made in this plan are, to the best of my knowledge, true and correct; and that the work associated with the operations proposed herein will be performed by Tenneco Oil Company and its contractors and sub-contractors in conformity with this plan and the terms and conditions under which it is approved.


L. Freeman
Staff Production Analyst

LF/gh

TENNECO OIL COMPANY


CALCULATION SHEET

EXHIBIT

ANY

CT DRILLING WELL SITE LAYOUT *CM Morris Com 1 E*TION *1190 FNL 1580 FEL SEC 10, T27N, R10W*DATE *12/19/79*

*Level Topography, Minimal dirt work
Required.*

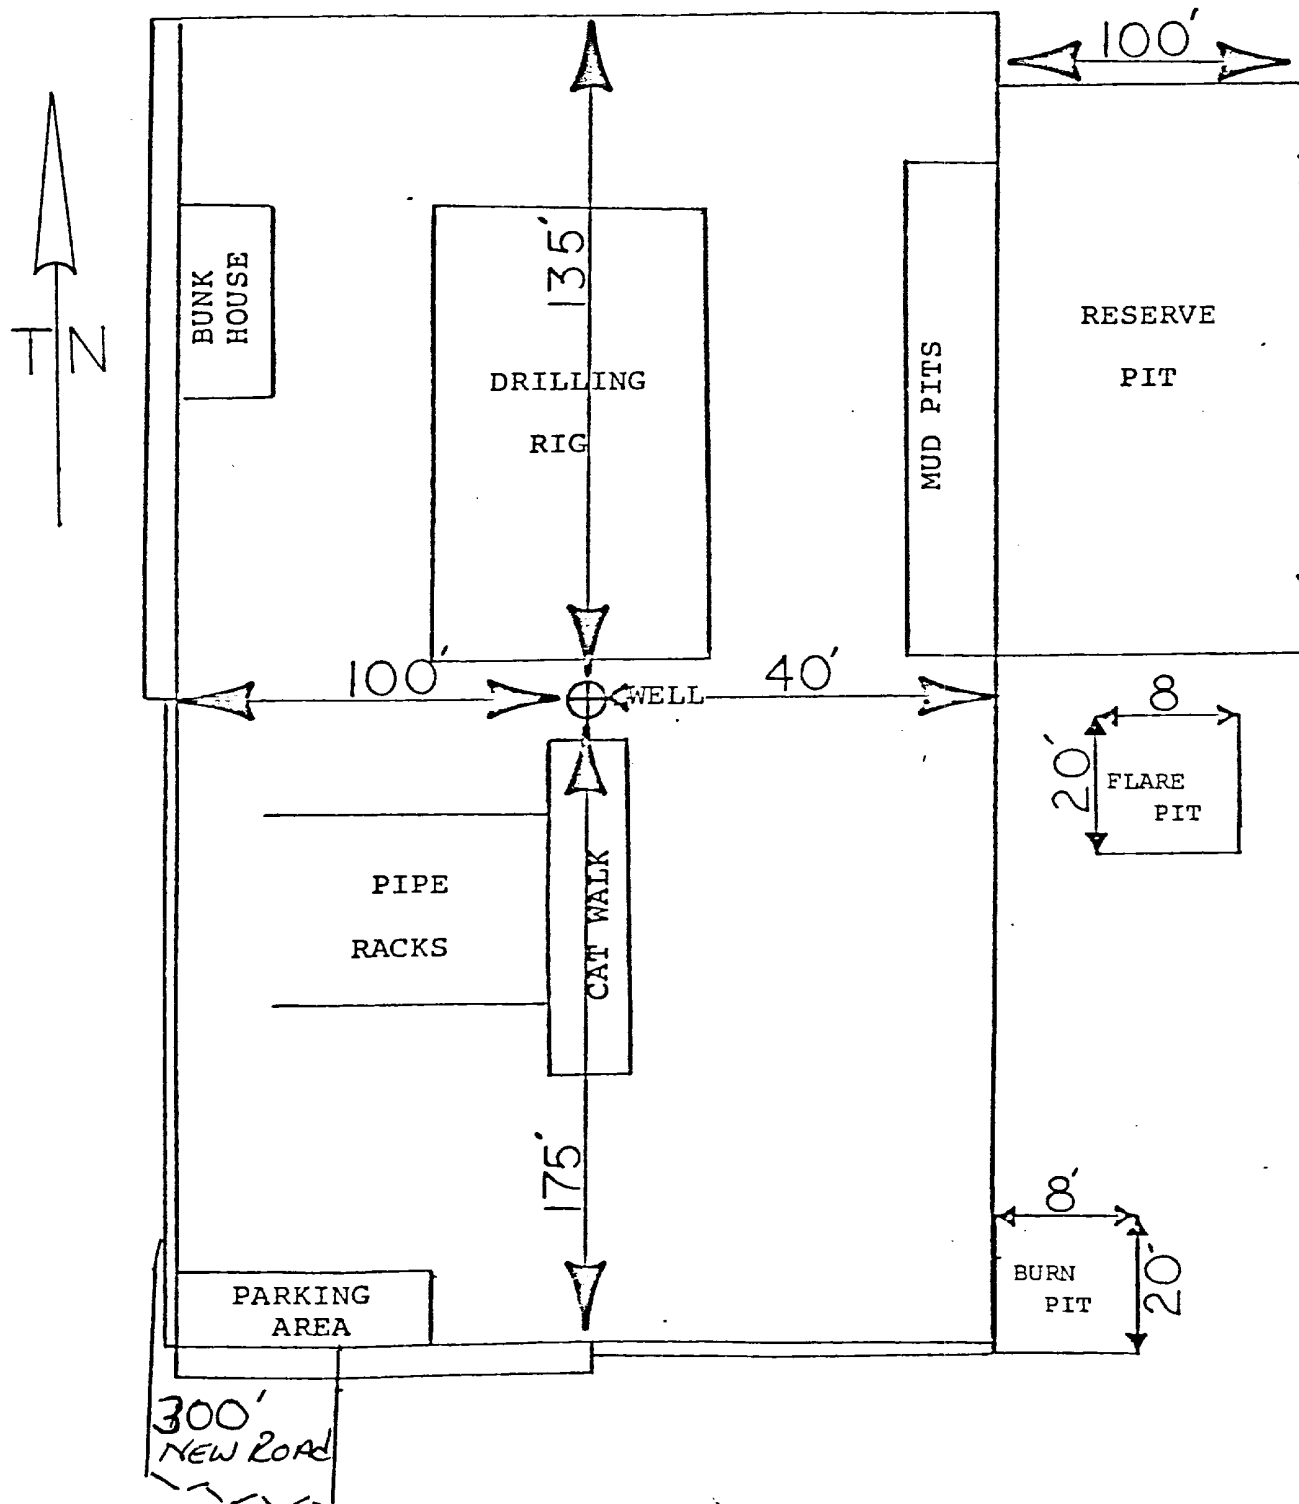




Vicinity Map for
 TENNECO OIL COMPANY #1-E C. M. Morris Com
 1120' FNL 1700' FEL Sec 10-T27N-R10W
 SAN JUAN COUNTY, NEW MEXICO

RIOW

SAW



ABERFANNO UNIT

ABERFANNO UNIT