

UNITED STATES  
DEPARTMENT OF THE INTERIOR  
GEOLOGICAL SURVEY

**SUNDRY NOTICES AND REPORTS ON WELLS**

(Do not use this form for proposals to drill or to deepen or plug back to a different reservoir. Use Form 9-331-C for such proposals.)

1. oil  well    gas  well    other

2. NAME OF OPERATOR  
Amoco Production Company

3. ADDRESS OF OPERATOR  
501 Airport Dr. Farmington, NM 87401

4. LOCATION OF WELL (REPORT LOCATION CLEARLY. See space 17 below.)  
860' FNL x 1820' FWL  
AT SURFACE: Sec 21, T27N, R10W  
AT TOP PROD. INTERVAL: same  
AT TOTAL DEPTH: same

5. LEASE  
SF-077386-A

6. IF INDIAN, ALLOTTEE OR TRIBE NAME

7. UNIT AGREEMENT NAME

8. FARM OR LEASE NAME  
E. J. Johnson "C"

9. WELL NO.  
1E

10. FIELD OR WILDCAT NAME  
Basin Dakota

11. SEC., T., R., M., OR BLK. AND SURVEY OR AREA  
NE/4, NW/4 Section 21, T27N, R10W

12. COUNTY OR PARISH  
San Juan

13. STATE  
NM

14. API NO.  
30-045-24206


15. ELEVATIONS (SHOW DF, KDB, AND WD)  
6013' GL

16. CHECK APPROPRIATE BOX TO INDICATE NATURE OF NOTICE, REPORT, OR OTHER DATA

REQUEST FOR APPROVAL TO:

SUBSEQUENT REPORT OF:

- TEST WATER SHUT-OFF
- FRACTURE TREAT
- SHOOT OR ACIDIZE
- REPAIR WELL
- PULL OR ALTER CASING
- MULTIPLE COMPLETE
- CHANGE ZONES
- ABANDON\*
- (other) completion

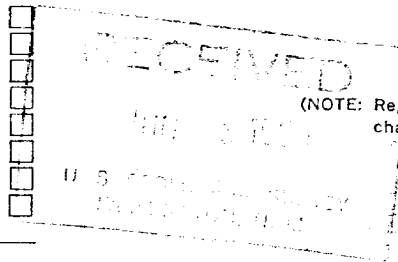

(NOTE: Report results of multiple completion or zone change on Form 9-330.)

17. DESCRIBE PROPOSED OR COMPLETED OPERATIONS (Clearly state all pertinent details, and give pertinent dates, including estimated date of starting any proposed work. If well is directionally drilled, give subsurface locations and measured and true vertical depths for all markers and zones pertinent to this work.)\*

Completion operations commenced on 5-21-80. Total depth of the well is 6552', and plugback depth is 6511'. Perforated interval from 6435-6457', with 2 spf, a total of 44, .38" holes. Sand-water fraced with 18,000 gal of frac fluid and 36,000# of 20-40 sand. Perforated intervals from 6238-6253', 6278-6284', 6348-6363', and 6379-6392', with 2 spf, a total of 98, .38" holes. Sand-water fraced with 92,179 gallons of frac fluid, and 204,000# of 20-40 sand. Landed 2-3/8" tubing at 6480'.

Swabbed well and released rig on 5-26-80.

Subsurface Safety Valve: Manu. and Type \_\_\_\_\_ Set @ \_\_\_\_\_ ft.

18. I hereby certify that the foregoing is true and correct

SIGNED E. E. SVOBODA TITLE Dist. Adm. Supvr. DATE 5-30-80

(This space for Federal or State office use)

APPROVED BY \_\_\_\_\_ TITLE \_\_\_\_\_ DATE \_\_\_\_\_

CONDITIONS OF APPROVAL, IF ANY:

ACCEPTED FOR RECORD

JUL 5 1980

\*See Instructions on Reverse Side

FARMINGTON, N.M.  
BY [Signature]