

UNITED STATES  
DEPARTMENT OF THE INTERIOR  
GEOLOGICAL SURVEY

**SUNDRY NOTICES AND REPORTS ON WELLS**

(Do not use this form for proposals to drill or to deepen or plug back to a different reservoir. Use Form 9-331-C for such proposals.)

1. oil ☐ well ☐ gas ☒ well ☐ other ☐

2. NAME OF OPERATOR  
DEPCO, Inc.

3. ADDRESS OF OPERATOR  
1000 Petroleum Building--Denver, CO 80202

4. LOCATION OF WELL (REPORT LOCATION CLEARLY. See space 17 below.)  
AT SURFACE: 790' FSL, 900' FWL (SW $\frac{1}{4}$  SW $\frac{1}{4}$ )  
AT TOP PROD. INTERVAL: Same  
AT TOTAL DEPTH: Same

16. CHECK APPROPRIATE BOX TO INDICATE NATURE OF NOTICE, REPORT, OR OTHER DATA

REQUEST FOR APPROVAL TO: SUBSEQUENT REPORT OF:

TEST WATER SHUT-OFF ☐ ☐

FRACTURE TREAT ☐ ☐

SHOOT OR ACIDIZE ☐ ☐

REPAIR WELL ☐ ☐


PULL OR ALTER CASING ☐ ☐

MULTIPLE COMPLETE ☐ ☐

CHANGE ZONES ☐ ☐

ABANDON\* ☐ ☐

(other) Supplementary Report

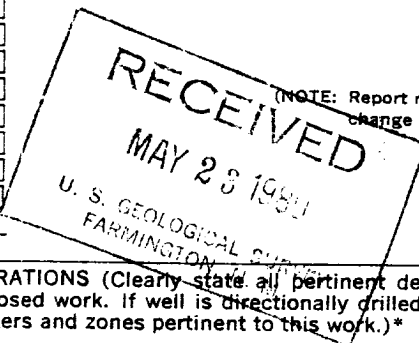

5. LEASE  
NM03523

6. IF INDIAN, ALLOTTEE OR TRIBE NAME  
--

7. UNIT AGREEMENT NAME  
--

8. FARM OR LEASE NAME  
Federal 31

9. WELL NO.  
14-~~14~~

10. FIELD OR WILDCAT NAME  
West Kutz P.C.

11. SEC., T., R., M., OR BLK. AND SURVEY OR AREA  
Sec. 31-T27N-R11W

12. COUNTY OR PARISH  
San Juan

13. STATE  
New Mexico

14. API NO.  
30-045-24308

15. ELEVATIONS (SHOW DF, KDB, AND WD)  
6062' GR, 6074' KB

(NOTE: Report results of multiple completion or zone change on Form 9-330.)

17. DESCRIBE PROPOSED OR COMPLETED OPERATIONS (Clearly state all pertinent details, and give pertinent dates, including estimated date of starting any proposed work. If well is directionally drilled, give subsurface locations and measured and true vertical depths for all markers and zones pertinent to this work.)\*

Spud 12 noon 5-14-80. Drilled 12 $\frac{1}{4}$ " hole to 140' KB. Ran 3 jts 8-5/8" 24# K55 surface casing, landed @ 138' KB. Cemented w/130 sx Regular Class "B" w/3% CaCl<sub>2</sub>,  $\frac{1}{4}$ # flocele/sx. Circulate cement to surface. WOC 12 hrs. Drilled to 1852' TD. Ran DIL and CNL-FDC w/GR logs. Set 4 $\frac{1}{2}$ " 10.5# K55 casing @ 1852' KB. Cemented w/275 sx 50/50 Pozmix containing 6% gel,  $\frac{1}{4}$ # celflake/sx, 12 $\frac{1}{4}$ # Gilsonite/sx. Followed by 100 sx Regular Class "B". Cement circulated to surface. Rig released 3:30 AM 5-17-80.

Subsurface Safety Valve: Manu. and Type None Set @        Ft.


18. I hereby certify that the foregoing is true and correct

SIGNED W. F. Schwenn Dist. Supt.

(This space for Federal or State office use)

APPROVED BY        TITLE        DATE       

CONDITIONS OF APPROVAL, IF ANY:



ACCEPTED FOR RECORD

MAY 30 1980

FARMINGTON DISTRICT

BY       

\*See Instructions on Reverse Side